

ACORN • USER


BBC MICRO

ELECTRON

ATOM

APRIL 1985 £1.20

THIS ISSUE
WORTH
£200 TO YOU

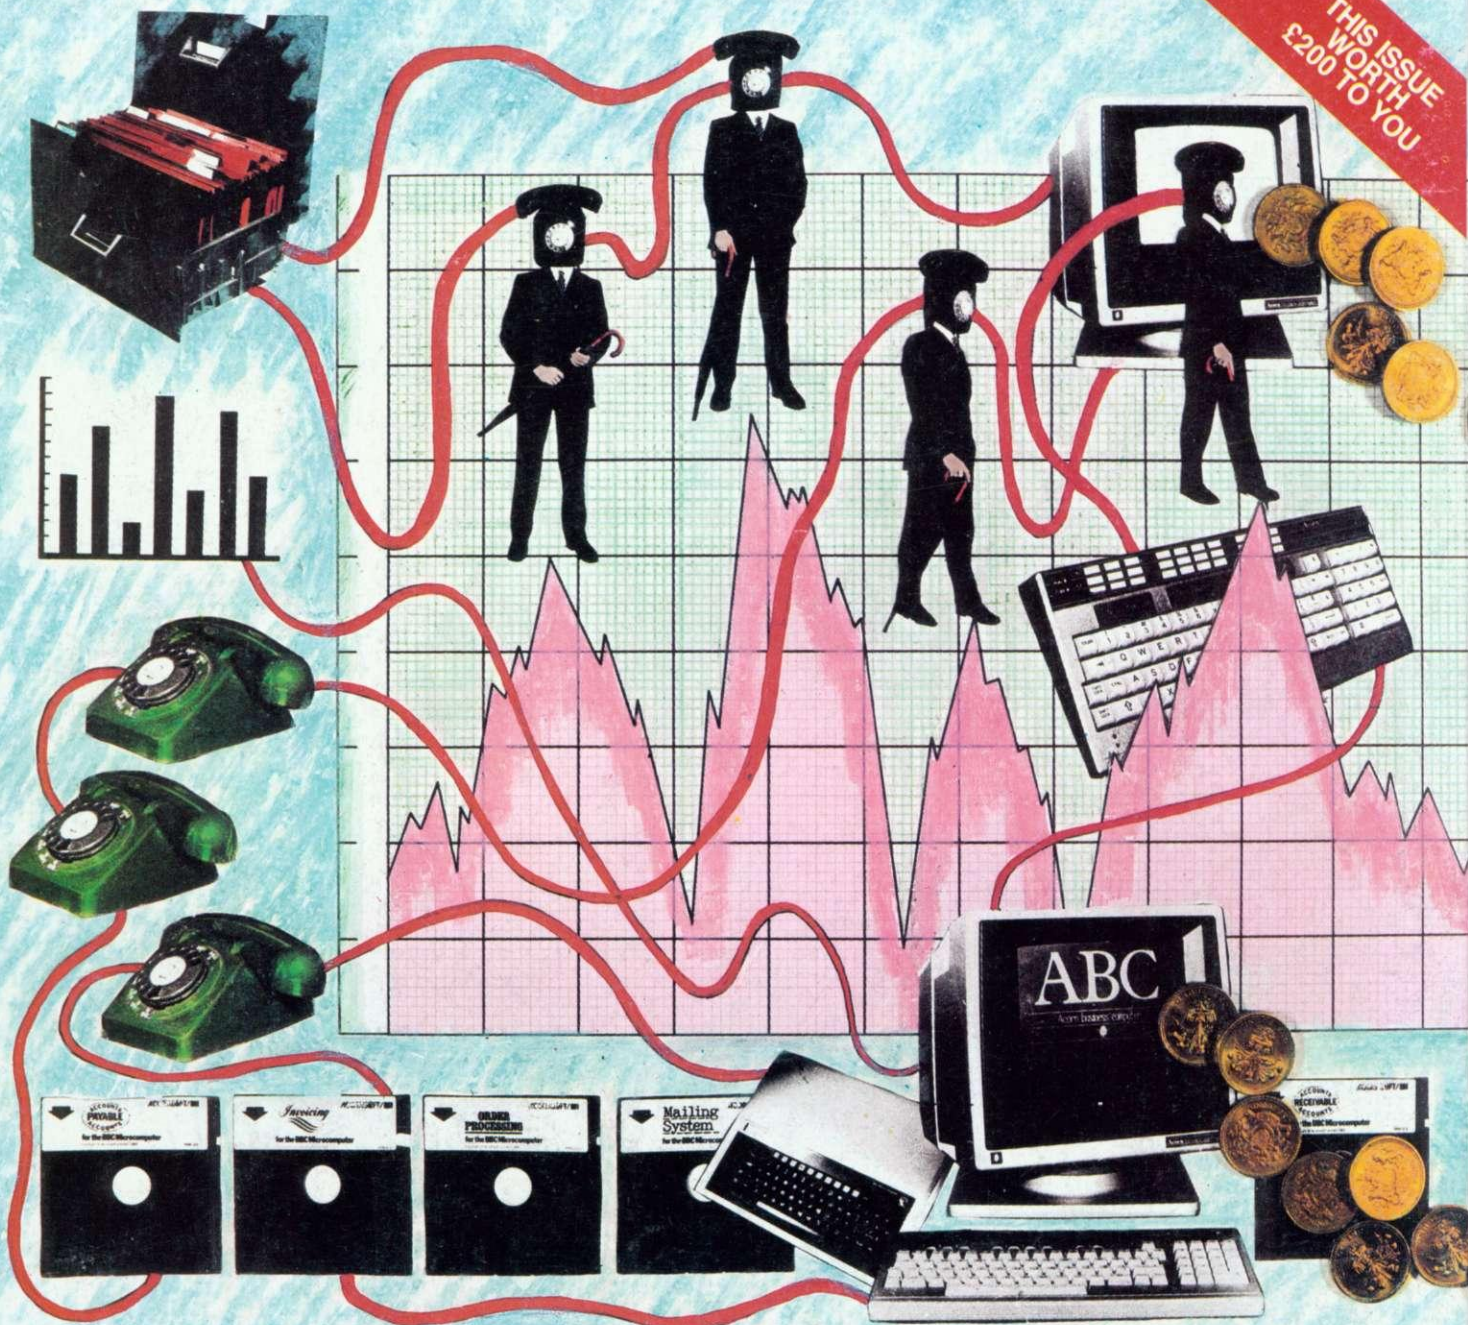

◆
**SAVE ON
SOFTWARE:
£200
ACORNSOFT
COUPONS
IN THIS
ISSUE**
◆

Z80 POWER: SERIOUS BUSINESS

CP/M software: Make the most of the BBC and ABC • Business choice: Torch or BBC for a Z80 add-on? • Graphics: Plot your graphs for maths • Hints & Tips: April Fools • Logo: Life after turtle graphics • £50 modem: our verdict.

50 ACORNSOFT GAMES ■ 20 GRANADA BOOKS TO WIN!

◆
**16
PAGES
OF
BBC
MICRO
PROGRAM
LISTINGS**
◆

MUSIC MICRO PLEASE!



FOR FURTHER INFORMATION AND ADDRESS OF NEAREST DEALER,
TELEPHONE 0602 394000



£99.95
incl. VAT

The highly acclaimed

echo
echo
echo

musical synthesizer

For the BBC Model B & Commodore 64 microcomputers

A musical package for users of all ages

For the beginner or the accomplished musician, the superb touch sensitive Echo keyboard will soon have you exploring the musical possibilities of your micro.

Complete with Software

Supplied complete with Organmaster in disk or cassette form. A powerful, yet easy to use software allowing you to imitate various instruments such as piano, flute, violin and piccolo, as well as providing a wide range of percussion effects, and a synthesizer mode allowing you complete control of the voice envelopes, so you can design your own sounds.

Optional speaker/amplifier

Echosound, a speaker/amplifier combination capable of delivering more than 5 watts to its 6" double cone speaker, is available for the BBC micro. At the tweak of a knob, you can switch from the whisper of a sobbing violin to the roar of a fairground engine. **The Future.** Designed not only for today, but with the future in mind. A continuous programme of new software is being produced, aimed at providing you with ever new exciting sounds and capabilities from your Echo keyboard.



(Both
prices incl. VAT)
£49.95
Fitting kit
£4.95




Regent House, Lenton Street,
Sandiacre, Nottingham NG10 5DJ
Telephone (0602) 394000



MICROWORLD

COMPUTER GROUP

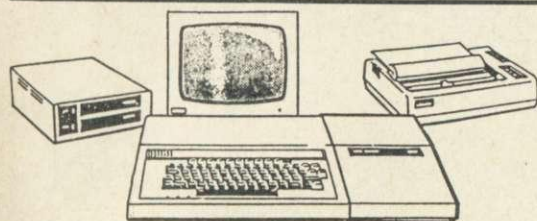

ACORN DISTRIBUTOR

SPECIAL OFFER


Word Processor System

- BBC B plus DFS
- Cumana Dual 200K Drives
- Yanyen Monitor
- View and Viewsheet
- All leads, cables etc.
- Shinwa CPA 80 Printer

LIMITED OFFER ONLY £999 INC.

ACORN MICROS IN SCHOOLS SCHEME SPONSOR

BRANCHES THROUGHOUT SCOTLAND

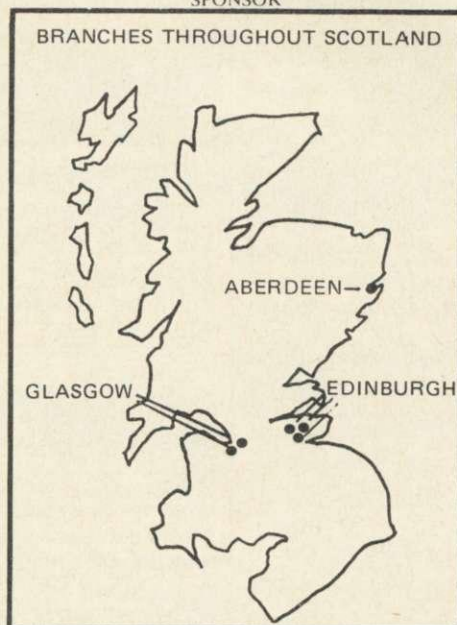

HOW TO ORDER: DEALERS.

ORDERS by post welcomed; please detach coupon and mail with payment.
Telephone orders welcome call 031-228 1111 or 031-228 1261.

We also welcome Government and Educational orders.
All products supplied include our own 12 months guarantee backed by our own service centre staffed by fully qualified engineers.
Order with confidence. 7 days money back guarantee.
All charges include VAT and carriage charges by courier. Dealer enquiries welcome.

Aberdeen

77 Holburn Street,
Aberdeen 0224 571735

Despatch Dept.
Constable House,
Hopetoun Street,
Edinburgh EH7 4NF
031-556 0191 x240

COMPUTERS

Acorn Electron Standard ALA01 with 5 Pack	129.00
Acorn Electron Yorkshire TV Pack	189.00
BBC Model B	339.00*
BBC Model B with DFS	469.00*
BBC Model B with DFS/MW 200 drive	559.00
Amstrad CPC 464 with Colour Monitor	339.00
Amstrad CPC 464 with Green Monitor	229.00
Apricot F1 with Free Yangyen Monitor	995.00
Apricot F1 with Free Yangyen Monitor	799.00
Sanyo DR101 Cassette Recorder	39.95
Acorn Electron Business Pack with view/view sheet	239.00

*with trade in

APRICOT F1 SOFTWARE

Sage Sales/Purchase/Nominal/Stock/Invoicing	425.00
As above but including Payroll	495.00
Dbase II	495.00
Wordstar	325.00

DISK DRIVES

Cumana CSX 100 40T single, no psu. (100k)	109.95
Cumana CSX 200 80T single, no psu. (200k)	149.95
Cumana CSX 400 80T single, no psu. (400k)	179.95
Cumana CS 100 40T single, with psu. (100k)	149.95
Cumana CS 200 80T single, with psu. (200k)	189.00
Cumana CS 400 80T single, with psu. (400k)	199.95
Cumana CD 200 40T dual with psu. (200k)	269.00
Cumana CD 400 80T dual with psu. (400k)	315.00
Cumana CD 400/S 40/80T switched, dual, psu. (400k)	355.00
Cumana CD 800/S 40/80T switched, dual, psu. (800k)	399.00
Disc interface kit, unfitted with DNFS ROM	89.00
Disc interface kit, fitted with DNFS ROM	117.00
Torch 280 disc pack, with perfect software and Z80 second processor	699.00
Pace 40/80 Track switchable 800k dual	only 299.00
AMS 3" Hitachi 100k	special offer 109.00
AMS 3" Hitachi dual 200k	special offer 199.00
Box 40 Track Parrot discs with plastic box	16.00
Box 80 Track Parrot discs with plastic box	25.95
Sony 3.5" Single sided discs	45.00
Sony 3.5" Double sided discs	58.00

(All disc drives supplied come with manual, format disc and all necessary cables etc.)

ROMS & SUNDRIES

AMX mouse superb plus software	89.95
Wordwise ROM	39.95
Wordwise plus ROM	52.00
View ROM	58.00
View sheet ROM	52.00
Disc Doctor ROM	33.95

BRANCH NETWORK

Glasgow

11 Bath Street
Glasgow 041 332 1116
415/419 Blythswood Court,
Anderston Cross Centre,
Glasgow 041 226 3011

Edinburgh

12 Leven Street,
Tollcross,
Edinburgh 031 228 1111
4 St. Andrew Square,
Edinburgh 031 557 2087

PRINTERS

Epson RX80 matrix dot	259.00
Epson RX80 F/T matrix dot	279.00
Epson FX80 matrix dot	379.00
Epson FX100 matrix dot	599.00
Epson LQ 1500 matrix dot	1250.00
Epson DX 100 Daisywheel	399.00
Epson DX100 Keyboard	189.00
Epson DX100 Sheet feeder	245.00
Epson Serial I/F with 2K buffer (8145)	69.00
Printer cable for any printer (1m)	15.00
Printer cable (1.5m)	17.50
MCP40 printer/plotter	119.95
Canon 1080A NLQ (80 Col)	319.00
Canon 1058A NLQ (132 Col)	449.00
Juki 6100 daisywheel 20 cps	only 369.00
Olivetti JP101 sparkjet	125.00
Seikosha GP700A	365.00
Brother EP44 typewriter/printer	239.00
Shinwa CTA cp80 100 cps	219.00
Canon PJ 1185A Colour Printer	499.00
Juki 6300 40 Chr Pr Second	799.00
Brother HR15 Daisywheel	399.00

SANYO PROF SERIES

Sanyo MBC 550 16 bit Micro single drive	599.00
Sanyo MBC 555 16 bit Micro dual drive	899.00
Sanyo Printer cable	18.00
Sanyo CRT 36 green monitor (above include Wordstar, Calcstar etc.)	125.00

MONITORS

Microvitec 1431/MS4 Standard colour	199.00
Microvitec 1451/MS4 Medium colour	269.00
Microvitec 1441/MS4 High	395.00
Microvitec 1431/AP/MS4 (PAL/AUDIO)	225.00
Sanyo NB colour only	169.00
Zenith 123 EA Green Monitor	79.95
Zenith 122 EA Amber Monitor	79.95
Cable CE 370A colour monitor only	149.00
Yangyen Swivel Green Monitor (F1 Compatible)	109.95
BMC High Resolution Green Monitor	110.00

Right is reserved to alter prices without prior notice.

MAIL ORDER

To: Microworld Distribution,
Dept. AU,
4 St. Andrew Square,
Edinburgh EH2 2DB

Please send me

I enclose a cheque for £.....
My credit card no is

Access/Visa/American Express (delete)

Name

Address

Tel. No.

SPECIALS

NEW USERS

NEW USERS

ATOM

ATOM

YELLOW PAGES


YELLOW PAGES

Editor *Tony Quinn* Technical editor *Bruce Smith* Sub-editor *Julie Carman*
Editorial assistant *Kitty Milne* Art editor *Nigel Wingrove* Publishing director

[illegible]

REVIEWS

Know Your Own Personality from Mirrorsoft/Ivan Berg, *The Sting* from Gemini, DACC's *747 Flight Simulator*, Addison-Wesley's *Electronic Colouring Book*, *Sinbad* from Virgin and *Pengi* from Visions – our reviewers tell you how good they are



RAM/ROM boards	167
Chris Drage compares seven expansion boards and helps	

REQUIREMENTS

REGULARS

© Redwood Publishing Ltd 1985. All rights reserved. No part of this publication may be reproduced without prior written permission of the publisher. The pub-

© Redwood Publishing Ltd 1985. All rights reserved. No part of this publication may be reproduced without prior written permission of the publisher. The publisher cannot accept any responsibility for claims or errors in articles, programs or advertisements published. The opinions expressed are those of the authors and do not necessarily represent those of the publisher. Acorn Computers Ltd or Acornsoft Ltd. Acorn, Acornsoft and the acorn symbol are the registered trademarks of Acorn Computers Ltd and Acornsoft Ltd. Typeset and printed in Great Britain by Watmoughs Ltd, Bradford. Print production by Aquarius Print and Design, London. Distributed to the news trade by Comag, Tavistock Rd, West Dravton, Middlesex UB7 7QE. Tel: (0895) 44405.

BUSINESS SPECIAL

APRIL

BUSINESS

● Business news 129

News about databases, software and books

● CP/M 133

To use the ABC business micros and other Z80 second processors to full advantage it's useful to understand how CP/M works—Edward Brown explains

● ZEP100 141

Is the ZEP100 second processor from Torch a worthy contender for your cash?

● Demon modem 159

● AMX Mouse 164

● RAM/ROM boards 167

Which way to expand? Chris Drage points you in the right direction

● Software for modems 176

Jeff Ashurst assesses six packages

Introduction to Logo—page 65

AMX Mouse review—page 164

Colours by interrupts—page 73

EDUCATION

Logo: The language for learning 65

Joe Telford brings you the background to this popular language in schools

Education news 151

Nick Evans: topics include *Microtext* licence fees, Acorn's *International Educational Software Catalogue*, and the success of the MEPs bar code reader

Software reviews 155

New for schools – *Answer Back* – *Senior Quiz*, *Vectors* and *Word Skill*

Acorn User
April 1985
Issue number 33

Cover illustration
by Carol Moss



FEATURES

Languages: Logo 65

The first article in our series on languages deals with Logo renowned for its use in teaching problem-solving skills

Colours by interrupts 73

Tristram Mabbs brings you high resolution, multi-colour graphics without eating up too much memory

Plotting equations 82

Impress your Maths teacher by plotting equations with Nigel Jennings' *Graph* program

DIY Icons 86

Brian Lienard presents his graphics editor

Measuring resistance 119

Use the ADC to measure electrical resistance with Paul Beverley

NEXT MONTH

Four Logos reviewed

Education software listing

Cartoons by computer

Chris Drage reviews alternative keyboards

CP/M corner: hints for Z80 users

Capital Test: checks for upper or lower case characters

Notes for authors

Acorn User welcomes submissions from readers. Articles should be typed, double-spaced text with diagrams and screen dumps on separate sheets, or on disc in *Wordwise* (saved as a 'SPOOL file using option 8) or *Viewformat*. Leave large margins to allow space for editing. Please enclose all programs on disc or cassette, with listings if possible. Also follow the style used in presenting listings in the yellow pages section. Photos should be 35mm, or larger, transparencies, or 5in by 7in

black and white prints. Ensure your name is on everything, and keep a copy. Enclose a suitable stamped, addressed envelope if the submission is to be returned. Attach a short letter with the article giving its title with a day time phone number if possible. Address your article to the Technical editor. Articles are acknowledged on receipt, but not submissions for the regular columns, letters pages and competitions. Please limit telephone enquiries to the Technical editor to Wednesday and Thursday afternoons.



AMX ART

AMX MOUSE

The AMX MOUSE is an advanced opto-mechanical device which brings to the B.B.C. micro facilities hitherto only available on more expensive machines. It enables you to use advanced features such as ICONS, WINDOWS, and POINTERS in your own programs.


The AMX MOUSE can be used with ordinary programs to replace the cursor keys and with the AMX software it turns the B.B.C. micro into a far more user-friendly device, enabling beginners to quickly learn to use the computer for a wide range of purposes, including COMPUTER AIDED DESIGN, Word Processing, and a host of business uses – to say nothing of its inclusion in games software.

A further range of software will be released in 1985. Starting with "DESK TOP MANAGER".

THE AMX MOUSE PACKAGE

The AMX MOUSE – an advanced three buttoned mouse which simply plugs into the B.B.C. user port drawing its power from the computer.

AMX ART GRAPHICS PROGRAM

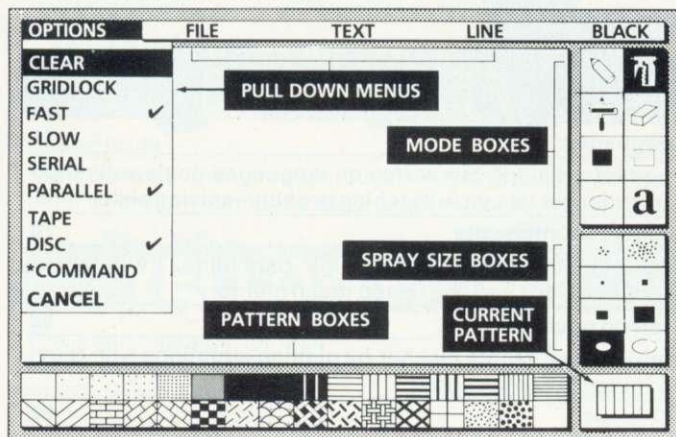

The AMX ROM – contains fast machine code routines for creating on screen windows, icons, and pointers and enables to MOUSE buttons to be programmed for use with commercial software such as Wordwise and VIEW.

Please send No. _____ **AMX MOUSE** package/s (including **AMX ART** and EPROM) at **£89.95** inc. VAT and P&P. I enclose a cheque/PO for £ _____ or debit my credit card.

Card No. _____ ☐ Visa ☐ Access

Name _____

Address _____

Signature _____ Date _____

(Please tick choice of media for AMX ART) ☐ Cassette ☐ 3" Disc ☐ 5 1/4" Disc

To: Advanced Memory Systems Ltd., Woodside Technology Centre, Green Lane, Appleton, Warrington, WA4 5NG, England.


If not available from one of our main dealers, fill in the coupon and we will send you an AMX MOUSE with AMX ART with our full no quibble money back guarantee. OR phone 0925 602690/62907 for instant Access or Visa orders.

A MANUAL describes how to operate the MOUSE and the ROM routines which are available in both basic and machine code programs.

AMX ART – a superb computer aided drawing program on both tape cassette and a 5 1/4" floppy disc with its own manual. It is suitable for a wide range of uses including preparation of illustrations, architectural and engineering detail drawings, teachers' worksheets, and just creating your own pictures. It soon becomes addictive.

AMX ART includes full use of on screen menu boxes, icons, and pull down menus so that beginners find it very easy to learn and gain confidence in the use of the B.B.C. Micro.

An ICON DESIGNER program which enables you to create and store icons for use in your own programs.

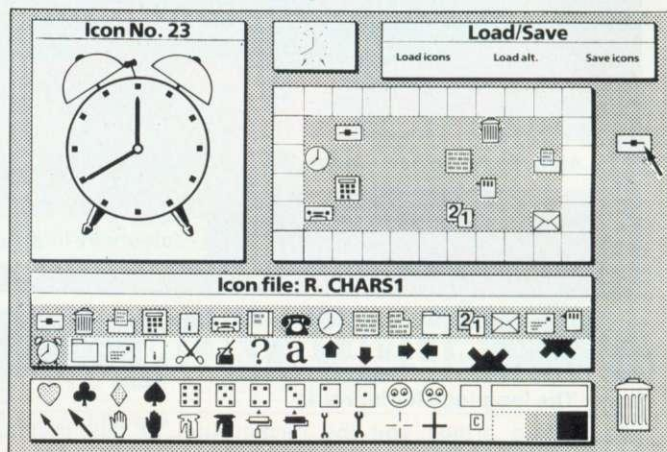

TECHNICAL REQUIREMENTS

The AMX MOUSE can be used with any B.B.C. Model B computer fitted with the Operation System 1.2 and is compatible with the second processor and disc or tape filing systems.

The AMX MOUSE is adjustable for sensitivity via software control and three buttons can be programmed to simulate 24 different key codes.

The AMX MOUSE may be disabled by a simple software command and will then not interfere with normal operation of the computer.

The AMX ART programme enables users to print out screen displays using any Epsom compatible dot-matrix printer. Owners of non-standard printers may use their own screen dump routines.

*Wordwise' is a wordprocessing program by Computer Concepts.


*View' is a word processing program by Acornsoft Ltd.

ICON DESIGN PROGRAM


AMX MOUSE

POINTS THE WAY

**FOR THE
BBC MICRO
MODEL B**

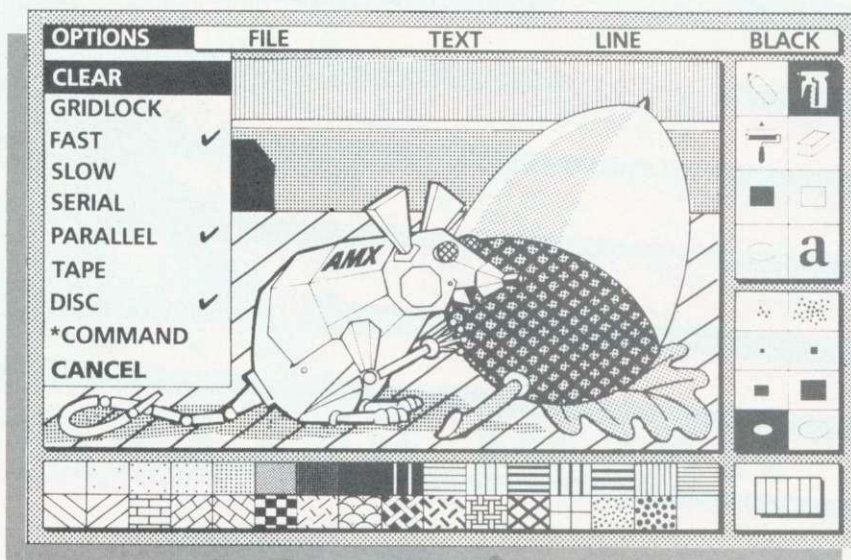

with AMX ART GRAPHICS PROGRAM

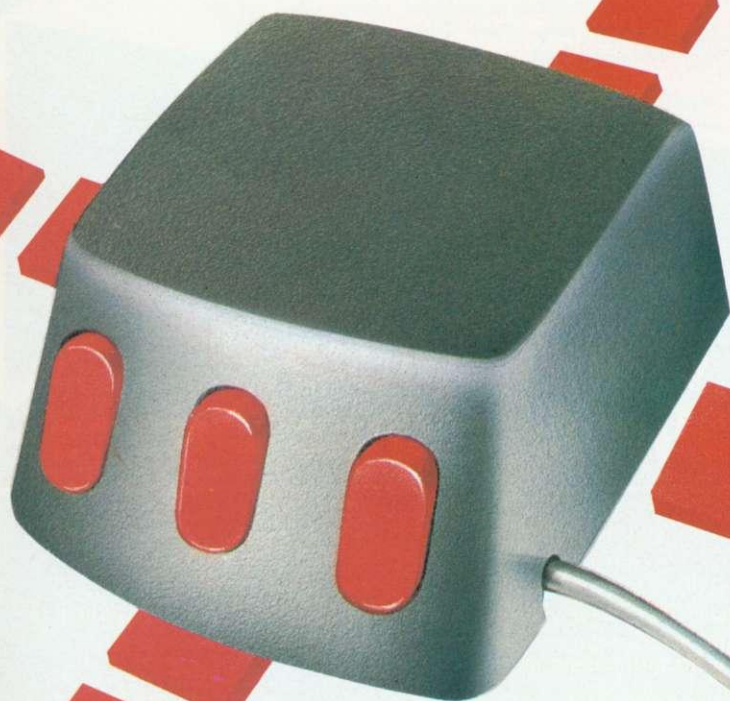

ICON SOFTWARE

CREATIVE GRAPHICS

FASTER INTERACTION

£89.95
inc. VAT and P & P



MD 400
£155.65
+ VAT= £179

MD 800
£312.17
+ VAT= £359

MD 800P
£373.04
+ VAT= £422

BBC Compatible Mitsubishi Slimline Disc Drives

These are high capacity, precision drives with dynamic clamping and very low power consumption. All drives are supplied with cables, a very comprehensive utility/format disc and a manual.

MD 400 — 400K (800K double density) 40/80 track switchable double sided single drive.

MD 800 — 800K (1600K double density) independently 40/80 track switchable double sided dual drive.

MD 800P — 800K (1600K double density) independently 40/80 track switchable double sided dual drive unit with built-in power supply and monitor stand.

Opening Hours: Mon-Fri 9am-6.30pm
Sat 10am-5pm (ample parking)
We accept telephone orders on Barclay
and Access Cards.

Mail Order: Cheques or bankers draft
payable to Akhter Instruments.
Delivery free of charge (UK only)



COMPUTER GROUP

28/29 BURNT MILL, HARLOW, ESSEX CM20 2HU UK.
TEL. HARLOW (0279) 443521 TELEX 818894 AKHTER G

Dealer Enquiries
Welcome

SUNDAY 10 FEBRUARY 1985

From little Acorn—a crisis grows

Acorn replaces financial advisers

BY JASON CRISP

ACORN COMPUTERS, the troubled home computer company which makes the BBC micro, has replaced its financial advisers.



Acorn goes to ground

Acorn's star fades

Why the man who punched

Acorn drops distributors in efficiency move

Olivetti sort out Acorn

AT 2.30 in the morning of February 20, Hermann Hauser and Chris Curry, the two founders of Acorn, signed away their controlling interest to the Italian company Olivetti.

This combination—Acorn's strength in research and education with Olivetti's business and international markets—is seen as a potent combination.

Now the industry will look to Sinclair, which is not without problems, and Amstrad, as the two other large producers of micros in the UK for an indication of the state of the market.

Olivetti's stake will cost about £12 million, three-quarters of which will be used to allow for the reduction of value in stock caused by price-cutting, and losses in the USA and Germany. Acorn has announced that its total losses for the six months to January will be £11m.

This agreement will be put to Acorn shareholders at an extraordinary general meeting in the next month.

Olivetti, which is showing a series of TV adverts based on the Mr Men characters, will have a 49.3 per cent share in Acorn with the right to increase this to 50.1 per cent. Hauser and Curry's share will be cut from 87 to 36 per cent.

The whole structure of the company is being revised, and a new board appointed. A total of 120 people will be made redundant.

It appears Olivetti will support Acorn in going for education contracts in Europe, but—contrary to some reports

—Acorn is not pulling out of home computers. Development plans for the BBC system look safe and Electron production is continuing.

Elserino Piol of Olivetti stressed Acorn's 'outstanding technical expertise' and 'well established position' in the educational market. A joint statement by the companies added that Acorn will have

access to Olivetti's international marketing to create 'a major drive in the world's education markets'.

There will be four new divisions within Acorn: education and training, scientific and industrial, business, and consumer. However, the emphasis will be on the former to reduce Acorn's dependence on the 'volatile home com-

puter market'.

Four present managers have been appointed heads of these sections. Hauser and Curry will become deputy chairmen and the present acting chief executive Alex Reid will become chairman. Two other directors will be placed by Olivetti, and a managing director brought in.

Beeb safe, but ABCs under review

THE BBC has said it is 'extremely satisfied' with the Olivetti deal and expects no change in the contract with Acorn.

But speculation continues over the future of the Electron and ABC business micros.

With 100,000 Electrons unsold, and the amount of components in stock, Acorn will undoubtedly have to pull out all the marketing stops available. The fear is that by next Christmas the Electron will be outdated and too expensive.

Production of the ABCs is reported to have stopped and Olivetti will no doubt hold back release of the range until a strategy of dovetailing it into its own products is established.

However, the Communicator looks safe. Its accent on communications with built-in software and small size for under £1000 has already been established with the OPD from ICL.

As a 'cheap version' of the

BBC micro, the Electron has had an unhappy history. Although well received in 1983, it missed the Christmas rush and Acorn's decision to keep the price at £200 against opposition like the Amstrad and Spectrum in the Autumn of

84 must be seen as a mistake in retrospect.

AB Electronics is still building Electrons. Chairman Henry Kroch explained production was at a 'very low rate', mainly because of the stocks.

What caused the big crash?

BEHIND all the figures lies the fact that Acorn simply ran out of money. The company spent £4m on advertising to sell 300,000 computers over Christmas and only sold two-thirds of that figure. And that's a lot of computers not to sell—hence the £70 reduction in price on the Electron.

The company might have ridden out the storm but for losses in the US and unfavourable Press and market reports which undermined its credibility. Creditors got itchy, and all it took was for a few to ask for the money owed them and the bubble had burst.

One of the companies starting ABC assembly pulled out, as did another on the BBC side. However, Acorn has had close co-operation from its biggest manufacturer, AB Electronics, which assembles BBC micros and Electrons in Wales.


This company's shares were riding high through the troubles, despite Acorn accounting for a large part of their business.

Details of Acorn's restructuring have yet to be announced, but 120 staff are to go—a quarter of the total workforce.

DATA STAR QUALITY

At down to earth prices.

When it comes to printers, whichever way you look at it, we've got the lowest prices, the widest range and the best back-up service in the country. What you won't get from us, are special gifts, or false promises — just honest value and a fully guaranteed after-sales service.

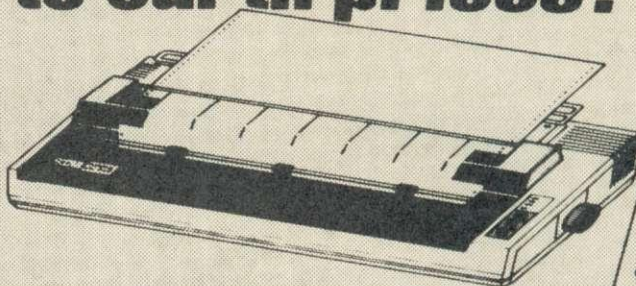

SPECIAL OFFERS

Brother — M1009 £173.86 + VAT = £199.95
50cps ● bi-directional ● logic seeking ● 96 chars plus international and graphics ● 9 x 9 matrix.

Gemini 10X £189.95 + VAT = £218.44
120 cps. ● bi-directional ● logic seeking ● friction, tractor and roll holder standard ● down loadable characters ● ultra high resolution ● 80 cols. ● IBM PC version available.

Kaga-Taxan KP 810 £257.00 + VAT = £295.55
Near letter quality ● 160 cps ● bi-directional ● 96 chars. plus graphics ● 5.print sizes ● 9 x 9 matrix.

COMPLETE RANGE

DOT MATRIX

Cosmos JP 80 £169.95 + VAT = £195.44

Epson RX80 £198.95 + VAT = £228.79

Epson RX80 F/T £228.95 + VAT = £263.29

Epson FX80 £319.95 + VAT = £367.94

Epson FX100 £498.95 + VAT = £573.79

Star Gemini 10x £189.95 + VAT = £218.44

Star Delta 10 £319.95 + VAT = £367.94

Star Radix 10 £498.95 + VAT = £573.79

THERMAL MATRIX PRINTERS

Brother HR5 Ring for prices

Brother EP44 Ring for prices

DAISYWHEEL PRINTERS


Brother HR15 Ring for prices

Juki 6100 £325 + VAT = £373.75

Cables ● Paper ● Ribbons ● Sheet and tractor feeders ● Interfaces

If you have any technical queries or want our latest prices please telephone:

Credit card hot line... 01-482 1711

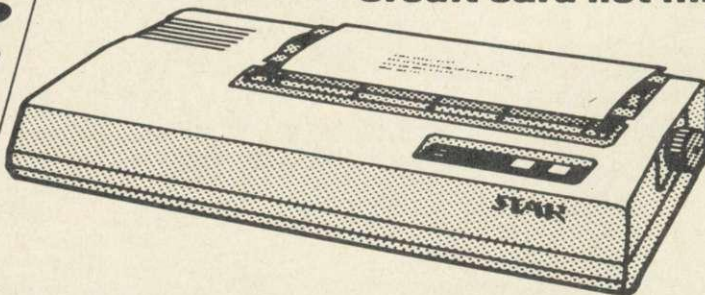


Please add £10 for delivery, we guarantee 48 hour delivery from payment. Personal callers welcome. We're at the junction of Camden Road, near the railway bridge. Anytime 9.00am to 6.00pm Monday to Friday 10.00am to 1.00pm Sunday. Export and dealer enquiries welcome. Post your order with cheque to

© Certain Advertising Ltd 01-930 1612

Datastar Systems UK

Unicom House, 182 Royal College Street, London NW1 9NN
Telex 295 931 Unicom G Telephone 01-482 1711

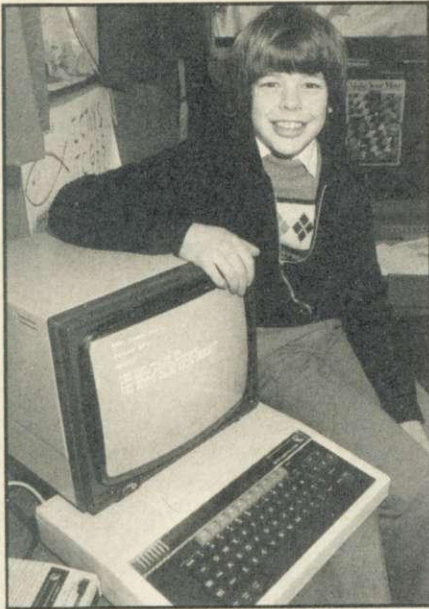

David won BBC system

David Essex in the limelight after victory in chess contest

More than 6000 primary schools entered Britain's first chess championship on computer played through the BBC's Ceefax system using Acorn's Teletext adapter.

The winner was David Essex from Scamblesby School in Lincolnshire, who beat Cathy Haslinger from Hayes Park School in Middlesex. David was the British under-nine champion (he's now ten), and number one seed for the competition.

Both finalists win Acorn equipment. Cathy gets a BBC micro for her school, and David a BBC plus peripherals.

More recently, Monster Y, a chess computer, was defeated in the Commonwealth Championship in London. It got through the first round, but was beaten in its second match by international master Daniel King after a five-hour battle.

At least these contests didn't have the problems of recent world matches between the Russians where the contestants were hiring 'parapsychologists' to stare each other out, and pulling each other's chairs apart in the search for illegal equipment!

THE MAN FROM



Our new columnist takes a sideways look at the news...

Uncle Clive certainly put the cat among the pigeons when he slashed the price of the Spectrum+ (you'll be glad to know the keys don't fall off now, thanks to a new adhesive distilled from the hooves of only the finest horses. Hi-tech really pays off.)

The new price-cutting is like the outbreak of World War 3. One practice missile rashly fired and suddenly we're all in the bunkers blaming each other.

Electron price down to £129 (95p cheaper than the Spectrum!). Commodore Plus 4 halved to £149. Apple attacks the education market, offering a 50 per cent discount to schools. It's possible even the Macintosh may come within the scope of the scheme. Where will it all end?

You never know, Acorn might even reduce the price of their chip-in-a-box, the 6502 second processor. After all, it's got an even worse keyboard than the Spectrum and I can't find any socket to plug my cassette deck or anything else into.

Anyway, to happier things. Have you seen any of the extremely cheap Firebird games from BT? I've got two - *Hacker*, a sort of *Felix in the Factory*, and *Duck* all about shooting poor little ducks. The games themselves are pretty good, but what I really like is the music that plays as they load.

Hacker has 'Blaze Away' and *Duck* has 'La Belle Helene'. I know it should be the other way round, but there you are. Melvyn Wright who wrote *Duck*, did the music for both of them, so you'd think they would have given him first choice. Maybe they did.

If you have musical ambitions for the Beeb, listen to them and find out how it should be done.

I've put the musical bits onto disc to play them when I want. Since they're interrupt-driven I can listen to them while I'm pounding my finger on the keyboard doing something else. I hope that's not illegal.

Torch in Belgrano feud

Micros seem to be getting in on the act everywhere. Latest front page story with a micro angle was the bitter exchanges between Prime Minister Margaret Thatcher and Labour leader Neil Kinnock over the trial of civil servant Clive Ponting who leaked information on the sinking of the Argentinian warship General Belgrano.

'The letters were probably written on Torches,' said a Torch spokesman.

Neil Kinnock has a C series Torch with hard disc in his House of Commons office. Mrs Thatcher has gone one better. She has a network of C series Torches up and running in the Cabinet Office at Number 10.

(Readers may remember our Diary piece about Neil Kinnock's system in last July's issue, where a word-processed Press release went out with the last paragraph missing!)

'It is probably the only thing they have in common,' said the Torch man.

The battling politicians could have made their exchanges of letters even more rapid were they to use Torch's MailPlus electronic mail software. The only problem is, what would the papers and TV have used in place of the photos of the 'Dear Mr Kinnock' and 'Dear Prime Minister'?



Kinnock and Thatcher: to war with a Torch

Battle against piracy

FAST, the Federation Against Software Theft, is to increase its fight against program piracy by a publicity campaign with posters and badges distributed through the group's members.

The Federation represents the interests of the software companies in trying to stamp out piracy, particularly of games. The group is sponsoring the Copyright (Computer Software) Amendment Bill at present going through Parliament.

This Bill is being backed by

Conservative MP William Powell, and seeks to outlaw illegal copying of programs with heavy penalties for offences - unlimited fines and up to two years in prison.

It follows similar action taken in 1982 to amend the 1956 Copyright Act to take into account video tapes. This was pushed through very quickly and virtually stopped the film pirates overnight.

For more information contact FAST at Chancery House, Chancery Lane, London WC2A 1QU.

The **XLtron** MEGA•BOX



Measures 6 1/4" x 8 3/4" x 6 1/2"



The original and still the leader in value.

Prices guaranteed until 28th March 1985

THE midi•box

15 DS/DD disks in our **midi•box** at a bargain price. Our new **midi•box** has some great features. It's made of high impact plastic and holds up to 30 5 1/4" disks, but is one of the neatest on the market. Measuring only 6" x 6" x 3", the rigid lid conveniently holds the disks you are working on ready to hand. And with 15 DS/DD disks its a bargain at only £20 plus £3 VAT and £2 p&p = £25.

Atari owners ring for 'flippies' prices

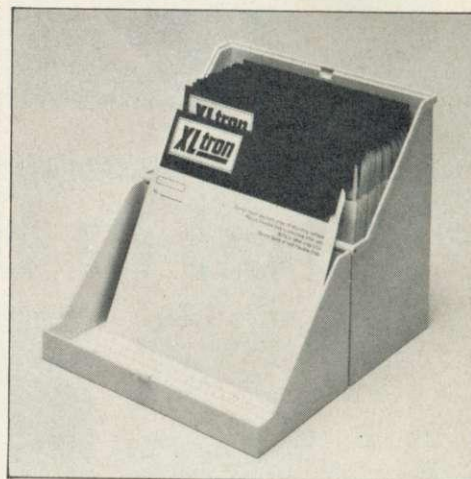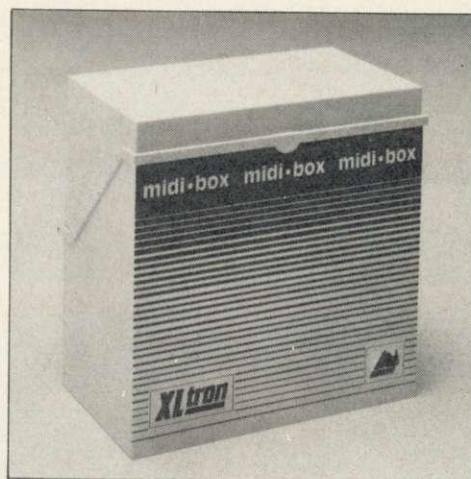

SUPERDISK

Suitable for any user, any computer, any format. Single sided, double sided, 48 or 96 tpi. Individually tested.



10 in a **mini•box** £19 plus VAT £2.85 and £2 p&p = £23.85

15 in a **midi•box** £25 plus VAT £3.75 and £2 p&p = £30.75

25 in a **MEGA•BOX** £42 plus VAT £6.30 and £2 p&p = £50.30

50 in a **MEGA•BOX** £80 plus VAT £12 and £2 p&p = £94.00

Disco•Tech (U.K.) Ltd.,
Lex House, 3-6 Alfred Place,
London WC1, England.

Disco•Tech (U.K.) LTD. are the sole distributors of XLTRON.

XLtron Floppy Disk Prices

All disks are 5 1/4", 48tpi, featuring write protect notch, centre hubs, double and single density, Tyvex sleeves and full set of labels.

25 SS/DD disks in **MEGA•BOX** £29 plus VAT £4.35 and £2 p&p = **£35.35**

25 DS/DD disks in **MEGA•BOX** £39 plus VAT £5.85 and £2 p&p = **£46.85**

50 SS/DD disks in **MEGA•BOX** £50 plus VAT £7.50 and £2 p&p = **£59.50**

50 DS/DD disks in MEGA•BOX £70 plus VAT £10.50 and £2 p&p = £82.50

10 SS/DD disks in **mini•box** £13 plus VAT £1.95 and £2 p&p = **£16.95**

10 DS/DD disks in **mini•box** £18 plus VAT £2.70 and £2 p&p = **£22.70**

***£5 PRICE REDUCTION**

The MEGA BOX is a top quality rigid plastic storage box with see-through lid and four dividers. Holds up to 60 diskettes.

Suitable For Popular Micros

XLTRON disks are recommended for BBC, Atari and Commodore computers. If you need advice on other micros just ring 01.631 0255

Our Quality Promise

You can order with confidence. We buy disks from international manufacturers to our specifications, then test, retest and grade them in our London laboratories.

Fully Guaranteed

The XLTRON quality control is so stringent that we can give our famous 'two for one' guarantee. If you find a faulty disk, return it to us, and we'll send you two in exchange immediately. All part of our five year guarantee.

© TYVEX is a registered name of Du Pont.
© RHINOKOTE is a registered name of Disco Technology Ltd.
© XLTRON is a registered name of Disco Technology Limited.

Personal Callers Very Welcome

We're now established in our new showroom in Alfred Place. You can save our £2 delivery charge by calling in - you'll be welcome weekdays from 10.00am till 5.00pm Saturday 10.00am-4.00pm.

Help Lines

Technical: 01-631 0255

Sales: 01-631 3600

If you want help or information to place an order just ring our 'help' lines.

Official Orders

We accept orders from all government bodies, schools, universities, libraries, armed forces etc. We despatch on receipt of an official purchase order. If you can't raise a cheque without an invoice, just post or telephone your order and we'll send you a pro-forma by return.

To: Disco•Tech (U.K.) Ltd., Lex House, 3-6 Alfred Place, London WC1, England

Just fill in the coupon or send your order on a postcard or letter. Or phone your order on 01.631 3600

Please send me the following, (tick the appropriate boxes):

_____ (QTY) ☐ SS/DD ☐ DS/DD ☐ SUPERDISK disks in a

☐ **MEGA•BOX** ☐ **midi•box** ☐ **mini•box**

I enclose a cheque/p.o. for £_____ or debit my Access/Diners/Amex card

card no. _____

Name: _____

Signature: _____

Address: _____

Postcode: _____

(Block Capitals Please)

DIY viewdata from Communitel

COMMUNITEL claims its viewdata and electronic publishing system is cheaper than the alternatives offered by Prestel and the Times Network.

Communitel enables users to set up a Prestel-like database on BBC micros for in-house use or as an information service for others to dial in to. Unlike the others, it relies on the users to provide information and organise it. However, it does give access to these services.

For £45, the company offers viewdata software, which can be upgraded to run the full communications set-up. For £325, Communitel offers viewdata software and auto-answer modem.

Contact Communitel at 189 Freston Rd, London W10 6TH.

Career facts

STUDENTS about to leave school and embark on a career can get facts from a series of discs on areas such as teaching, finance, broking and insurance.

In all there are eight titles, with another five planned. Each disc costs £11.44 (40 or 80 track), with cassettes at £10.29 each.

The publisher, Careerdata, is at Yeoman House, 76 St James Lane, London N10 3RD.

Micro winner

THE winner of the BBC micro on offer at the High Technology and Computers in Education Exhibition at the Barbican in January was M Smith of Norwich.

Inform register

USERS of Inform, the £15 database from Nottingham Computer Education Centre, are being asked to provide information of their data to help set up a central register.

Contact the centre at Eaton Hall, Retford, Notts DN22 0PR.



British Thornton's CAD system at the recent Design and Technology exhibition in London's Wembley Centre

BBC system for CAD users

SCHOOLS, architects and small businesses can give their Beeb designer power with a CAD system from British Thornton, called Compass. The package contains a 2D shape generator which allows 3D viewing and modification. Designs may be viewed in any one of seven projections.

Package prices for digitiser, plotter and software start at £3,664 + VAT. Contact British Thornton on 061-998 1311.

ROM books for the Beeb

THE flow of books continues unabated. Among the latest releases is something for everyone.

One book not to be without is the *BBC Micro ROM Book* by Acorn User's own Bruce Smith. It tells you everything you ever wanted to know about sideways ROMs and RAMs including how to write your own sideways firmware. Published by Collins, it costs £9.95.

Also on the ROM front is the *Wordwise Applications Guide* from T Roberts, Lamora, The Street, Bunwell, Norfolk, price £7 including postage. Written by Paul Beverley, another AU writer, it is the accumulated wisdom of a dedicated *Wordwise* user.

Other utilities books include two new titles from Century. *Epson Printer User's Handbook* is self explanatory. Written by Weber Systems it costs £9.95. *Maths Tutor* for the BBC/Electron by Robert Carter costs £7.95 and is a comprehensive treatment of the subject including differentiation and integration.


For puzzlers and mystery addicts there is *Micro-computer Puzzles* (Collins, £6.95) by Garry Marshall. It is a

collection of brainteasers which first appeared in the *Observer* magazine. Background information and various techniques are set out to help you solve the puzzles.

Alternatively, two new solve-it-yourself computer mysteries have been published by Armada at £1.25 each. Entitled *The Bytes Brothers Record a Robbery* and *The Bytes Brothers Go to a Getaway*, they are the usual formula of five short stories containing within the text short computer programs that will help you to solve the mysteries.

The Secret of Arendarvon Castle (Addison-Wesley, £5.95) will involve considerably more typing. The book contains the listing for a lengthy adventure. The rest of the book includes maps, diagrams, illustrations and a wealth of information that will help you survive the ordeal.

If writing adventures is more to your taste, take a look at A Bradbury's *Adventure Games for the BBC Micro* (Collins, price £6.95). And for the wargamer there is *BBC Micro Wargaming* by Owen and Audrey Bishop (Collins, £8.95).

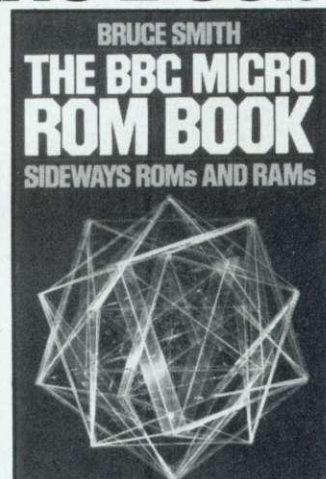

Electron owners wanting to sharpen up their programming skills should take a look at *Programming the Electron* (Newnes) and *Getting the Most From Your Acorn Electron* (Penguin, price £6.95).

Telecommunications in Practice (British Telecom at £5) is aimed at educationalists. The full ins-and-outs of British Telecom and telecommunications are covered in what the BT chairman describes as the 'standard work of reference in science classrooms throughout the country'.



"Nice program, shame about the screen shots"

If you need THE best quality copy for promotion of your software, contact PAUL WYNDER now for further details:

0280 812037

**DIMENSION
GRAPHICS Ltd
Main Street
Chackmore
Buckingham
MK18 5JF**



A chip off

The chip, of course, is the 8088 as used in the IBM[®] PC. The operating system is customised to MS[™]-DOS compatibility. The user memory is 256K RAM, that's four times as much as big brother. The floppy disc storage is 720 Kbytes, that's more than



double the basic PC. We've only got two expansion slots, but there again we use them for expansion and don't need to tie them up with basics such as colour graphics or printer ports.

We are disc compatible to Lotus 1-2-3 and most other popular business

software. And hardware compatible, accepting auto-dial/auto-answer internally housed modems, networking and memory expansion cards, plotters and just about any board level product developed for the IBM[®] PC.

And at under £1200, including VAT and a suite of

f the old block.

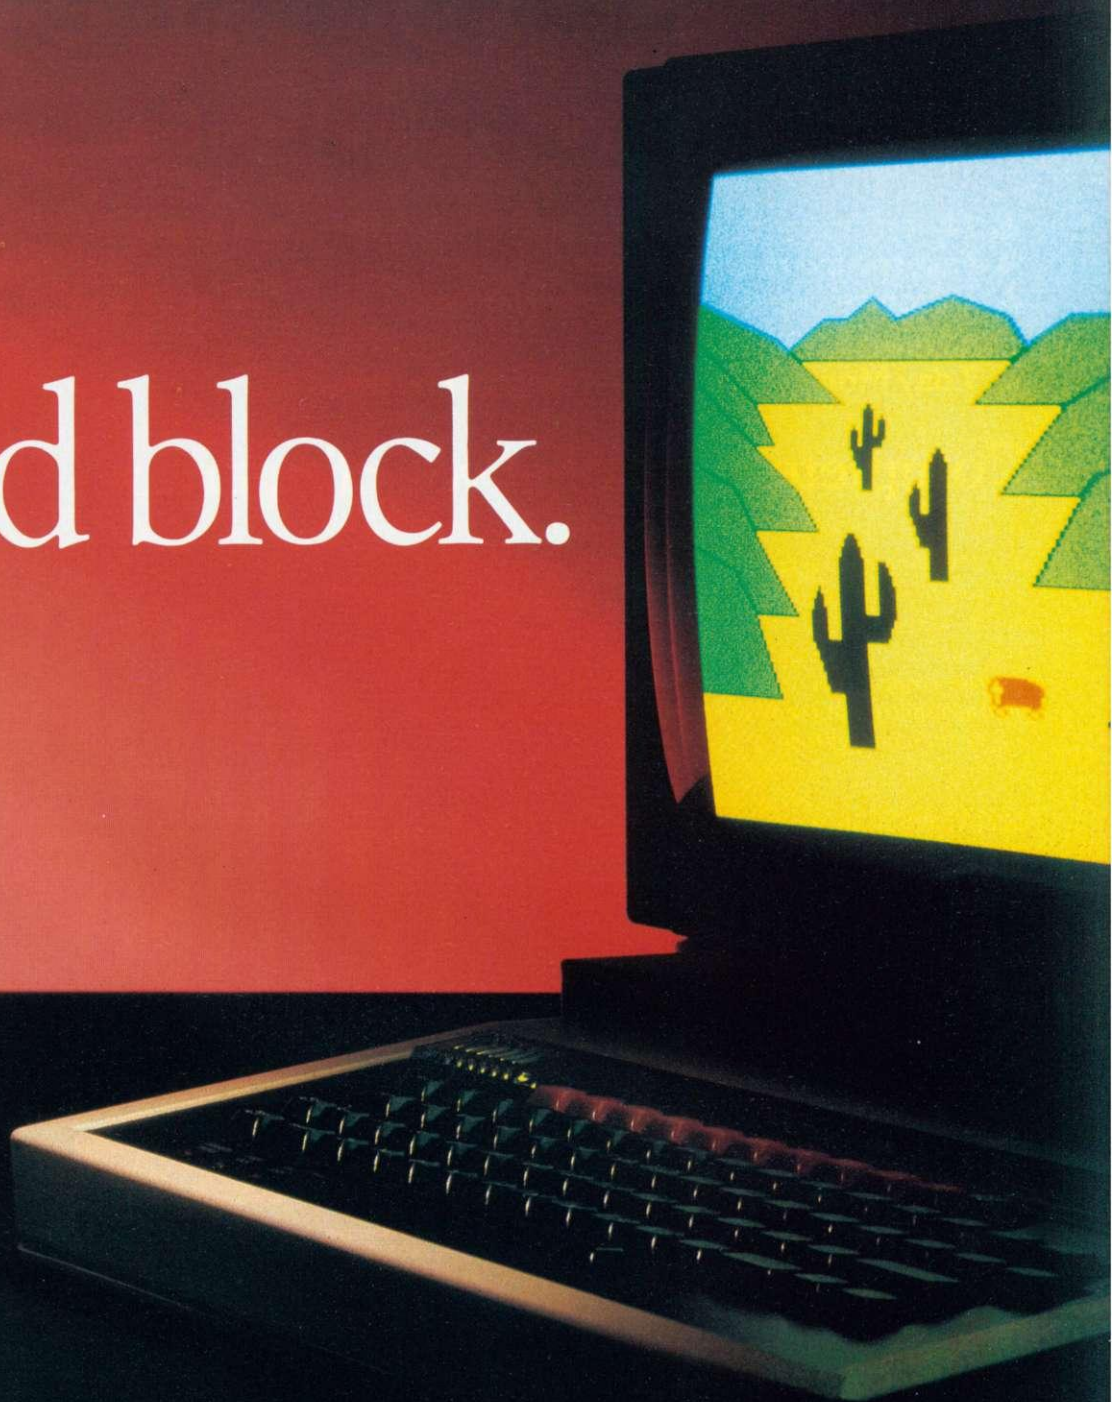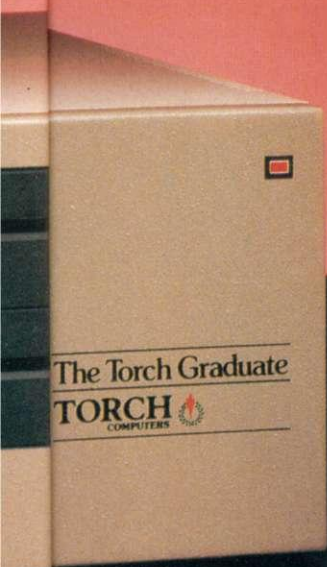

PSION XCHANGE business software to get you started, we're less than half the price.

Isn't it a shame we're only available to BBC Model B Micro owners.

Torch Computers, dedicated to the BBC Micro in more ways than one.

For the name of your local Torch Graduate dealer complete the reader enquiry card or ring (0223) 841000.

Torch Computers Ltd., Abberley House, Great Shelford, Cambridge CB2 5LQ.

Torch Graduate
TORCH
COMPUTERS

Technical Specification • 8088 16-bit CPU (5Mhz) • 256K RAM • MSTM-DOS operating system customised to IBM PC compatibility • Twin double sided, 5 1/4" floppy disc drives (each 360K formatted) • 2 IBM PC compatible expansion slots • Free PSION XCHANGE software (Abacus, Easel, Archive, Quill) • Software compatibility allows Lotus 1-2-3 and popular IBM PC business programs to run without modification, subject to constraints of BBC keyboard and display • Acorn Disc interface is not required • Keyboard, text and graphics by BBC Model B Micro.

Increase your fire power!

More than just a joystick—a system

- ▲ Nylon encased—Steel shafted joystick with ball and socket joint.
- ▲ Fast sprung return to centre.
- ▲ Graphite wiper linear potentiometers.
- ▲ 12 Months Guarantee.
- ▲ 7 day Money back Guarantee (on Hardware).

Complete control at your fingertips

A superb joystick and a keypad for the price of either one. Plus the software to integrate it into the computer's system. One handset will work on it's own in the A/D port as a joystick and two fire buttons. Joystick is immediately compatible with ACORNSOFT and similar software.

The interface joins together the analogue and the user ports to use the full keypads giving a total of 24 user definable keys. The interface can also be used as a splitter for the A/D port to take two items at the same time, e.g. joystick and lightpen.

DELTA DRIVER on cassette or disc: Two programs on each cassette or disc. One converts machine code programs from the keyboard to the joystick or keypad, with adjustable sensitivity on the joystick and will run on any O.S. The second program (needs O.S. 1.0 or later and an interface) duplicates any keyboard keys on the keypads, in the operating system, so that it can become a numeric keypad or will take on the function keys.



Numerous stockists nationwide or direct from us.

SAE for more detailed information.



Made in England

DELTA 14b HANDSET £14.95
DELTA 14b/1 A/D/USER PORT INTERFACE £14.85
DELTA DRIVER CASSETTE £5.95 or DISC £9.95
Prices include VAT and P&P.

Voltmace *delta 14b*

Callers welcome at the factory — Monday to Friday.

VOLTMACE LTD
PARK DRIVE
BALDOCK
HERTS
SG7 6EV
Tel: (0462) 894410



Lords warning to schools

BRITAIN appears to be doing pretty well with its classroom computer programme... lots of micros, mainly Beebs, have certainly flooded into almost every school. Millions of youngsters are turning hands-on experience into high flying expertise, making the mysterious micro a familiar friend.

Unquestionably, the one-time wonder has become the most popular plaything of our times. If today's school kids are not tapping in programs they're zapping the software.

It looks impressive. But is it really going to make it easier for Britain to face up to the challenge of computers? Or are we missing the real chances of facing the industrial future... and winning?

According to at least one influential source, despite all these micros there are still some basic attitudes which need changing if we are to measure up to future needs and competition from the USA, Japan and the rest of Europe.

The warning has come from the Lords Select Committee on Science and Technology which has been looking at education and training for new technologies.

Its conclusions - technologi-

Acorn's Chris Curry and other experts on micros and education last year gave their views on Britain's progress in teaching about, and with, computers to a House of Lords committee. We summarised Curry's opinions last September where he expressed concern about teacher training. Here, Bill Penfold outlines the results of their Lordship's inquiry.

cal progress is being held back by a national failure to educate and train people of the right quality and in the right quantities. And the problems start in primary school.

The peers came up with some tough criticisms of Britain's track record, and even more worrying, the prospects for the future.

But what about that warm glow we've managed to kindle over the success in putting classroom computers into almost every school in the country, the vast majority of them Beebs?

Like many other school reports, the Select Committee, headed by Lord Gregson, concluded: 'Has made progress... but could do better.'

The kind of progress they want to see are new schemes developing the use of computers across the school curriculum. In particular, the committee felt a need to put more attention on the retraining of teachers, and that increasingly vexed subject of educational software.

The headache that software houses face when producing educational programs was graphically spelt out to the committee during its investigations by Acorn boss Chris Curry. You may recall his comment to their Lordships that schools were a den of thieves (AU, September 1984).

Whatever the problems though, the committee suggested that the departments of education in England, Scotland, Northern Ireland and Wales should get a grip on ensuring more suitable software is available.

What also worried the peers was - what happens next? The Micros in Schools scheme was generally reckoned to be a success, as was the Micro-electronics in Education Programme. But both are due to end by 1986.

As their Lordships point out: 'The physical installation of

the equipment is only half, or less, of the battle.' The real issue is that once installed the computers should be properly and fully exploited - right across the curriculum.

This is where the need for more software is abundantly clear... and the need for more teachers to be trained to use computers in their teaching.

The dangers of staffing schools with teachers who feel 'uneasy' with the new technology is one of the points brought out by the new report: 'Primary school teachers who feel insecure in science pass on their insecurity.'

There was a lot of criticism in the report too about the short-sighted attitude to funding. The trouble, say the Lords, is that education and training budgets remain the most likely to be cut when money is tight.

On top of that, the peers once again spotlight the difficulties faced by girls in general compared to boys when it comes to computer education.

So the education departments have been told in straightforward terms that they should be doing more to help local education authorities to get their acts together.

Design your own arcade game

MAGIC Mushrooms is the latest title from Acornsoft. It's a platform game like *Killer Gorilla*, but the difference is that you can create, save and play your own screens.

This is done by taking the various elements - ladders, slides, ice, trampolines, etc, and putting together a screen where the aim is to get from start to finish, collecting the magic mushrooms on the way, without getting killed in the process.

So players can make up screens to pass around and test their friends.

The game comes with nine sample screens, most written by Acornsoft staff.

Five were created by Neil Raine, author of *Planetoid* and *Meteors*. Others are by Tim Dobson, author of *Maze*, Alan Bellingham and David Johnson-Davies, boss of the

company. The starter screen was written by the author of *Magic Mushrooms*, Richard Clay.

There is only one way to solve some of the problems, as in some screens there are traps which you just can't get out of.

Release date was set for March 1, and the game costs £12.95.

BBC pictures on video

INTERACTIVE video systems can be built up using an interface board that enables computer-generated text and graphics to be laid over standard TV pictures produced by a video disc player.

Abbey Audio, its makers, says the board sits between the disc player and RGB output

of the BBC micro. To work, the BBC must be adapted to display TV pictures by using a 'genlock' system, which Abbey also makes.

The video board fits inside the BBC, and measures 4in by 3in. For details contact Abbey Audio, PO Box 2, Staines, Middlesex.

Timetable for computer festival

THE London Festival of Computing kicks off on April 9 with a four-day extravaganza of competitions, games and exhibitions at Covent Garden.

Robots will be put through their paces and InterAction will be running fun things for kids among other things. See timetable above.

Tuesday 9. Official opening and Personal robotics, Covent Garden.
Wednesday 10. Community computing, Covent Garden.
Thursday 11. ITEC exhibition, Covent Garden.
Friday 12. NetReach and communications exhibition, Covent Garden.
Friday 12. Opening of Islington ITEC by Clive Jenkins.
Friday 12 & Saturday 13. Choosing Computers, GLC County Hall.
Friday 12, Saturday 13. Logo Spectacular, London Docklands and LNTN, Camden Town (Richard Olney 01-267 0642).
Monday 15 to Saturday 20. Disability Work Experience, residential pilot camp, Tara Hotel, Kensington.
Tuesday 16. London Decision Makers Conference, Euston Road.
Thursday 18. Competition & Computers on the Stock Exchange, 6pm, Charing Cross Hotel.
Thursday 18 to Saturday 20. London Computer Fair, Central Hall, Westminster.

PRICE BREAKTHROUGH ACORN


OFFERS AVAILABLE ONLY WHILE STOCKS LAST



**EX43
SILVER REED
ELECTRONIC TYPEWRITER**
Was £279.95
Now **£160.00**
incl. VAT

LOWEST
PRICE IN
THE U.K.!

Offered at this price you could be excused for questioning the quality – DON'T! – brand new and fully guaranteed, this smart compact unit combines all the advanced electronic features, to produce beautiful print quality. Supplied complete with interchangeable type wheel, you will not be able to beat the price and quality anywhere. Supplied complete with parallel or serial interface, to convert into a computer printer £249.95 including VAT.



**GRAPHICS
TABLET**
Was £149.95
Now **£59.95**
incl. VAT

A remarkable graphics tablet – ideal for use in education, business, drawing offices and the home, but don't just take our word for it ...

"Very easy to handle ... very powerful ... A very capable package with both hardware and software performing in a user friendly manner ... Documentation is excellent ..."

A & B Computing
Micro User

"A sophisticated package with potential for a variety of applications"

Microelectronics Education Programme

Supplied complete with graphed tracing pad, software and manual – an unbelievable bargain.



**MICROL
SPREAD SHEET**
Was £19.95
Now **£9.95**
incl. VAT


Complete with cassette and a A4 page manual, plus 4 free ready-to-use models (including bank account, manager and cash-flow projector). The spread sheet turns your BBC computer into a powerful 'super-calculator' that helps you solve all types of calculating problems quickly and easily. Based closely on Visicalc, the world's best-selling programme, the spread sheet has literally hundreds of applications.



**ECHO
KEYBOARD**
Now **£99.95**
incl. VAT

For the beginner or the accomplished musician, the superb touch sensitive Echo keyboard will soon have you exploring the musical possibilities of the BBC and Commodore computers.

Supplied complete with keyboard, manual and software. You will instantly have control and be able to imitate numerous instruments such as the piano, flute, violin and piccolo ... sheer music to the ear at £99.95 including VAT.



**DISK
STORAGE FILE**
50 capacity **£29.95**
20 capacity **£4.99**
incl. VAT

Keep your flexible disks safe with the 'mini disk file', a complete filing system for 5 1/4" disks – not just a container. The result of detailed development and careful analysis of user requirements, it is manufactured to the highest standards from top quality materials. Each disk is positively located in individual guides, remaining neatly filed whether the box is fully loaded or not. Smaller 20 capacity box also available.

● Holds 50 5 1/4" disks
● Finished with cream base and smoked acrylic lid
● Lockable with carrying handles
● Full indexing system
● Virtually unbreakable

If you cannot find the product you require in our price breakthrough send for free brochure for details of our complete range.



All of the products offered for sale by Philips & Philips Co. Ltd. are fully guaranteed, all are offered as perfects and are available for immediate delivery, direct from stock.

PHILIPS & PHILIPS CO LTD



Scriptomatic House,
Torrington Park, Finchley,
London N12 9QU.



01 446 5648



ELECTRON
Was £199.95
Now **£129.95**
incl. VAT

LOWEST
PRICE IN
THE U.K.

The amazing 64k Acorn Electron on offer at the lowest price in the U.K. The computer that uses the same language as the versatile BBC micro – available only while stocks last.



**COMPUTER
FURNITURE**
Was £79.95
Now **£49.95**
incl. VAT

The very highest quality is represented in this all steel framed computer desk, finished in bronze and teak this is not to be confused with the cheap chipboard bendies.



**TEAC
3" DISK DRIVE**
Was £177.95
Now **£89.95**
incl. VAT

This must be the least expensive disk drive on the market, the revolutionary 3" drive is supplied complete with manual and totally enclosed media, which is completely resistant to dust, and designed to reduce the possibility of damage during use and storage – what a bargain.

★ Disk filing system (for the BBC micro) £79.95. ★

At this price supply is limited to one d.f.s. with every disk drive ordered and again the first to come will be the first served.

PRIORITY ORDER FORM

Please rush to me:	Quantity	Unit Price incl. VAT	Total
Acorn Electron		£129.95	
EX43 Typewriter		£160.00	
Graphics Tablet		£59.95	
Teac 3" Disk Drive		£89.95	
D.F.S. (operative)		£79.95	
Echo Keyboard		£99.95	
Microl Spread Sheet		£9.95	
Computer workstation		£49.95	
Disk storage box (50)		£29.95	
Disk storage box (20)		£4.99	
Complete product brochure		FREE	
Postage and packing		FREE	
		TOTAL	

Please debit my Access/Barclaycard No.
Signature
Please find enclosed remittance of
Name
Address
Tel No.
Philips & Philips Co. Ltd., Scriptomatic House, Torrington Park, Finchley, London N12 9QU. Tel. 01 446 5648

Ambidextrous fire buttons

VULCAN Electronics' new Harrier joystick offers a unique configuration of fire buttons that make it acceptable to both left and right-handed players. And it has suction pads to prevent the whole assembly wandering.

Vulcan also offers a BBC or Electron interface that plugs directly into the analogue port to allow Vulcan or any Atari-style joysticks to be used. The package also includes software that enables joysticks to take over normal keyboard gaming control.

The joystick costs £10.95, and the BBC and Electron interfaces £12.95 and £19.95 respectively.

Contact Tigress Marketing on 01-871 1136 for details.

Hi-tech week

A ONE-WEEK course designed to introduce managers and workers in small firms to information technology is to be run at the Microcomputer Advisory Centre, at London's South Bank Polytechnic.

Forty per cent of the time will be spent working at micros on business applications.

The 'Newtech' course starts on April 29 and costs £100, although MSC training grants can reduce the cost to almost nothing.

Contact Jack Plateau on 01-928 8989, extension 2410.

Pascal talks

THE Department of Computer Science, Queen Mary College, London, is holding an afternoon seminar on 'The Future of Pascal'. Current developments in Pascal standards and the use of improved Pascal in teaching programming will be discussed. The speakers are John Souter, Convener of the BSI Pascal Working Group, and Richard Bornat from the Department of Computer Science, Queen Mary College.

The seminar will take place on April 3, 1985 from 2-5.30pm. Details from Sue White, Department of Computer Science, Queen Mary College, Mile End Road, London E1 4NS, tel: 01-980 4811, extension 3917.

Acorn agent breaks into Russian micro network

ACORN may be having a few domestic problems but overseas things are on the up and up.

Acorn distributor 3SL Overseas has made its first sales in Russia, and plans are well advanced for a Mexican company to manufacture the BBC under licence (see below).

Breakthrough in Russia follows a year of careful planning by 3SL and should lead to further sales to educational institutions.

The machines sold by 3SL are a Russian version of the Beeb that can display the Cyrillic as well as the Roman alphabet. It was developed jointly by 3SL and Acorn.

Initial deals involve 30 BBC micros and three Econet networks. The Econets will be installed in the state university in Latvia, the ministry of secondary education in Moscow and the ministry of professional and crafts training.

Mexico deal gives Beeb south-of-border base

MEXICO is being tipped as the next major market for the BBC micro. Acorn has signed a deal with a 100 per cent Mexican-owned company called Datum to manufacture the machine for Mexico and South American markets.

The licensing deal follows a British Overseas Trade Board mission to Mexico last spring. As a result of the mission the Mexican ministry of education ordered a 48-station Econet network for evaluation.

Acorn's distributing company in Mexico, Harry Mazal, reports a strong interest in the Beeb and says that at a recent show its stand was virtually mobbed.

Datum hopes to be manufacturing 2000 Beebs a month by May. Initially, most of the manufacture will be done in the UK by Acorn with Datum doing the final assembly, but progressively more of the



Thirty Beebs are Russia-bound, and Mexico tests the Graduate



The other destinations are the maths department at Moscow University and the Kiev Institute of Welding.

Said 3SL director David Springle: 'Russia is a potentially enormous market. There are 79,000 schools in the country and they have been instructed by the Politburo to improve the

level of computer teaching facilities.' But Springle is under no illusions about the difficulties of selling to Russia. 'At the moment they are buying evaluation systems. How many more they buy depends on how much money they have allocated in their budgets,' he said.

'We thought it would take longer to make the first sales. So we are very pleased with our first year's work and expect to see a steady growth in sales in the future,' he added.

The equipment will be shipped out shortly when 3SL has got the necessary export licences. Under the regulations covering the sale of high-technology equipment to Eastern Europe, a special licence is required for the Econet systems and this will take about two months. Stand-alone eight-bit micros such as the Beeb don't require such a licence.

Negotiating sales to Russia is notoriously difficult so 3SL's success is something of a coup. An important factor in that success is that Springle worked for five years in Russia as the representative for ICL, and another 3SL director speaks fluent Russian.

The company will be sending staff to Russia to install the systems and provide training and after-sales support. Eventually, it hopes to establish its own office in the USSR.

On television

The current series of BBC TV's *Micro Live* has now ended. But the good news is that when it comes back on October 4 it will become a weekly programme and will probably go out at the more convenient time of 7pm.

There are just two programmes left in the 4 *Computer Bufts* series which goes out on Mondays on Channel 4 at 5.30pm. The edition on March 18 will carry a feature on Pascal, a possible interview with Sir Clive Sinclair and the modem corner will look at Knowledge Index, the large American dial-up database.

Communications will also feature heavily in the March 25 edition with a look at the success (or failure?) of the show's own bulletin board and a round-up of comms. Both shows will, of course carry the usual micro news, software transmissions and infamous flashing blob in the corner of the screen. Meanwhile, we're trying to find out if Channel 4 is paying *PCW*, or vice-versa.

Thames' *Database* programme is set to return to the TV screens in June.

On show

□ April 16-18, Northern Computer Show '85, Belle Vue, Manchester. Contact: Mike Birch/Chrissy Cottle, 01-643 8040.

To contact

□ Acorn Customer Services (0223) 210111
 □ Radio 4 *Chip Shop's* Chip-line:
 London 01-790 3400
 Liverpool 051-236 8474
 Birmingham 021-355 6144
 Bristol (0272) 279494
 □ BBC TV's *Micro Live* bulletin

board is on 01-579 2288 (type INFO BBC on Telecom Gold electronic mail system).

□ BBC Computer Literacy Project, Broadcasting Support Services, PO Box 7, London W3 6XJ. Please send stamped-addressed envelope.

□ MEP (Microelectronics Education Programme), Cheviot House, Coach Lane Campus, Newcastle-upon-Tyne, NE7 7XA. Hardware and software support for schools. Please send sae.

□ MAPE (Micros and Primary Education), c/o Barry Holmes, St Helen's Primary School, Bluntisham, Cambs. User group for primary teachers. Please send sae.

□ MUSE (Micro Users in Schools and Education), PO Box 43, Hull HU1 2HD. User group for teachers and parents. Please send sae.

□ National Extension College, 18 Brooklands Ave, Cambridge CB2 2HN. Educational and training courses on the BBC micro. Please send sae.

□ CET (Council for Education Technology), 3 Devonshire Street, London W1N 2BA. Government body which oversees MEP. Please send sae.

□ Software Limited configure CP/M programs for the BBC micro. Write for a catalogue to No 2 Alice Owen Technology Centre, 251 Goswell Rd, London EC1N 7JQ. Tel: 01-833 1173.

For help

□ To contact *Acorn User* authors, write c/o the editorial address given on page 2.

□ Seikosha AP/GP100 printer help sheets are available from *Acorn User* for 50p, plus sae. These consist of three programs, including a screen dump, and three pages of notes on using these printers with the BBC micro.

□ Monitor choice: Photocopies of the review of four monitors, plus a set of nine test programs from the June issue cost 72p (inc post).

□ Bulletin boards: Information on 26 free-access boards was given in the October issue. 54p for photocopy (see page 93).

□ For *Acorn User* cassettes, discs, back issues, binders, contact PHS Mailings on (02934) 72208 (see page 96).

On Prestel

TUBELINK is a database for users of second processors on Viewfax, which is part of Prestel Microcomputing.

Pages start at ★258216# and are aimed at programmers with 6502 and Z80 add-ons (Torch and Acorn).

For disc

□ Tape to disc transfer utility: June 84, p55.

□ 40/80 dual format discs: produce discs readable on both types of drives, Feb 84, p69.

Blunderbox

□ HEINEMANN, the publishers of the *Dudley Programs* (reviewed December 84), tell us that disc versions are now available. Theme Packs cost £36 + VAT and the Complete Suite, £195 + VAT. They are obtainable from Heinemann Education Books, The Windmill Press, Kingswood, Tadworth, Surrey KT20 6TG.

□ LOCO Systems' (Modem review, February issue) phone number should have read 04862 4480.

□ THE Fischertechnik Robot Kit is available from Artur Fischer UK, Fischer House, 25 Newtown Road, Marlow, Bucks. Tel: Marlow 72882/6.

□ AN error appeared in the Quadline (January issue) disc notes. On page 67, the top of column three should read: "... and enter the following lines from listing 1: 10 to 200 inclusive, 250 to 360 inclusive ...". Also, line 6 of the listing in that column should read:

6 FOR L%=0 TO &1000
STEP 4

January's cassette contained the correct listings for Quadline. However they are saved under the author's name as ACTON1 and ACTON2. The former chains the latter in as Q2, which is never found. To use the programs correctly save them to disc or tape using the instructions provided in the article.

□ JOE Telford's Ed-fax listing (January issue) contained an error in that the two semicolons in line 900 look like colons. Line 900 should therefore read:

900 PRINTTAB(0,24);
STRING\$(39,"");

Several of you were confused by the pixel editor. Before selecting the graphics mode, and while in alphabetic mode, select the desired colour of the graphics - ie CTRL-f7 for white, then press the Return key to move into the graphics mode. The QWASZX keys can then be used to generate, set and clear teletext pixels.

□ ALSO in January, a minor error crept into Peter Sandford's colour fill routine (listing 4, page 117). In certain circumstances, this will cause the routine to leave a single pixel uncoloured when filling into an acute angle. This can easily be overcome by amending the following three lines:

4300 CMP &74:BNE
notequal:CLC

4310 .notequal

4320 LDA xhi:SBC &75

These lines should be changed after the original listing has been entered and debugged, as they will invalidate the checksum test at line 90. This line should therefore be deleted before assembling the amended code.

□ MALCOLM Banthorpe's Turtle program (February issue) contained a slight error. In line 470 the + sign should in fact be a - sign. This now means that you turn left when LEFT is entered rather than turning right in response to LEFT!

How to present programs and articles

FIRST read the 'Notes for Authors' on the contents page.

Your submission should be original and have a practical use. We receive many articles on subjects we have already covered - often quite recently.

A neat and clear presentation is very important. A few hours' thought about how your article looks, diagrams, appli-

cations and documentation will ensure that it is evaluated quickly and efficiently, and is more likely to be accepted.

Program presentation is also important. Follow the 'standard' we've adopted in the yellow pages. Most importantly, your program must run on Basic 1. The only exception is if the program is of a Basic 2

tutorial nature. Basic and illegal calls to routines in the MOS should not be used. Program lines should increment in steps of 10, with the first four being REMed as per the format in the yellow pages.

Program listings should not be indented, and avoid multi-statement lines.

Use the standard assembler

presentation, one mnemonic per line, upper case mnemonics with lower case labels. If the assembler is long include a checksum.

Provide a list of PROCs, FN's and variables detailing the operation of each on a separate sheet of paper, along with any hints or tips regarding entering the program.

If you're into program writing...

Get this into an envelope

If the programs you are writing involve sophisticated graphics, you have two choices, a severe headache or Touchmaster.

Obviously you'll want to consider the matter, so in the mean time send away for your free Touchmaster literature and find out more about the best value/performance graphics tablet available... or take two pain killers!

TOUCHMASTER



Touchmaster Limited, PO Box 3,
Port Talbot, West Glamorgan, SA13 1WH.

ACORN USER APRIL 1985

To Touchmaster Limited, FREEPOST, Port Talbot, West Glamorgan, SA13 1ZZ.
Please send me free Touchmaster literature.

AU 4/85

Name

Address

Make of
computer

Oxford Pascal is Fast

Oxford Pascal compiles down to FAST COMPACT P-code, giving you the real speed and power of Pascal, together with the ability to compile very large programs.

Oxford Pascal is Standard

Oxford Pascal is a full extended implementation of Standard ISO Pascal. This means that you can compile any Pascal program (subject to size), written on any computer, anywhere.

Oxford Pascal is Compact

Because it compiles into P-code, Oxford Pascal reduces programs into the most compact form possible. In fact it allows you to pack more code into your BEEB than any other language, and should your programs become too large, you can still use the CHAIN command to overlay limitless additional programs without losing data.

Graphics & Sound Extensions

In addition to the entire Pascal language, Oxford Pascal features a whole range of Graphics (all modes) and sound extensions designed to make maximum use of the BBC computer. Oxford Pascal also provides numerous extensions such as hexadecimal arithmetic and bit manipulation instructions.

Oxford Pascal in Education

In Education, Oxford Pascal is fast becoming a *de facto* standard. It is already the most popular Pascal on the Commodore 64, and will soon be released for the Spectrum and the Amstrad. In fact, Oxford Pascal will soon be available for 90% of the computers installed in the U.K., and is already available in German, French, Swedish, and American versions. Students and teachers alike find that it makes sense to use a standard implementation of Pascal across the whole range of educational micros. Call us for details of our generous educational discounts.

Resident and Disc Compiler

Oxford Pascal comes in two forms:

For Tape Users... Oxford Resident Pascal a compiler located largely in ROM which is available at any time. Programs can be written and compiled on the spot without disc or tape access, and compilation is fast enough to make using the compiler much like using the BASIC interpreter. Thus, learning Pascal is a simple interactive process. Some 15K of memory is available for user programs, the remainder being reserved for compiled object code.

For Disc Users... Oxford Disc Pascal offers all the above PLUS...a full disc compiler which is capable of using the WHOLE memory for Pascal object code, it is supplied with a powerful LINKER, allowing you to break large programming tasks down into separately compilable, easily-manageable files.

Manual

Both these compilers come with a manual which has been carefully designed, not only as a quick reference guide, but also as a full tutorial for those new to Pascal.

OXFORD

ISO
STANDARD

SPEED

TUTORIAL STYLE
MANUAL

FULL DISC
TO DISC
COMPILATION

Compilers like these

OXFORD PASCAL

**EDITOR
EXTENSIONS**

**GRAPHICS
AND
SOUND**

**INTERACTIVE
RESIDENT MODE**

**FRIENDLY ERROR
REPORTING**



Oxford Computer Systems (Software) Ltd.
Hensington Road, Woodstock, Oxford OX7 1JR, England
Telephone (0993) 812700 Telex 83147 Ref. OCSL

Friendly Error Messages

Many compilers produce little more than an error and line number to help correct mistakes in Pascal programs. Oxford Pascal however, gives you one of 49 friendly and informative error messages, messages which not only indicate the reason for an error, but also print out the line in question with a pointer to the exact position where the error was detected. Run-time errors are reported using line-numbers from the original source-program with a full explanation of how the error occurred.

Powerful Editor

With Oxford Pascal there is no need for you to learn how to use a new Editor. Pascal programs can be entered in exactly the same way as BASIC programs, without the need to learn any new commands. When you are used to using Pascal, you will find our extensions to the Standard Editor even more useful. What is more, Oxford Pascal allows you to mix BASIC and Pascal together, in much the same way that you can mix BASIC and assembler. In fact you can, if required, mix all three together...BASIC, Pascal and assembler...in one program.

Stand Alone Code

Unlike other compilers, Oxford Disc Pascal allows you to compile on the BBC and then relocate your program so that it will run on the BBC and on the Electron. The relocated program will run without a Pascal ROM and can be loaded and run from tape or disc just like any other program.

This means that you can distribute or sell your software freely and without the need for ROMs, to run on either of the above machines.

Price/availability matrix

	BBC 'B'	ELECTRON	C64	SPECTRUM
DISC	£49.95	Not yet!	£49.95	Available April 1st 1985
CASSETTE	£39.95	£59.95 inc. Cartridge	£22.95	

All prices are inclusive of VAT Please add £2.00 for postage and packing.

Oxford Compilers — The Future

During the next year, we at Oxford will be releasing a series of language implementations such as C, and Modula 2, for the BBC, and other popular micros.

These compilers are being built, using the most modern techniques in automated compiler construction, and will bring to the micro-user, a level of robustness and efficiency, only now becoming available to mini and mainframe users.

Oxford...
the Compiler
Compilers.

Oxford Pascal Order form. Please make cheques payable to OCSL Ltd.
Please rush me my copy of Oxford Pascal, I enclose £.....
including £2 postage and packing
My computer is BBC 'B' ☐ ELECTRON ☐ C64 ☐ (please tick as appropriate)
I would like my compiler supplied on DISC ☐ CASSETTE ☐
Name
Address
Postcode
Telephone

don't grow on trees



FROM SMALL ACORNS, SOLIDISK GROWS.

IN JULY 1983, we released the Sideways RAM for the BBC computer. We sold 5 in the first week, 10 in the second week, 20 in the third and one year later, we sell more than 500 in the UK and well more than 100 a week abroad.

By the time you read this, more than 30,000 Solidisk Sideways RAM boards will be beaver away in hundreds of schools and thousands of homes.

They are being joined by thousands of Solidisk DDFS each month. Soon, we hope, they will all be linked together by Solidisk Single Chip MODEM.

To support the users, a network of Solidisk Local Experts, covering the UK, Holland, France, Australia and Israel has been set up and expanding. Providing fitting and software.

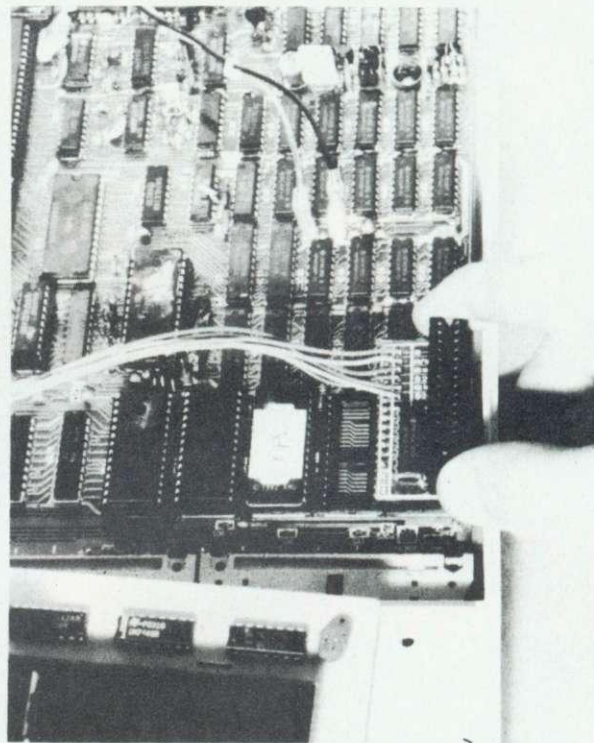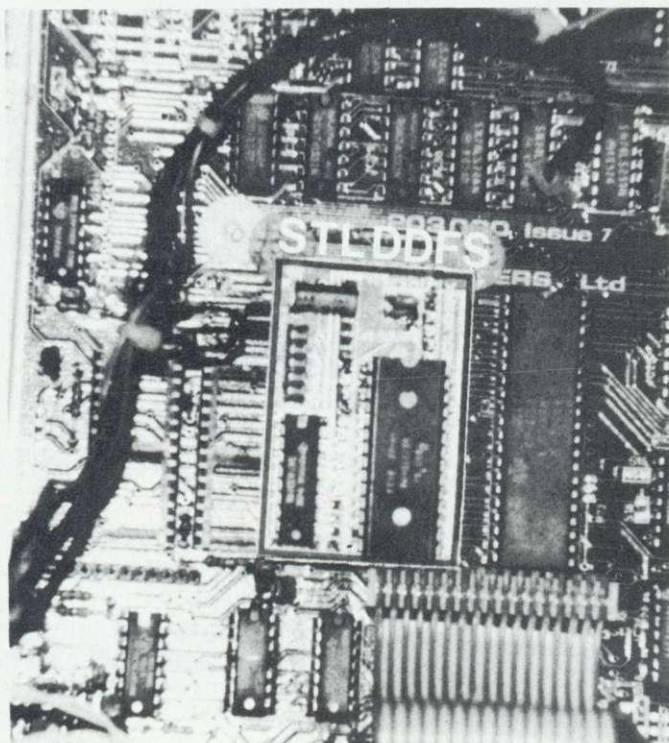

SOLIDISK DOUBLE DENSITY DFS 1.5:

Single and Double Density.

Automatic Density Selection.

1 or Twin Drives, 40 and 80 Tracks, Single and Double Sided.

Automatic 40 and 80 Track Selection.

31 Filenames.

Low Cost.

SOLIDISK DOUBLE DENSITY DFS 2.0:

Virtually Unlimited Number of Filenames.

Automatic Tape to Disk.

Built-in Disk Fix and Disk Sector Editor.

Built-in Wordprocessor.

Does not Require DNFS With Z80 and 6502 Second Processors.

SOLIDISK SIDWAYS RAM:

Add from 16k to 256k bytes of RAM to the BBC 32k RAM.

Useable for running Sideways ROM Software.

Useable in Networks or on BBC with Disk Drive(s).

Compatible With All Acorn Existing Products.

Including Econet, Teletext, 6502 and Z80 Second Processors.

Compatible With Most Sideways ROM Software.

Available Multi User Licencing Agreement from Leading Software Houses.

Easily Expandable as Your Needs Grow.

Low Cost.

Free Installation if Required.

Very large User Base, Extensive Free Software.

Local Help by Solidisk Local Expert Network.

Free Membership to receive Periodic Newsletters.

COMING SOON:

SOLIDISK is at present developing a state of the art MODEM. This will be compatible with the CCITT V23 and BELL 202 transmission standards at speeds from 5 to 1200 Bauds and will be based on the TMS 3105 single chip FSK MODEM manufactured by TEXAS Instruments.

The price is expected to be £39.95 inclusive of VAT.

We need you and your help. To make Solidisk Users the largest BBC Users Group. To share good ideas and good ways to use them.

SOLIDISK TECHNOLOGY, 17 SWEYNE AVE, SOUTHEM-ON-SEA, ESSEX

TEL. (0702) 354674 (10 lines).

HAVE YOU ALREADY GOT DISK DRIVE(S) FOR YOUR BBC COMPUTER?

OPERATIONS	S/D TIME	D/D TIME
FORMAT 40 TRACKS:	17.74	17.74
FORMAT 80 TRACKS:	33.22	33.22
VERIFY 40 TRACKS:	9.30	9.30
VERIFY 80 TRACKS:	17.84	17.84
BACKUP 01 80 TRACKS:	37.69	37.69
BACKUP 02 80 TRACKS:	39.46	39.46
COMPACT 100K-10 FILES	22.42	18.82


CUT THE COST OF

Solidisk DDFS comes with free bundled software (see picture)

- Solidisk Database — a fast, efficient and flexible disk-based ideal for prescription records, club membership etc.
- Solidisk wordprocessor.
- Solidisk electronic spreadsheet.
- Stock Control — very useful for small commerce. Fast easy to follow operating instructions, stock items can be supplied by frequency of movements etc. Stock valuation re list, reorder forms can be printed automatically as requested.
- Silicocon — the most successful spelling checker with Et dictionary. Self dictionary generating capability.
- Macro Basic — a BASIC program generator capable of creating new programs. Simple ingenious.
- Benchmark for disk drive and disk utilities.

4 — OUTSTANDING PERFORMANCE:


The Solidisk Database Package (Solidisk DDFS) is a fast, efficient and flexible disk-based ideal for prescription records, club membership etc. The Solidisk wordprocessor. The Solidisk electronic spreadsheet. The Solidisk Stock Control — very useful for small commerce. Fast easy to follow operating instructions, stock items can be supplied by frequency of movements etc. Stock valuation re list, reorder forms can be printed automatically as requested. The Solidisk Silicocon — the most successful spelling checker with Et dictionary. Self dictionary generating capability. The Solidisk Macro Basic — a BASIC program generator capable of creating new programs. Simple ingenious. The Solidisk Benchmark for disk drive and disk utilities.

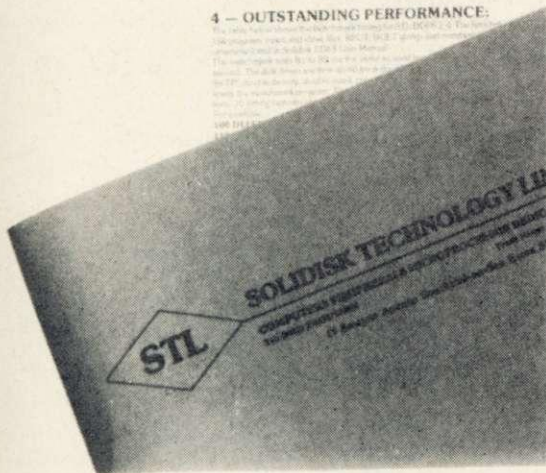

RUNNING YOUR MACHINE

random access database.

includes menu driven, grouped by categories, by part (inventory), sale price, English, French and German and bits of old programs to

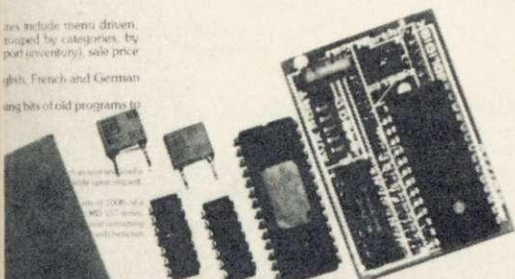

OPERATIONS	S/D TIME	D/D TIME
FORMAT 40 TRACKS:	17.74	17.74
FORMAT 80 TRACKS:	33.22	33.22
VERIFY 40 TRACKS:	9.30	9.30
VERIFY 80 TRACKS:	17.84	17.84
BACKUP 01 80 TRACKS:	37.69	37.69
BACKUP 02 80 TRACKS:	39.46	39.46
COMPACT 100K-10 FILES	22.42	18.82

THE SOLIDISK DOUBLE DENSITY DFS

If you take your Disk Systems seriously then there are very few viable alternatives to our new Double Density Filing System.

Anyone, with their ear to the ground, will probably have heard of the great shortage of the 8271 Floppy Disk Controller chip. This chip is, of course, the basis of all single density DFS upgrades for the BBC Microcomputer and is used extensively by Acorn, AMCOM and Watford Electronics in their respective DFS's.

This shortage can mean long delays or paying much inflated prices to obtain your Disk Upgrade.

Now, however, we at SOLIDISK have developed an alternative system with many advantages over the 8271 based upgrades. Not the least of these being continuation of supply of the FDC chip (Western Digital 1770) but, also, improvements in the speed and versatility of operation.

EASY TO INSTALL

The SOLIDISK DDFS comes complete with an easy to follow manual with step by step installation instructions, and can be fitted in just a few minutes by anyone with just the barest knowledge of the insides of their BBC.

The DFS contains just 4 IC's and 2 jumpers to be inserted and one link to be cut in the computer. This is compared to the usual upgrades which require 11 IC's to be fitted and the link to be cut.

EASY TO USE

The SOLIDISK DDFS Revision 1.5 contains many time and labour saving features. These include formatter, verifier, automatic density sensing, automatic 40/80 track switching and Single/Double Density mass copying etc.

COMPLETE CONTROL OVER THE DISK

SOLIDISK DDFS gives you complete control over your disk drive(s). You can use any combination of Single/Double Density, 40 or 80 tracks in one or two disk drives.

Every time the SOLIDISK DDFS accesses the disk it detects the density and the disc size in use and acts accordingly.

You can for example copy from a 40 to an 80 track disc on the same 80 track disk drive or even format a 40 track disk in an 80 track drive using the automatic disc size sensing in the DDFS. It is also possible to have one side of a disc formatted in Single Density and the other side in Double Density. Also copying between different densities is coped with automatically and, when using twin drives, is very fast.

GREATER DISC CAPACITY

When formatting a disk with the SOLIDISK DDFS you have a choice of the usual Single Density or the increased capacity Double Density.

Formatting in Single Density will leave your disk compatible with all other Single Density systems. However if the disk is formatted in Double Density it will have a 60% greater capacity than the equivalent size Single Density disk. This means that on an 80 track disk that the capacity is increased from the usual 400 kbytes to 640 kbytes of storage. The Double Density Format used is, at present, unique to the SOLIDISK DDFS and provides 16 sectors per track as opposed to the usual 10 sectors in Single Density giving a 40% saving in media surface for a file of given length over Single Density.

INCREASED SPEED OF OPERATION

As mentioned previously a disk formatted in Double Density uses about 40% less disk space per given length of file than does a disk formatted in Single Density or alternatively it holds 60% more information per track. This allows the, already fast, SOLIDISK DDFS to run very fast in the Double Density mode as demonstrated in the benchmark test on the next page.

BENCHMARK OUTSTANDING PERFORMANCE:

The table below shows the benchmark timing for STL DDFS 1.4. The benchmark consists of disk operations such as save and load a 16k program, open and close files, BPUT, BGET strings and numbers, format and verify a disk etc., and is available upon request, otherwise listed in Solidisk DDFS User Manual.

The benchmark tests B1 to B9 are the same as used by many reviewers. The time is expressed in seconds and parts of 100th of a second. The disk drives are twin 40/80 track double sided MITSUBISHI M4853, the diskettes are Verbatim Datalife MD 557 series, 96 TPI, double density, double sided, pre-verified to ensure that the media is free of all error and mechanical defects and containing solely the benchmark program. The test is loaded into memory, the drive motors are allowed to stop completely 2 seconds between tests, 10 timing samples are taken and the mean time is calculated automatically.

For example:

100 DEFFNB1:REM Save a 16k program.

110T% ÷ TIME

120 *SAVE A 8000 +4000

130 ÷ TIME — T%

Full listings are included in the User Manual.

This FN is called 10 times with 3 sec. interval, the mean result is printed as 'B1'.

BENCHMARK DESCRIPTION	S/D TIME	D/D TIME
B1 Save 16k	2.62	1.43
B2 Load 16k	2.45	1.23
B3 Openin and close 100 times	20.70	20.16
B4 Openout and print 1000 numbers (255)	5.84	4.66
B5 Openin and input 1000 numbers (255)	4.72	4.14
B6 Openout and print 100 80 bytes strings	6.18	4.91
B7 Openin and input 100 80 bytes strings	4.90	4.31
B8 BPUT 100 bytes (255)	3.01	2.06
B9 BGET 1000 bytes (255)	1.88	1.52

Note 1: Whenever a file is to be opened, STL DDFS automatically refreshes the disk directory, thus preventing erroneous disk change. Many other DFS's do not take the same care, although yielding a much shorter time, and this could accidentally stop the program.

OPERATIONS	S/D TIME	D/D TIME
FORMAT 40 TRACKS:	17.74	17.74
FORMAT 80 TRACKS:	33.22	33.22
VERIFY 40 TRACKS:	9.30	9.30
VERIFY 80 TRACKS:	17.84	17.84
BACKUP 01 80 TRACKS:	37.69	37.69
BACKUP 02 80 TRACKS:	39.46	39.46
COMPACT 100K 10 FILES	22.42	18.82

With Wordwise:

Load 2000 words (17811 bytes) 16.80 sec. (41.40 sec. with AC).

With Scribe:

Count 2000 words (17811 bytes) 4.20 sec. (9.80 sec. with AC.90 DFS)

With Beebug's Masterfile:


Sort records 1 to 20 in PEOPLE sample database, the database is presorted on field 2 then the program is asked to sort on field 1, the time is then taken: 56.23 sec. (127.86 sec. with AC.90 DFS).

These timings are improved even further in double density mode.

The figures speak for themselves.

STL DDFS dramatically increases the operating speed of your software, including wordprocessors like Wordwise, View, Scribe, databases like Masterfile, Starbase etc.

Solidisk engineers won't stop there.

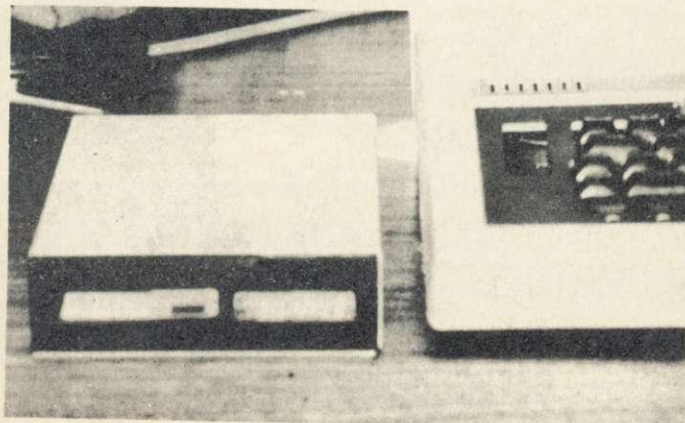

MITSUBISHI DISK DRIVE:

From the new VLSI ultra quiet auto spin-up series comes the MITSUBISHI M4853. We have chosen it for its speed, quiet performance, low power consumption and state of the art design — look at the following features:

— new developments by Motorola and Mitsubishi largely reduce the area taken up by electronics, leaving more room for the diskette. This in turn implies lower noise levels and reduced friction on diskettes.


8 Slim 5.25" half height model attractively cased in BBC micro beige

— Reliability: we find that Mitsubishi compares most favourably with other makes

— Use your BBC own power supply —

— Single and double density available, plus ability to read 40 track diskettes formatted elsewhere when used with our DFS.

Of course, we don't need to mention that all drives come complete with Dual leads letting you add instantly a second disk drive and manual together with full guarantee on parts and labour.

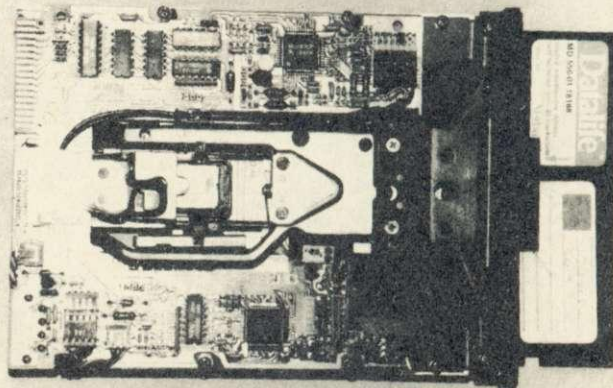

EXTRA FEATURES OF SOLIDISK DDFS 2.0

With the production of the SOLIDISK DDFS 2.0 ROM we raise the already high standard of the previous DDFS 1.5 ROM.

The larger memory capacity of the DDFS 2.0 has allowed inclusion of a Wordprocessor and complete Disk Toolkit as well as a totally new concept in the working of the Disk Directory.

This will, we feel, make the SOLIDISK DDFS 2.0 ROM the most powerful Disk System currently available.

1) EXTENDED NUMBER OF FILENAMES

The standard number of filenames on the BBC micro-computer is limited to 31 on most Single Density DFS's. This usually presents no problem on a system using 40 track drives but when using either 80 track drives and/or a Double Density Filing System this number will quite often be reached with a lot of the disk space still unused.

The SOLIDISK DDFS 2.0 ROM uses a unique and novel way to circumvent this shortcoming as every time a catalogue becomes full a new one is created. This gives the possibility of having up to 1502 filenames on a normal 80 Track Double Sided disk. Even with this large number of filenames worst case access taking only just over 2 seconds. Obviously with large files and a lesser number of filenames the access time decreases dramatically.

The way that the DDFS 2.0 ROM operates means that ordinary single catalogue discs are completely compatible with our system and, indeed, will be upgraded to multi catalogue once the number of filenames exceeds 31. This means no special formatting is necessary and that the disc remains compatible with other Single Density DFS's.

2) DISK TOOLKIT

Included on the SOLIDISK DDFS 2.0 ROM is a powerful disk repair facility. It is possible to read a complete track into memory and to repair or modify the data before restoring the track to the disk. If only one sector needs to be worked on then this too is possible with the Disk Sector Editor contained in the DDFS 2.0.

A powerful Disk Copy routine is also included to allow almost non-standard format disks to be duplicated. This routine will also display the Sector I.D. Fields so that it is possible to see the makeup of the track being copied.

3) WORDPROCESSOR:

SOLIDISK DDFS 2.0 ROM contains a Word Processor with many excellent features such as 80 column screen, automatic on screen justification, Search and Replace, Block Move and Copy etc.

SOLIDISK+MITSUBISHI BIG DEAL:

This is exactly what you would receive:

- one double sided 80 track Mitsubishi M4853 disk drive, cased in beige.
- one Solidisk Double density disk interface (complete with STL DDFS 1.5 ROM) as described overleaf, giving a total capacity of 640K.
- Dual leads and instruction manual.
- 5 Software Diskettes containing a selection of the most prestigious programs written for the BBC.
- full one year guarantee.
- all for £209.95 including VAT and post and packing.

THE HARDWARE:

As described earlier and opposite.

THE SOFTWARE:

A selection of 6 programs based on ease of use, and popularity. All efforts are made so that you would not have to read the manual twice.

All programs feature on screen help (word processor) or option menus throughout. Mode 3 is used throughout whenever possible for good visual representation.

— Solicalc —

A Disc Based electronic spreadsheet made only possible with the speed of Solidisk DDFS. The sheet size can be as big as 170 kbytes. Written in modules, it is easily upgradable. Mode 3 screen. Goto, Calculate, Replicate, Automatic Header etc.

— Solidisk Datafile —

A fast, efficient and random access Database. Solidisk Datafile features:

- Compact size.
- 80 column screen throughout.
- 15 fields of 60 characters per card.
- Unlimited number of cards.
- Powerful Screen Editing allowing VERY FAST data entry on new cards or data correction on old cards.
- All Maths functions on ALL fields admitting Symbolic Variables (like A, B, C, D etc) for entering formulae.
- Special SORT program making use of any free disk space to avoid swapping cards.
- Standard options include View, Print using Tabulation, Print Labels, Search on any number of criteria and repeat on count, Amend, Create, Spool to disk, Append and Mailmerge with Solidisk Word Processor (requires EPSON compatible printer).
- Ability to read BEEBUG's Masterfile and possibly other systems later on.

— Solidisk wordprocessor —

On screen help, Wordstar style cursor editing and control keys, on screen justification while you type, Block commands, Quick commands and dot commands for mailmerge. Future development will allow reading Wordstar text from the Z80 second processor. Solidisk can offer Laser Typesetting and Page Planning service: it costs you only £1.00 for typesetting 1 x A4 page (around 4,000 characters) from disk received by MODEM.

— Stock control —

useful for small businesses. Features include menu driven, easy to follow instructions, easy categorising. Stock evaluation reports and inventories, together with price lists and reorder forms can be printed automatically as requested.

— Sillexicon — the most successful spelling checker with English, French and German dictionaries, together with self generating capability.

— Macrobasic —

a BASIC program generator capable of using bits of old programs to create new ones. Clever ideas — clever ideas of making them work!

Please note that this software is only free as prt of the package deal. It is otherwise avaiable at a cost of £14. Customers who would prefer the DFDC version of our disk filing system (see earlier) can purchase the package deal with this option for an extra £10.

What we may need to tell you is that the price is also agreeably low — check what we offer against any of our competitors — which all adds up to a high degree of sophistication affordable to students and businessmen alike.

WE SHALL ENDEAVOUR TO DELIVER WITHIN 48 HOURS ON CREDIT CARD SERVICE: RIN 3 SOUTHEND (0702) 354674 (10 lines)

SOLIDISK LOCAL EXPERTS

We have local people able to fit your equipment **FREE OF CHARGE** in all of the following towns. If your area is not mentioned ring the office!

BASILDON
BEXLEY
BIRMINGHAM
BOSTON
COVENTRY

HODDESDON
KINGSTON
LEIGHTON BUZZARD
LIVERPOOL
LONDON

NEW MALDEN
NEWTOWNARDS

NOTTINGHAM
PETERBOROUGH
READING
SHEFFIELD

TODDINGTON
WARDLE
WANTAGE
WIMBORNE
WOKING
WALES

PRICE LIST — INCLUDES VAT & P&P

SIDEWAYS RAM:	£
SWR16 16K ADD-ON	43.65
SWR32 32K ADD-ON	59.95
S/D128 128K ADD-ON	150.95
S/D256 256K ADD-ON	N/A 256.00

EXTENSIONS:	
16-32K FULL EXCHANGE	19.00
16-128K FULL EXCHANGE	110.00
32-128K	95.00

SOLIDISK DFS:	
STL DDFS DISK UPGRADE	39.95
STL DFDC (goes with Acorn DFS)	49.95

DISK DRIVES:	
MITSUBUSHI 2x80 (INC LEADS)	163.00
MITSUBUSHI TWIN + MANUAL	323.00

COMPLETE SYSTEMS: (ie. DRIVES + DDFS)	
MITSUBUSHI 2x80	200.99
MITSUBUSHI TWIN	353.00

CPU	
65-C-02 CHIP	12.00
65-C-02+ SOFTWARE	14.00

EPROM EQUIPMENT	
2764 CHIP	8.00
5 x 2764 PACK	36.00
3 x 27128 PACK	39.95

EPROM PROGRAMMER	20.95
EPROM ERASER — UVIPAC	20.95

DATALIFE DISKS	
MD525 SS/DD 40TRK	17.00
MD550 DS/DD 40TRK	23.00
MD577 SS/DD 80TRK	23.00
MD557 DS/DD 80TRK	29.00
WAB M16A DS/DD 80TRK	24.00

SANYO COLOUR MONITORS	
14" — NORMAL RESOLUTION	210.00
MEDIUM RESOLUTION	310.00
HIGH RESOLUTION	410.00

EPSON PRINTERS	
RX80 MATRIX PRINTER	248.35
RX80FT MATRIX PRINTER	282.85
FX80FT MATRIX PRINTER	386.35
BBC PRINTER CABLE	9.00
ELECTRON DISK INTERFACE	40.95

Typesetting per A4	1.00
--------------------------	------

TO: SOLIDISK 17 SWEYNE AVENUE SOUTHEND-ON-SEA ESSEX SS2 6JQ

Please send me:

QUANTITY	ITEM	TOTAL
.....	£.....
.....	£.....
.....	£.....

MY BARCLAY/ACCESS CARD NO. IS

NAME:

ADDRESS:

VOLUME DISCOUNTS AVAILABLE — PHONE SALES OFFICE (0702) 354674 (10 LINES)

INTRODUCING THE DFDC!


For those who already have the Acorn DDFS installed in their computer and would like the advantages of increased speed and storage capacity that Double Density systems offer SOLIDISK have introduced a totally new concept in the shape of the DFDC!

The DFDC board simply sits in place of the 8271 FDC, this being reinstalled in the DFDC board. Now all that needs to be done is to install the DDFS ROM into a Rom Socket, to the right of the existing Acorn DFS, and two other minor connections.

Great Value at £49.95 inc.

HAS YOUR BBC COMPUTER GOT ITS SIDEWAYS RAM BOARD YET?


"Break the Ram Barrier" (A&B)

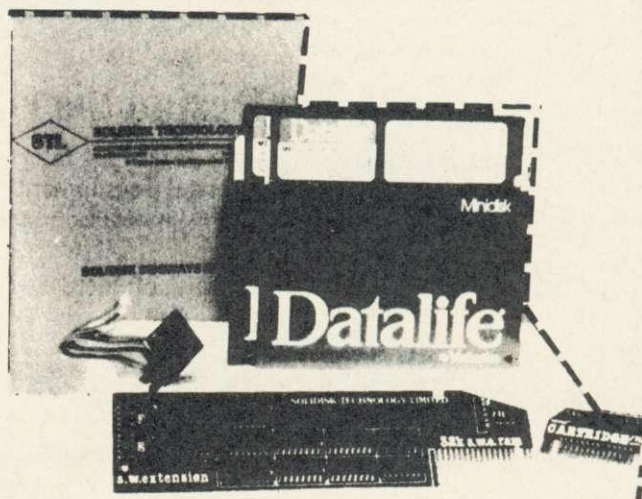

HOW TO ORDER?

You can order any item using the coupon. Prices are inclusive of VAT, post and packing. Access and Barclay card holders can place their order by phone. Educational authorities, Acorn dealers and OEMs can obtain quantity discounts.

OTHER PRODUCTS FROM SOLIDISK: UVIPAC EPROM ERASER:

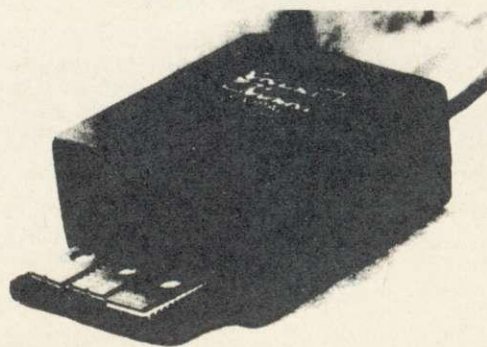

ARE YOU HALF A USER

TEN MAGAZINES PER YEAR • NEWS •

SOFTWARE • DIS

SPECIAL OFFERS

INFORMATION •

TECHNICAL SUP

USER GROUPS •

REVIEWS • NEWS

HINTS & TIPS • DI

APPLICATIONS •

PROGRAMS • SP

GAMES PROGRA

UTILITIES • SOFT

DISCOUNTS • RE


SOFTWARE • NE

INFORMA

TECHN

USER

REV

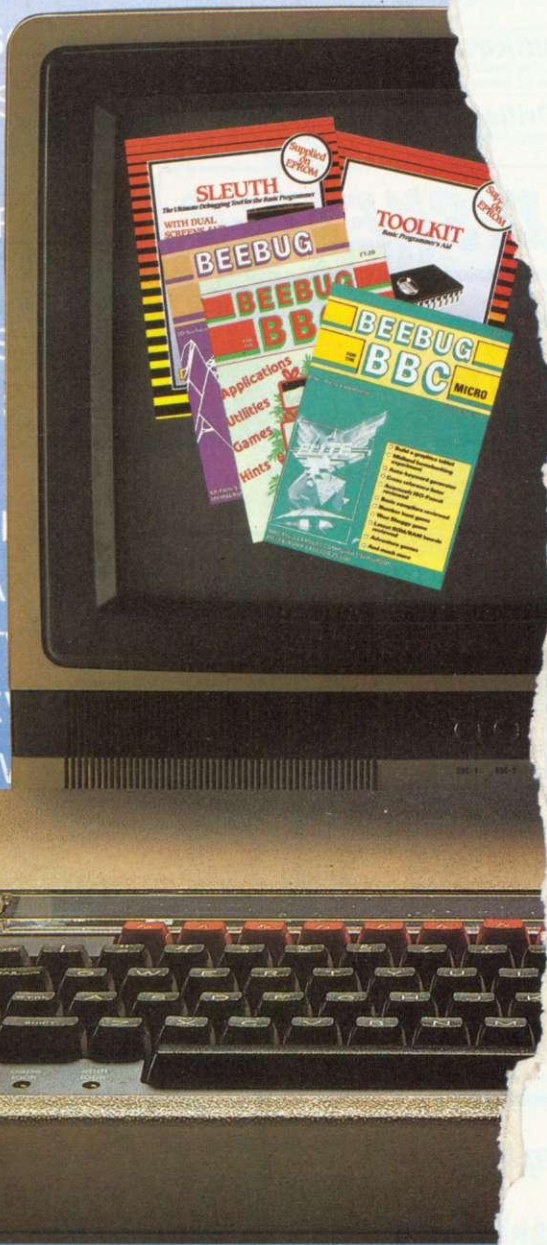

Become a complete user with BEEBUG

Send or phone for a FREE information pack
and sample magazine (UK only), OR
take out a subscription NOW.

(£11.90 1 year, £6.40 6 months UK only)

Telephone (049481) 5228

BEEBUG dept 18, PO Box 109, High Wycombe, Bucks.

DISKING

means business

DISKING FREEPOST, LIPHOOK, HAMPSHIRE GU30 7BR, UNITED KINGDOM

How to contact us:

General Enquiries & Sales (0428) 722563; Trade/Government (0428) 722840; Telex 858623 Telbur G

**DISKING
NEWS**

THE DISKING PROMISE.

If you don't find us the slickest diskette supplier in the world, or if you have ANY reason to be unhappy with our products OR services in ANY way — we want to know. After all we are here to serve you, and if you're not happy — we're not happy. We continuously strive for perfection, and everything you see here is IN STOCK and ready to be shipped within four hours (YES, HOURS!). A full refund if dissatisfied goes without saying.

NEW FROM DISKING.

To brighten up your office desk, just pick up the phone and order your very own SUPERB Colour Coded diskettes. We have RED, ORANGE, YELLOW, GREEN, PALE BLUE and BLUE. They are packed in fives of one colour, and come with a FREE SEE 10 Library Box, and pack of Colour Coders. So before you erase the wrong disk or accidentally leave the master disk out in the dusty environment — COLOUR CODE THEM!

THE DISKING BD (British Disease) AWARD.

Our BD award this week for another useless company, goes to Corralls (Powell Duffryn Fuels Ltd), who, when asked for an urgent delivery of heating oil that we required, answered "We cannot give you a delivery time, and we cannot give you a price, I'm only here to take orders". If any of you out there understand that, we'd love to hear from you?

DISKETTES

Maxell — The Gold Standard 5 1/4" Diskettes

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
MD1-D S/S 48 tpi	23.90	22.90	21.90
MD2-D D/S 48 tpi	34.90	33.90	32.90
MD1-DD S/S 96 tpi	34.90	33.90	32.90
MD2-DD D/S 96 tpi	42.90	41.90	40.90

Certified for single OR double density. 48 tpi suitable for 35 or 40 track operation. 96 tpi suitable for 77 or 80 track operation.

8" Diskettes

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
FD1-D S/S D/Dens	32.90	31.90	30.90
FD2-XD D/S D/Dens	40.90	39.90	38.90

32 hard sector available at the same prices.

3 1/2" Microdisks

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
MF2-DD D/Sided 1.0Mb	59.90	58.90	57.90

3" Microdisks

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
CF2 Compact D/S Floppy	39.90	38.90	37.90



MEMOREX Memory Excellence 5 1/4" Diskettes

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
3481 S/S 48 tpi	22.90	21.90	20.90
3491 D/S 48 tpi	29.90	28.90	27.90
3504 S/S 96 tpi	28.90	27.90	26.90
3501 D/S 96 tpi	36.90	35.90	34.90

Certified for single OR double density. 48 tpi suitable for 35 or 40 track operation. 96 tpi suitable for 77 or 80 track operation.

5 1/4" Diskettes (HIGH DENSITY)

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
5500 D/S 1.6 MByte	49.90	48.90	47.90

3 1/2" Microdisks

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
6100 S/Sided 0.5Mb	42.90	41.90	40.90

Dysan for the Discerning 5 1/4" Diskettes

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
104/1D S/S 48 tpi	23.90	22.90	21.90
104/2D D/S 48 tpi	34.90	33.90	32.90
204/1D S/S 96 tpi	34.90	33.90	32.90
204/2D D/S 96 tpi	42.90	41.90	40.90

Certified for single OR double density. 48 tpi suitable for 35 or 40 track operation. 96 tpi suitable for 77 or 80 track operation.

8" Diskettes

Prices and quantities relate to Ten-Packs


Prices exc VAT	1-4	5-9	10+
3740/1D S/S D/Dens	32.90	31.90	30.90
3740/2D D/S D/Dens	40.90	39.90	38.90

32 hard sector available at the same prices

DataLife



Verex



Verbatim DataLife = Best!

5 1/4" Diskettes

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
MD 525-01 S/S 48 tpi	22.90	21.90	20.90
MD 550-01 D/S 48 tpi	29.90	28.90	27.90
MD 577-01 S/S 96 tpi	28.90	27.90	26.90
MD 557-01 D/S 96 tpi	36.90	35.90	34.90

Certified for single OR double density. 48 tpi suitable for 35 or 40 track operation. 96 tpi suitable for 77 or 80 track operation.

8" Diskettes

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
FD 34-9000 S/S D/D	31.90	30.90	29.90
FD 34-8000 S/S D/D	31.90	30.90	29.90
DD34-4001 D/S D/D	36.90	35.90	34.90

32 Hard Sector available at same price.

3 1/2" Microdisks

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
MF350 S/Sided 0.5Mb	42.90	41.90	40.90

Verbatim Verex = Value

5 1/4" Diskettes

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
MD200-01 S/S 48 tpi	19.90	18.90	17.90
MD250-01 D/S 48 tpi	23.90	22.90	21.90

48 tpi suitable for 35 or 40 track operation.

8" Diskettes

Prices and quantities relate to Ten-Packs

Prices exc VAT	1-4	5-9	10+
FD34-1500 S/S S/D	22.90	21.90	20.90
DD34-1501 D/S D/D	29.90	28.90	27.90

32 Hard Sector available at same price.



coloured diskettes

5 1/4" Supplied in Five-Packs of one colour

Prices and quantities relate to Five-Packs

Prices exc VAT	1-9	10-19	20+
1D S/S 48 tpi	12.90	11.90	10.90
2D D/S 48 tpi	18.90	17.90	16.90
1DD S/S tpi	18.90	17.90	16.90
2DD D/S 96 tpi	21.90	20.90	19.90

To order the colour of your choice, just precede the type number with the appropriate letter, (R) RED, (O) ORANGE, (Y) YELLOW, (G) GREEN, (B) BLUE & (P) PALE BLUE. For the actual colours, please see our full colour advertisement back a couple of pages, or call and ask for our full colour brochure.

FREE! LCD TABLE CLOCK

worth 8.95

with EVERY 20 Diskettes ordered at these prices

When you buy twenty diskettes (any size, make or type) at the prices, you will receive, completely FREE of charge, this superb calendar clock with a large easy to read 24mm LCD display. Forty diskettes and you will receive two clocks and so on.

Offer ends 30th April, 1985

PLUS

FREE with every Ten-pack of diskettes from DISKING (Five-Packs if coloured disks). The Superb SEE 10 Library Box. Also available individually for £2.50 exc VAT, either for 5 1/4" Diskettes



(SEE 10), or 3 1/2" Disks (SEE 10-3). Now also available for 8" Disks (SEE 10-8) at £3.00 exc VAT

PLUS

FREE DISKING Colour Coders
A multicoloured pack of ten fibre tipped pens for colour coding your diskette labels. Available individually at 49p exc VAT.



**BARGAIN
CORNER**

Bargain Corner Diskettes 5 1/4" Diskettes

Complete with a FREE SEE 10 library box and Colour coders, these disks are certified and are from one of the manufacturers in this ad.

Prices and quantities relate to Ten-Packs

Exc VAT (No hub ring)	1-4	5-9	10+
UL1D S/S 48 tpi	13.90	12.90	11.90
UL2D D/S 48 tpi	20.90	19.90	18.90
UL1DD S/S 96 tpi	20.90	19.90	18.90
UL2DD D/S 96 tpi	24.90	23.90	22.90

Suitable for single OR double density.

Exc VAT (With hub ring)

UL1DHR S/S 48 tpi	14.90	13.90	12.90
UL2DHR D/R 48 tpi	21.90	20.90	19.90
UL1DDHR S/S 96 tpi	21.90	20.90	19.90
UL2DDHR D/S 96 tpi	25.90	24.90	23.90

Suitable for single OR double density. 48 tpi suitable for 35 or 40 track operation. 96 tpi suitable for 77 or 80 track operation.

DISKETTE STORAGE



Budget 30
30 Minidisk capacity in smart beige brown complete with five coloured dividers.

Part No	Description	Price exc VAT
B30	30 Minidisk capacity	5.90

If buying 3 to get one FREE p&p @ 4 unit rate please

BUDGET RANGE

Buy 3 of a kind and get the 4th one FREE

POPULAR




Budget Micro

30 Microdisk capacity (or 12x3" disks). Smart two-tone beige brown.

Part No	Description	Price exc VAT
BM	30 Microdisk capacity	6.90

If buying 3 to get one FREE, p&p @ 4 unit rate please.

6.90




Budget 50

50 Minidisk capacity in smart two-tone brown, complete with four dividers and non-scratch rubber feet.

Part No	Description	Price exc VAT
B50	50 Minidisk capacity	8.90

If buying 3 to get one FREE, p&p @ 4 unit rate please.

8.90 Great Value!

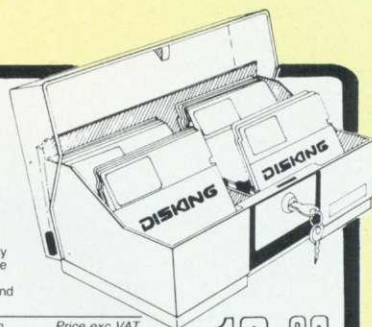

Jumbo Swinger

A massive 120 minidisk capacity (with arms removed). Adjustable arms compensate for less diskettes, complete with keys and carrying handle.

Part No	Description	Price exc VAT
JUMBO	100+ Minidisk capacity	18.90

If buying 3 to get one FREE, p&p @ 4 unit rate please.

18.90

17.90


Disking Swing-Lid Lockable Box

60 Minidisk capacity, complete with keys, dividers, tags and even built in carrying handles.

Part No	Description	Price exc VAT
DSL	60 Minidisk capacity	17.90

If buying 3 to get one FREE, p&p @ 4 unit rate please.

EXECUTIVE



19.90

Executive Range

The ultimate in quality. Luxurious two-tone brown, with dividers, tabs, keys, removable lids — you name it!

Executive Micro 50

Fifty 3.5" microdisk capacity complete with removable lid, dividers, tabs, lock and 2 keys.

Part No	Description	Price exc VAT
EM50	50 microdisk capacity	19.90

If buying 3 to get one FREE, p&p @ 4 unit rate please.

22.90



Executive Mini 100

100 5.25" minidisk capacity complete with removable lid, dividers, tabs, lock and 2 keys.

Part No	Description	Price exc VAT
EM100	100 minidisk capacity	22.90

If buying 3 to get one FREE, p&p @ 4 unit rate please.

DISKING supermailers

These diskette mailers come packed in 100s and are of a very clever copyright design. They will hold up to 4 diskettes complete with envelopes and are extremely robust.

Part No	Description	Price exc VAT
DSM	100 Supermailers	24.90

NEW

Memorex Cleaning Kits

The latest computer care range from Memorex represent fantastic value for money, and are available individually or with a discount if purchasing all three.


Buy all three kits together, and we will reduce the total price from £18.70 to £14.90 SAVING £3.80 — A BARGAIN IF EVER WE SAW ONE!

Part No	Description	Price
MKEY	Case/keyboard cleaning kit	4.90
MTV	VDU screen cleaning kit	4.90
MDD	Disk drive head cleaning kit	8.90

MEMOREX

MEMOREX

COMPUTER CARE



Postage and Packing Rates

UK Shipping Rates exc VAT

5 1/4" Disks or microdisks

1-2 packs each pack @ 95p
3-5 packs each pack @ 75p
6-9 packs each pack @ 60p
10+ packs POST FREE

5 1/4" Coloured Diskettes

1-3 5-packs 50p each pack
4-9 5-packs 30p each pack
10+ 5-packs POST FREE

8" Diskettes

1-2 packs each pack @ 1.60
3-5 packs each pack @ 1.20
6-9 packs each pack @ 90p
10+ packs POST FREE

Budget Storage

1 off £1.00 each
2-7 off 70p each
8+ off POST FREE

Lockable Storage

1 off £2.00 each
2-7 off £1.30 each
8+ off POST FREE

All 'SEE 10' Library Boxes

1-4 off @ 40p each
5-9 off @ 30p each
10+ off @ 20p each

Disking Diskwriters

50-pack £1.00

Disking Colour Coders

1-5 packs 25p per pack
6+ packs POST FREE

Disking Supermailers

100-pack £3.00

Memorex Cleaning Kits

1 off 60p each
2-7 off 40p each
8+ POST FREE

How to Order:



General Enquiries & Sales: (0428) 722563
Government & Trade Sales: (0428) 722840



If in doubt at ANY time, just call and ask for Joan. She will answer any questions that you may have, even if you only want a catalogue and order form, just CALL!

Official Government Orders Welcome

We supply all Government bodies including schools, Universities, Colleges, Hospitals, the Utilities, Research Establishments, Armed Forces, the Ministries and Local Authorities world-wide. We will despatch within 4 (YES, FOUR) working hours from receipt of your official order number received either by post or by telephone and all orders are handled in the strictest confidence and to the letter. All other customers, cheque with order please payable to DISKING. If you are a large establishment and cannot raise cheques without an invoice, please post or telephone your order, and we will send a pro-forma invoice by return for your accounts department to pay against.

Credit Card Orders (0428) 722563 (24hr)

FREE DISKING logo for all orders left on the answering machine. You may call 365 days a year, 24 hours a day, and you may speak for as long as you like when you leave the following details:

1. Day-time telephone number
2. Cardholder name and address
3. Delivery (or invoice address) if different
4. Your Credit Card Number
5. What you want and how many
6. Normal or first class post

We welcome Access (Mastercharge) Barclaycard (VISA) and Diners Club International, and there is NO credit card surcharge. Alternatively you may write your credit card number on your order.

Leave the REST to US!

Urgent Orders

If you are posting your order, leave out the word FREEPOST from our address, and use our normal post code GU30 7EJ and do not forget to stamp it First Class. If you are telephoning your order, please make it clear that your wish to pay for your goods to be sent to you by First Class Post.

First Class Rates

Minidisks & Microdisks:
First Ten-Pack, £2.00. Second and subsequent Ten-Pack, £1.50

Very Urgent Orders

If ordering by telephone, and by 3.00pm you may request Datapost which delivers the next morning at 9.00am. Minimum cost is £10.00 for the first 5kg — please call.

Desperate Orders

Just call and ask for Joan or Roger and we will do whatever we can to help you with your problem. If you are not too far we can probably organise a taxi or courier.




TRADE CORNER

FREE Aeroplane

Our latest aeroplanes have sound, so you'll have no trouble waking up those sleepy software engineers, when you throw it at them. Just call and ask for our flier, and we'll send you our latest trade pack with prices, special offers and sample unlabelled diskette. We'll also enclose a DPC (Disking Priority Customer Card) application form telling you how to buy at our 10,000 prices yet order in 50's.



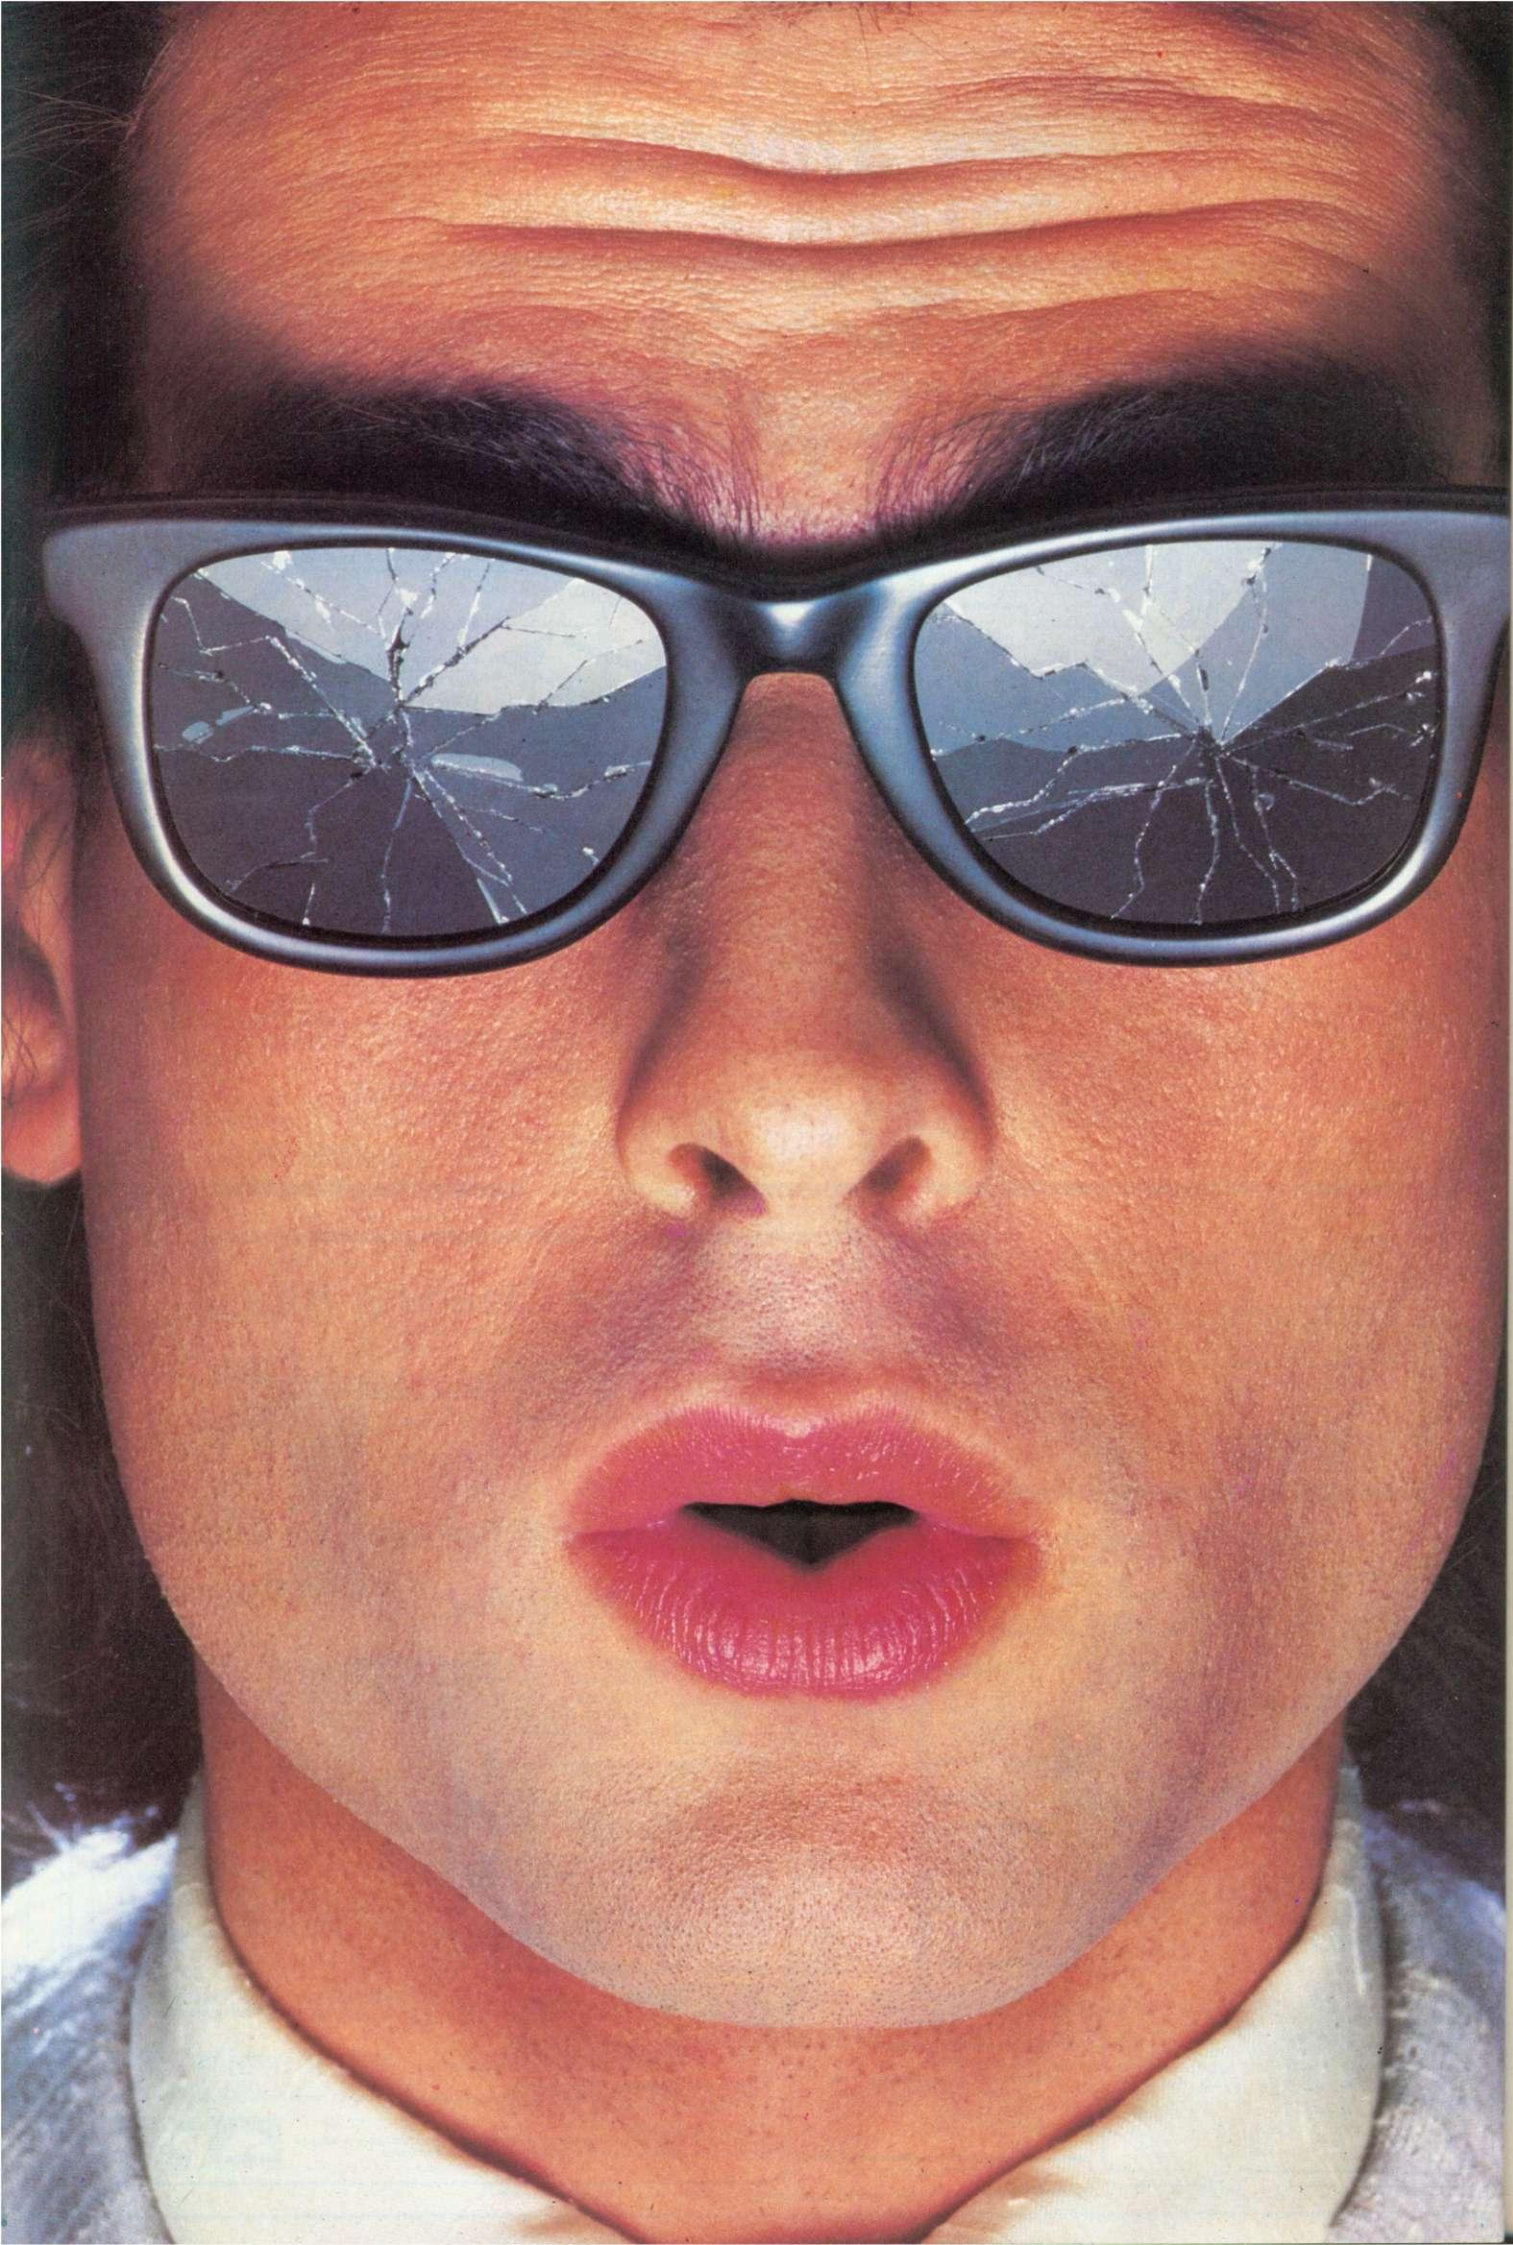

fa
th
ti
m
to
se
of
Su
an
Su
ve
fa
so

You should see what he's just seen.

Micronet 800.

Stretching the mind of your micro far beyond its limits.

Micro evolution continues with this unique communications, information and software system. Set on our mainframes nationwide.

Includes 30,000 pages and access to Prestel™ with its full range of services.

A tremendous Communications section that networks you to thousands of other members across the country. Send and receive electronic messages and graphics at a touch of a button.

And there's the Chatline service, Swapshop and Teleshopping.

Check with daily updates on the very latest computer news.

Micronet also has its own huge facts data base.

And a choice of up-to-the-minute software to download absolutely free.

For only £13 a quarter and just a local telephone call whenever you want to connect up (that's only 22p per half hour at cheap rates) you could be part of Micronet.

The only accessory you need is a Modem.

A small price to pay to join the other visionaries on this exciting new system.



Fill in the coupon for more details and send to Micronet 800, Durrant House, 8 Herbal Hill, London EC1R 5EJ.

But be warned, Micronet 800's features are almost limitless and constantly updating. So maybe you'd be better to call in at Laskys, John Lewis, main Boots or your local Micronet 800 Action Station.

To feast your eyes on all the amazing things it can do.

To: MICRONET 800, Durrant House, 8 Herbal Hill, London EC1R 5EJ. Telephone 01-278 3143.
Please send me the full facts about Micronet 800.

Name _____

Make/Model of Micro _____

Address _____

Telephone _____

AU4

For 97% of telephone users.

™Prestel is a trademark of British Telecommunications.

On Prestel

See Micronet 800 in action.

AVON	DEVON	KENT	MERSEYSIDE	SURREY
Bath. Boots, 1 Marchants Passage, Southgate. Tel: 0225 64402. Bristol. Avon Computer Rentals, 16 West Street, Old Market. Tel: 0272 550600. Bristol. Boots, 59 Broadmead. Tel: 0272 293631. Bristol. Laskys, 16-20 Penn Street. Tel: 0272 20421. Keynsham. Key Computer Systems, 42b High Street. Tel: 02756 5575. Weston-super-Mare. K & K Computers, 32 Alfred Street. Tel: 0934 419324.	Exeter. Boots, 251 High Street, Tel: 0392 32244. Exeter. Open Channel, Central Station, Queen Street. Tel: 0392 218187. Paignton. Computer Systems Ltd, 35 Hyde Road. Tel: 0803 524284. Plymouth. Syntax, 76 Cornwall Street. Tel: 0752 28705. Seaton. Curtis Computer Services, Seaton Computer Shop, 51c Harbour Road. Tel: 0297 22347. Tiverton. Actron Microcomputers, 37 Bampton Street. Tel: 0884 252854.	Tel: 0634 405471. Gravesend. Gravesend Home Computers, 39 The Terrace. Tel: 0474 23871. Gillingham. Regal Software Supplies, 49 High Street. Tel: 0634 579634. Maidstone. Kent Micros, 51 Union Street. Tel: 0622 52784. Rainham. Microwave Computers, 39 High Street. Tel: 0634 376702. Sevenoaks. Ernest Fielder Computers, Dorset Street. Tel: 0732 456800. Shortlands. The Village House of Computers, 87 Beckenham Lane. Tel: 01-460 7122. Sittingbourne. Computer Plus, 65 High Street. Tel: 0795 25677. Tunbridge Wells. Modata Computer Centre, 28-30 St. Johns Road. Tel: 0892 41555.	Heswall. Thornguard Computer Systems, 46 Pensby Road. Tel: 051-342 7516. Liverpool. Hargreaves, 31-37 Warbreck Moor, Walton. Tel: 051-525 1782. Liverpool. Laskys, Dale Street. Tel: 051-236 3298. Liverpool. Laskys, St. Johns Precinct. Tel: 051-708 5871. St. Helens. Microman Computers, Rainford Industrial Estate, Mill Lane Rainford. Tel: 0744 885242. Southport. Central Studios, 38 Eastbank Street. Tel: 0704 31881.	Woking. Harpers, 71-73 Commercial Way. Tel: 0486 225657.
BEDFORDSHIRE	DORSET	LANCASHIRE	MIDDLESEX	SUSSEX
Bedford. Boots, The Harpur Centre, Harpur Street. Tel: 0234 56231. Dunstable. Dormans, 7-11 Broad Walk. Tel: 0582 38302. Leighton Buzzard. Datasine, 59 North Street. Tel: 0525 374200. Leighton Buzzard. Milton Keynes Music & Computers, 17 Bridge Street. Tel: 0525 382504. Luton. Hobbyte, Unit 16, The Arndale Centre. Tel: 0582 457195. Luton. Laskys, 190-192 Arndale Centre. Tel: 0582 38302. Luton. Terry More, 49 George Street. Tel: 0582 23391.	Bournemouth. Brook Computers, 370 Charnminster Road. Tel: 0202 533054. Bournemouth. Lansdowne Computer Centre, 1 Lansdowne Crescent, Lansdowne. Tel: 0202 20165. Dorchester. The Paper Shop, Kings Road. Tel: 0305 64564. Poole. Lansdowne Computer Centre, 14 Arndale Centre. Tel: 0202 670901.	Blackburn. Tempo Computers, 9 Railway Road. Tel: 0254 691333. Blackpool. Blackpool Computer Store, 179 Church Street. Tel: 0253 20239. Burnley. IMO Business Systems, 39-43 Standish Street. Tel: 0282 54299. Preston. 4Mat Computing, 67 Friargate. Tel: 0772 561952. Preston. Laskys, 1-4 Guildhall Arcade. Tel: 0772 24558. Wigan. Wildings Computer Centre, 11 Mesnes Street. Tel: 0942 22382.	Enfield. Laskys, 44-48 Palace Garden Shopping Centre. Tel: 01-363 6627. Harrow. Camera Arts, 42 St. Anns Road. Tel: 01-427 5469. Harrow. Harrow Micro, 24 Springfield Road. Tel: 01-427 0098. Hounslow. Boots, 193-199 High Street. Tel: 01-570 0156. Southall. Twillstar Computers Ltd, 7 Regina Road. Tel: 01-574 5271. Teddington. Andrews, Broad Street. Tel: 01-997 4716. Twickenham. Twickenham Computer Centre, 72 Heath Road. Tel: 01-892 7896. Uxbridge. JKL Computers, 7 Windsor Street. Tel: 0895 51815.	Bexhill-on-Sea. Computerware, 22 St. Leonards Road. Tel: 0424 223340. Brighton. Boots, 129 North Street. Tel: 0273 27088. Brighton. Gamer, 71 East Street. Tel: 0273 728681. Brighton. Laskys, 151-152 Western Road. Tel: 0273 725625. Crawley. Gatwick Computers, 62 The Boulevard. Tel: 0293 37842. Crawley. Laskys, 6-8 Queensway. Tel: 0293 544622. Eastbourne. Boots, 15 Eastbourne Arndale Centre. Tel:
BERKSHIRE	ESSEX	LEICESTERSHIRE	NORFOLK	NOTTINGHAMSHIRE
Reading. Laskys, 118-119 Prior St. Tel: 0734 595459. Slough. Data Supplies, Templewood Lane, Farnham Common. Tel: 2 820004. Slough. Laskys, 75 Queensmere Centre. Tel: 0753 78269. Slough. MV Games, 245 High Street. Tel: 75 21594.	Basildon. Basilidon Software Centre, 78-80 Liberty Shopping Hall, East Square. Tel: 0268 27922. Chelmsford. Maxton Hayman, 5 Broomfield Road. Tel: 0245 354595. Chelmsford. Way In Computers, 7 Village Square, Chelmer Village. Tel: 0245 467858. Colchester. Boots, 5-6 Lion Walk. Tel: 0206 577303. Grays. H. Reynolds, 28a Southend Road. Tel: 0375 31641. Harlow. Harlow Computer Centre, 17 Staple Tye. Tel: 0279 22846. Harlow. Laskys, 19 The Harvey Centre. Tel: 0279 443495. Hornchurch. Compitel Computer Systems, 112a North Street. Tel: 0402 446741. Ilford. Boots, 177-185 High Road. Tel: 01-553 2116. Romford. Software Plus, 72 North Street. Tel: 70 65271. Southend-on-Sea. Computarama, 88 London Road. Tel: 0702 335443. Southend-on-Sea. Computer Centre, 336 London Road. Tel: 0702 337161. Southend-on-Sea. Estuary Personal Computers, 318 Chartwell North, Victoria Circus Shopping Centre. Tel: 0702 614131.	Leicester. Boots, 30-36 Gallowtree Gate. Tel: 0533 21641. Market Harborough. Harborough Home Computers, 7 Church Street. Tel: 0858 63056.	Norwich. Adams, 125-129 King Street. Tel: 0603 22129.	Sutton in Ashfield. HN & L Fisher, 87 Outram Street. Tel: 0623 54734. Nottingham. Laskys, 1-4 Smithy Row. Tel: 0602 413049.
BUCKINGHAMSHIRE	LONDON	OXFORDSHIRE	SCOTLAND	SURREY
Bletchley. RAMS Computer Centre, 117 Queensway. Tel: 0908 647744. Chesham. Reed Photo & Computers, 113 High Street. Tel: 0494 783373.	W1. Computers of Wignore Street, 104 Wignore Street. Tel: 01486 0373. W1. HMV, 363 Oxford Street. Tel: 01-629 1240. W1. Laskys, 42 Tottenham Court Road. Tel: 01-636 0845. W1. Lion House, 227 Tottenham Court Road. Tel: 01-637 1601. W1. Sonic Foto Micro Centre, 256 Tottenham Court Road. Tel: 01-580 5826. W1. Tomorrow's World Today, 27 Oxford Street. Tel: 01-439 7799. W1. Walters Computers, DH Evans, Oxford Street. Tel: 01-629 8800. WC1. Transam Micro Systems, 59-61 Theobalds Road. Tel: 01-405 5240. W8. Walters Computers, Barkers, Kensington High Street. Tel: 01-937 5432. SE7. Vic Odds Micros, 5 London Bridge Walk. Tel: 01-403 1988. SE9. Square Deal, 373-375 Footscray Road, New Eltham. Tel: 01-859 1516. Lewisham. Laskys, 164 High Street. Tel: 01-852 1375. SE15. Castlehurst Ltd, 152 Rye Lane, Peckham. Tel: 01-639 2205. EC2. Devron Computer Centre, 155 Moorgate. Tel: 01-638 3339. N14. Logic Sales, 19 The Bourne, The Broadway, Southgate. Tel: 01-882 4942. N22. Boots, 38-40 High Road, Wood Green. Tel: 01-881 0101. NW3. Maycraft Micros, 58 Rosslyn Hill, Hampstead. Tel: 01-431 1300. NW4. Davinci Computer Store, 112 Brent Street, Hendon. Tel: 01-202 2272. NW7. Computers Inc, 86 Golders Green. Tel: 01-209 0401. NW10. Technomatic, 17 Burnley Road, Wembley. Tel: 01-208 1177.	Abingdon. Ivor Fields Computers, 21 Stern Street. Tel: 0235 21207. Banbury. Computer Plus, 2 Church Lane. Tel: 0295 55890. Oxford. Absolute Sound & Video, 19 Old High Street, Headington. Tel: 0865 65661. Oxford. Science Studio, 7 Little Clarendon Street. Tel: 0865 54022.	Aberdeen. Boots, 133-141 Union Street. Tel: 0224 585349. Edinburgh. Boots, 101-103 Princes Street. Tel: 031-225 8331. Edinburgh. Laskys, 4 St. James Centre. Tel: 031-556 1864. Glasgow. Boots, 200 Sauchiehall Street. Tel: 041-332 1925. Glasgow. Boots, Union Street and Argyle Street. Tel: 041-248 7387. Glasgow. Tom Dixon Cameras, 15-17 Queen Street. Tel: 041-204 0826.	Birmingham. Boots, City Centre House, 16-17 New Street. Tel: 021-643 7582. Birmingham. Laskys, 19-21 Corporation Street. Tel: 021-632 6303. Dudley. Central Computers, 35 Churchill Precinct. Tel: 0384 238169. Stourbridge. Walters Computer Systems, 12 Hagley Road. Tel: 0384 370811. Walsall. New Horizon, 1 Goodall Street. Tel: 0922 24821. West Bromwich. DS Peakman, 7 Queens Square. Tel: 021-525 7910. Wolverhampton. Laskys, 2 Wulfrum Square. Tel: 0902 714568.
CAMBRIDGESHIRE	GLOUCESTER	HAMPSHIRE	SHROPSHIRE	STAFFORDSHIRE
Cambridge. Boots, 65-67 Sidney Street and 28 Petty Curry Street. Tel: 0223 350213. Cambridge. Cambridge Computer Store, 4 Emmanuel Street. Tel: 0223 582624. Cambridge. Heffers Stationers, 19 Sidney Street. Tel: 0223 358241. Peterborough. Boots, 40-42 Bridge Street, Queensgate. Tel: 0733 65352.	Cheltenham. Laskys, 206 High Street. Tel: 0242 570282. Cheltenham. Screen Scene, 144 St. Georges Road. Tel: 0242 528979. Gloucester. Boots, 38-46 Eastgate Street. Tel: 0452 423501.	Basingstoke. Fishers, 2-3 Market Place. Tel: 0256 22079. Southampton. Business Electronics, Micromagic At Atkins, 7 Civic Centre Road. Tel: 0703 25903. Waterloo. GB Microland, 7 Queens Parade, London Road. Tel: 0705 259911.	Shrewsbury. Clairmont Enterprises, Hills Lane. Tel: 3647 52949. Shrewsbury. Computarama, 13 Castlegate. Tel: 0743 60528. Telford. Computer Village Ltd, 2/3 Hazeldine House, Central Square. Tel: 0952 506771. Telford. Telford Electronics, 38 Mall 4. Tel: 0952 504911.	Newcastle-under-Lyme. Computer Cabin, 24 The Parade, Silverdale. Tel: 0782 636911. Stafford. Computarama, 59 Foregate Street. Tel: 0785 41899. Stoke-on-Trent. Computarama, 11 Market Square Arcade, Hanley. Tel: 0782 268524.
CAMBRIDGESHIRE	HERTFORD	HAMPSHIRE	SUFFOLK	SURREY
Cambridge. Boots, 65-67 Sidney Street and 28 Petty Curry Street. Tel: 0223 350213. Cambridge. Cambridge Computer Store, 4 Emmanuel Street. Tel: 0223 582624. Cambridge. Heffers Stationers, 19 Sidney Street. Tel: 0223 358241. Peterborough. Boots, 40-42 Bridge Street, Queensgate. Tel: 0733 65352.	Hitchin. County Computers, 13 Bucklesbury. Tel: 0462 36757. Potters Bar. the Computer Shop, 107 High Street. Tel: 0707 44417. Stevenage. DJ Computers, 11 Town Square. Tel: 0438 65501. Watford. Laskys, 18 Charter Place. Tel: 0923 31905. Watford. SRS Microsystems, 94 The Parade, High Street. Tel: 0923 26602. Watford. Watford Electronics, Cardiff Road. Tel: 0923 405588. Welwyn Garden City. DJ Computers, 40 Fretherne Road. Tel: 96 28444.	Basingstoke. Fishers, 2-3 Market Place. Tel: 0256 22079. Southampton. Business Electronics, Micromagic At Atkins, 7 Civic Centre Road. Tel: 0703 25903. Waterloo. GB Microland, 7 Queens Parade, London Road. Tel: 0705 259911.	Bury St. Edmunds. Boots, 11-13 Cornhill. Tel: 0284 701516. Bury St. Edmunds. The Computer Centre, 1-3 Garland Street. Tel: 0284 705503. Ipswich. Brainwave Micros, 24 Crown Street. Tel: 047 350965.	Bagshot. P & H Electronics, 22-24 Guildford Road. Tel: 0276 73078. Croydon. Laskys, 77-81 North End. Tel: 01-681 8443. Croydon. The Vision Store, 53-59 High Street. Tel: 01-686 6362. Croydon. The Vision Store, 96-98 North End. Tel: 01-681 7539. South Croydon. Concise Computer Consultants, 1 Carlton Road. Tel: 01-681 6842. Epsom. The Micro Workshop, 12 Station Approach. Tel: 0372 721533. Guildford. Walters Computers, Army & Navy, 105-111 High Street. Tel: 0483 68171. Wallington. Surrey Micro Systems, 53 Woodcote Road. Tel: 01-647 5636.
CLEVELAND	HUMBERSIDE	KENT	LANCASHIRE	MIDDLESEX
Middlesbrough. Boots, 88-90 Linthorpe Road, The Cleveland Centre. Tel: 0642 249616.	Beverly. Computing World, 10 Swaby's Yard, Dyer Lane. Tel: 0482 881831.	Ashford. DGH, 10 North Street. Tel: 0233 32597. Ashford. Geerings of Ashford, 80 High Street. Tel: 0233 33366. Bexleyheath. Laskys, 15-16 Broadway Shopping Centre. Tel: 01-301 3478. Bromley. Boots, 148-154 High Street. Tel: 01-460 6688. Bromley. Computers Today, 31 Market Square. Tel: 01-290 5652. Bromley. Laskys, 22 Market Square. Tel: 01-464 7829. Bromley. Walters Computers, Army & Navy, 64 High Street. Tel: 01-460 9991. Chatham. Boots, 30-34 Wilmott Square, Pentagon Centre.	Blackburn. Tempo Computers, 9 Railway Road. Tel: 0254 691333. Blackpool. Blackpool Computer Store, 179 Church Street. Tel: 0253 20239. Burnley. IMO Business Systems, 39-43 Standish Street. Tel: 0282 54299. Preston. 4Mat Computing, 67 Friargate. Tel: 0772 561952. Preston. Laskys, 1-4 Guildhall Arcade. Tel: 0772 24558. Wigan. Wildings Computer Centre, 11 Mesnes Street. Tel: 0942 22382.	Enfield. Laskys, 44-48 Palace Garden Shopping Centre. Tel: 01-363 6627. Harrow. Camera Arts, 42 St. Anns Road. Tel: 01-427 5469. Harrow. Harrow Micro, 24 Springfield Road. Tel: 01-427 0098. Hounslow. Boots, 193-199 High Street. Tel: 01-570 0156. Southall. Twillstar Computers Ltd, 7 Regina Road. Tel: 01-574 5271. Teddington. Andrews, Broad Street. Tel: 01-997 4716. Twickenham. Twickenham Computer Centre, 72 Heath Road. Tel: 01-892 7896. Uxbridge. JKL Computers, 7 Windsor Street. Tel: 0895 51815.
CUMBRIA	KENT	LANCASHIRE	MIDDLESEX	SUSSEX
Kendal. The Kendal Computer Centre, Stramontgate. Tel: 0539 22559. Penrith. Penrith Communications, 14 Castlegate. Tel: 0768 67146. Whitehaven. P D Hendren, 15 King Street. Tel: 0946 2063. Workington. Technology Store, 12 Finkle Street. Tel: 0900 66972.	Ashford. DGH, 10 North Street. Tel: 0233 32597. Ashford. Geerings of Ashford, 80 High Street. Tel: 0233 33366. Bexleyheath. Laskys, 15-16 Broadway Shopping Centre. Tel: 01-301 3478. Bromley. Boots, 148-154 High Street. Tel: 01-460 6688. Bromley. Computers Today, 31 Market Square. Tel: 01-290 5652. Bromley. Laskys, 22 Market Square. Tel: 01-464 7829. Bromley. Walters Computers, Army & Navy, 64 High Street. Tel: 01-460 9991. Chatham. Boots, 30-34 Wilmott Square, Pentagon Centre.	Blackburn. Tempo Computers, 9 Railway Road. Tel: 0254 691333. Blackpool. Blackpool Computer Store, 179 Church Street. Tel: 0253 20239. Burnley. IMO Business Systems, 39-43 Standish Street. Tel: 0282 54299. Preston. 4Mat Computing, 67 Friargate. Tel: 0772 561952. Preston. Laskys, 1-4 Guildhall Arcade. Tel: 0772 24558. Wigan. Wildings Computer Centre, 11 Mesnes Street. Tel: 0942 22382.	Enfield. Laskys, 44-48 Palace Garden Shopping Centre. Tel: 01-363 6627. Harrow. Camera Arts, 42 St. Anns Road. Tel: 01-427 5469. Harrow. Harrow Micro, 24 Springfield Road. Tel: 01-427 0098. Hounslow. Boots, 193-199 High Street. Tel: 01-570 0156. Southall. Twillstar Computers Ltd, 7 Regina Road. Tel: 01-574 5271. Teddington. Andrews, Broad Street. Tel: 01-997 4716. Twickenham. Twickenham Computer Centre, 72 Heath Road. Tel: 01-892 7896. Uxbridge. JKL Computers, 7 Windsor Street. Tel: 0895 51815.	Bexhill-on-Sea. Computerware, 22 St. Leonards Road. Tel: 0424 223340. Brighton. Boots, 129 North Street. Tel: 0273 27088. Brighton. Gamer, 71 East Street. Tel: 0273 728681. Brighton. Laskys, 151-152 Western Road. Tel: 0273 725625. Crawley. Gatwick Computers, 62 The Boulevard. Tel: 0293 37842. Crawley. Laskys, 6-8 Queensway. Tel: 0293 544622. Eastbourne. Boots, 15 Eastbourne Arndale Centre. Tel:
DERBYSHIRE	KENT	LANCASHIRE	MIDDLESEX	SUSSEX
Alfreton. Gordon Harwood, 67-71 High Street. Tel: 0733 836781. Chesterfield. Boots, 35-37 Low Pavement, Market Place. Tel: 0246 203591. Chesterfield. Computer Stores, 14 Stephenson Place. Tel: 0246 208802. Derby. Boots, 1 Devonshire Walk. Tel: 0322 45886.	Ashford. DGH, 10 North Street. Tel: 0233 32597. Ashford. Geerings of Ashford, 80 High Street. Tel: 0233 33366. Bexleyheath. Laskys, 15-16 Broadway Shopping Centre. Tel: 01-301 3478. Bromley. Boots, 148-154 High Street. Tel: 01-460 6688. Bromley. Computers Today, 31 Market Square. Tel: 01-290 5652. Bromley. Laskys, 22 Market Square. Tel: 01-464 7829. Bromley. Walters Computers, Army & Navy, 64 High Street. Tel: 01-460 9991. Chatham. Boots, 30-34 Wilmott Square, Pentagon Centre.	Blackburn. Tempo Computers, 9 Railway Road. Tel: 0254 691333. Blackpool. Blackpool Computer Store, 179 Church Street. Tel: 0253 20239. Burnley. IMO Business Systems, 39-43 Standish Street. Tel: 0282 54299. Preston. 4Mat Computing, 67 Friargate. Tel: 0772 561952. Preston. Laskys, 1-4 Guildhall Arcade. Tel: 0772 24558. Wigan. Wildings Computer Centre, 11 Mesnes Street. Tel: 0942 22382.	Enfield. Laskys, 44-48 Palace Garden Shopping Centre. Tel: 01-363 6627. Harrow. Camera Arts, 42 St. Anns Road. Tel: 01-427 5469. Harrow. Harrow Micro, 24 Springfield Road. Tel: 01-427 0098. Hounslow. Boots, 193-199 High Street. Tel: 01-570 0156. Southall. Twillstar Computers Ltd, 7 Regina Road. Tel: 01-574 5271. Teddington. Andrews, Broad Street. Tel: 01-997 4716. Twickenham. Twickenham Computer Centre, 72 Heath Road. Tel: 01-892 7896. Uxbridge. JKL Computers, 7 Windsor Street. Tel: 0895 51815.	Bexhill-on-Sea. Computerware, 22 St. Leonards Road. Tel: 0424 223340. Brighton. Boots, 129 North Street. Tel: 0273 27088. Brighton. Gamer, 71 East Street. Tel: 0273 728681. Brighton. Laskys, 151-152 Western Road. Tel: 0273 725625. Crawley. Gatwick Computers, 62 The Boulevard. Tel: 0293 37842. Crawley. Laskys, 6-8 Queensway. Tel: 0293 544622. Eastbourne. Boots, 15 Eastbourne Arndale Centre. Tel:



TECHNOMATIC

BBC Computer & Econet Referral Centre

17 Burnley Road, London NW10 1ED Tel: 01-208 1177

305 Edgware Road, London W2 Tel: 01-723 0233

Please add carriage: (a) £8; (b) £2.50; (c) £1.50; (d) £1 and 15% VAT to order value

APRIL '85

ACORN COMPUTER SYSTEMS

BBC Model B.....	£300(a)
BBC Model B + DFS.....	£346(a)
BBC Model B + Econet.....	£335(a)
BBC Model B + Econet + DFS.....	£399(a)
ACORN 10Mbyte Hard Disc.....	£1300(a)
BBC Dust Cover.....	£4(d)
BBC Carrying Case.....	£12.50(b)

UPGRADE KITS

A to B.....	£65 (d)	Installation.....	£20
ACORN DFS Kit.....	£95 (d)	Installation.....	£15
Econet Kit.....	£55 (d)	Installation.....	£25
Speech Kit.....	£47 (d)	Installation.....	£15
BASIC II Rom with user guide.....			£22.50
1.2 O/S Rom.....	£7.50	DNFS Rom.....	£17.50
4816AP Memory upgrade RAM (each).....			£2.00

ECONET ACCESSORIES

Terminator (Two reqd per installation).....	£31 (c)
Clock with psu.....	£39 (c)
Printer Server Rom.....	£41 (c)
File Server Level I.....	£86 (c)
File Server Level II.....	£216(c)
File Server Level III.....	£300(c)
10 Station Lead Set.....	£26 (c)
Extra Econet cable.....	£1.50/m (d)
Econet User Guide.....	£10 (d)

ACORN BITSTICK

The renowned 'BITSTICK' graphic CAD package. Using the on screen menu and colour palette, it can draw freehand as well as lines and shapes with great accuracy. Any part of a drawing may be magnified many times, and up to 48 drawings may be saved on a disc. In total, a friendly yet sophisticated CAD system offering tremendous value. **£325(a)**
FX80 dump routine available. **£35**

Multi-Plotter Driver (Plotters include H.P., Epson HI-80, Watanabe, etc) **£79(c)**

ACORN Z80 2nd Processor

This processor converts your BBC into a complete business micro with all the computing power a professional would need. The system is CP/M based and is supplied with free software package. The package includes three office productivity programs, (memoplan, fileplan and graphplan), Systems generator program, three programming languages plus the ACCOUNTANT business program. Software is accompanied by extensive manuals that not only get you started but also answers your whys and hows. **All for only £348 (a)**

See our section on CP/M software for other packages available for use with this processor.

ACORN 6502 2nd Processor

This processor is designed for the serious computer user who wants to get even more out of his computer. This processor provides increased memory — allowing up to 44K for Basic programs and up to 60K for assembly language programs, regardless of screen mode in use. (ideal for VIEW). An increase in speed means that programs run up to 50% faster. The second processor/BBC combination offer computing power comparable to systems costing twice as much. **£175(a)**

ACORN P-SYSTEM

The long-awaited-for portable operating system has arrived. Intended for use with the 6502 Second processor, this portable operating system is a complete implementation and comes complete with a Filer, Editor, and compilers for two languages, USCD PASCAL and FORTRAN-77. Widely used in universities and colleges, as well as being popular with business software authors, P-System is user-friendly, offering ease of program development as well as portability. **£263(b)**

TECHNO-LINE
IS NOW
ON-LINE!
Tel: 01-452 1500

We are pleased to announce the launch of our on-line information system. Pages available will include:

- * New Products
- * Comment Box
- * Technical Pages
- * Comments on Stock and availability of Products
- * Placing of Orders and many others...

Techno-Line 01-452 1500
Weekdays. 18.30 to 09.30
Sunday. 24 hours

Technical Information: Automatic V21/V23 for both 300/300 and 1200/75 Baud. Standard Viewdata/Prestel Protocols.

ACORN WINCHESTER DRIVES

Acorn Hard discs are now available in 10 Mbyte and 30 Mbyte versions. The drive plugs into the 1 MHz bus. The ADFS filing system with its hierarchical filing structure provides an excellent file management facilities. Data is transferred at a rate of 1 Mbit/sec and the 'seek time' is 85 ms. Full details on request.


10 Mbyte Winchester Drive **£1300(a)**

30 Mbyte Winchester Drive **£1999(a)**

Acorn File Server Level 3: This enhanced file server allows more users on the network with better user access. **£300(b)**
If purchased with a Winchester Drive **£200(b)**

TORCH UNICORN PRODUCTS

The TORCH Unicorn system has been in the field for over two years and is now a proven Z80 system for the BBC. It gives you the potential to expand which no other system can currently offer. You can expand a single system with a 20Mb Hard Disc, have the processing power of a 32bit 68000 cpu with up to 1Mbyte of RAM and a Single/Multi-user UNIX operating System or set up a network. All these capabilities are available now. Probably the most popular upgrade is the TORCH Z80 PACK, offering an attractive 2 x 400K disc drive, a Z80 second processor with 64K RAM, and a CP/M compatible operating system. A free bonus is the easy-to-use, yet advanced PERFECT range of software including a word-processor, speller, spreadsheet and database. Z80 BBC BASIC is also included. **£650(a)**



TORCH GRADUATE SYSTEM

The ultimate upgrade — converts your BBC into a powerful 16 Bit business computer and makes it disc and hardware compatible with the IBM PC. With 256K RAM and single/dual drives, it simply connects through the 1MHz bus. (The disc drives can be used in both BBC and IBM mode, without requiring a disc interface.) The top-of-the-range Model G800/2 comes complete with the free Xchange range of software, and includes a full-feature word processor, a financial planner, a database and a business graphics package — all 'linkable'.

(This highly acclaimed software is now available for the IBM PC at a cost of over £400!)

G800/2: **£945(a)**

Z80 Card ZEP100 with PERFECT Software Packages

+ Z80 Basic..... **£275 (a)**

Z80 Disc Pack ZDP240 with software as above..... **£650 (a)**

20Mb Hard Disc + 1 x 400K Floppy Drive..... **£1,950 (a)**

Unicorn 68000, Unix OS/Z80B/512K, 20MB

Hard Disc, 400K Floppy..... **£3495 (a)**

PRINTERS

ALL PRINTERS HAVE A 12 MONTH GUARANTEE

DOT MATRIX

KAGA TAXAN:

- * Epson Compatible Control codes
- * 80 or 156 Column
- * NEAR LETTER QUALITY Print using 23 x 18 matrix
- * Text Modes include Normal, Italic, Enlarged, Condensed, Super/Sub Script, Proportional
- * Dot Addressable graphics in various modes
- * 3K buffer which can also hold user defined characters
- * Extra ROM/RAM socket for custom print fonts
- * Friction & Tractor feed with built in paper roll holder

KP810 (80 column) £255 (a)
KP910 (156 column) £359 (a)

EPSON:

The industry standard printer offering the quality, reliability and versatility.

RX80T £215 (a) RX80FT £225 (a)
RX100 £345 (a) FX80 £315 (a) FX100 £435 (a)

DAISY WHEEL

BROTHER HR15: * 14 cps * 3K Buffer * Two colour printing * Proportional spacing * Underline * * Bold * Shadow print * Super/Sub script * many other features.

BROTHER HR15 £325(a)

JUKI 6100: * 15 cps * 2K Buffer * Switchable 10/12/15 cpi * Proportional printing * Linear Motor for max reliability.

JUKI 6100 £325(a)

ACORN VIEW PRINTER DRIVER GENERATOR

As well as coming with pre-defined drivers for printers including EPSON FX80, JUKI6100 etc, this generator enables you, by answering a few simple questions, to generate your own dedicated driver for almost any printer. The days of having to buy individual dedicated printer drivers are gone! **£10(d)**

EPSON HI-80 PLOTTER


NEW

This new A4 size Epson plotter has many features and commands not present on plotters costing far more. Features include: 4 pens at same time — up to 10 colours, various types of pens, high plotting speed, can produce text in normal way as well as user defined characters, text can combine with graphics etc., **£399(a)** ROMs available to make H1-80 operate with HP control codes.

GRAPHICS PLOTTER/WORK STATION

Equally at home in the artists studio, hobbyists workshop, science lab or a classroom, this system has something to offer for everyone. The 3 colour graphics plotter provides both precision and versatility. The carriage can be moved with an accuracy of 0.025cm over an A4 area — the plotter being able to accept paper and far thicker materials at sizes of up to A3. The basic plotter carries 3 colour pens each of which is software selectable. Additional accessories greatly enhance the versatility of the unit without losing the accuracy. The servo controlled drill/router, and scribe can be used on various materials. A unique Opto Sensor (using a Hewlett Packard device) turns the plotter into a high-res scanning digitiser to read & store whole diagrams and photographs. Workstation comes complete all accessories.

Workstation Complete £490(a)

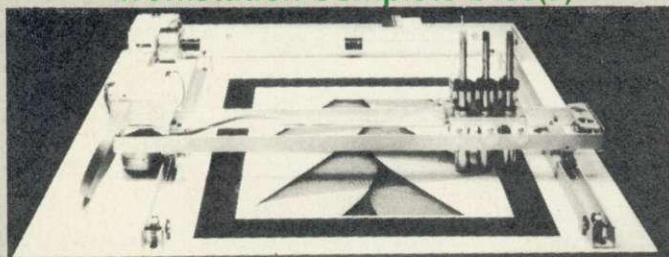

Basic Plotter £270(a)

Opto Sensor £72(c) Drill/Router Attachment £79(c)
Power Supply: PS12V £42(c) PS24V £78(c)
Scandump Utility Disc £14.95 (d)

TECHNOMATIC

All prices exclude VAT

PRINTER ACCESSORIES

EPSON

32K Internal Buffer Parallel £99(b) **NEW**
 Paper Roll Holder **£17(d)** FX80 Tractor Attachment **£37(c)**.
 Interfaces: 8143 RS232 **£28(c)**; 8148 RS232 + 2K **£57(c)**;
 8132 Apple II **£60(c)**; 8165 IEEE + Cable **£65(c)**.
 Serial & Parallel Interfaces with larger buffers available.
 Ribbons: RX/FX/MX80 **£5.00(d)**; RX/FX/MX 100 **£10(d)**;
 FX80 Dustcover **£4.50(d)**

KAGA TAXAN: RS 232 Interface + 2K buffer **£78(c)**; Ribbon KP810/910 **£6(d)**

JUKI: RS232 Interface **£65(c)**; Spare Daisy Wheel **£14(d)**; Ribbon **£2.50(d)**;
 Sheet Feeder **£129(a)** Tractor Feed Attach **£129(a)**

BROTHER HR15: Sheet Feeder **£189(a)** Ribbons Carbon or Nylon **£4.50(a)**

BBC Printer Lead: Parallel (42") **£7(d)**; Serial **£7(d)**
 Printer Leads can be supplied to any other length.


Plain Fanfold Paper with extra fine perforation (Clean Edge):
 2000 sheets 9.5" x 11" **£13(b)** 2000 sheets 14.5" x 11" **£18.50(b)**
 Labels per 1000s: Single Row 3 1/2" x 1 7/16" **£5.25(d)**
 Triple Row 2 7/16" x 1 7/16" **£5.00(d)**

PRINTER SHARER/BUFFER

A unique sharer/buffer that provides a simple solution to improve system utilisation. It can be connected to up to three computers and it will automatically switch between the computers to scan for data — no manual switching required. High speed data input rate to the buffer cuts down the normal waiting time for the computers for the printing operation to complete and thus allowing the computers to be used for other uses. In networked systems it can eliminate the printer server unit. The 64K buffer would hold over 30 A4 pages of text.

Facilities include: COPY, PAUSE AND RESET. LED indication for percentage of memory available and data source. Mains powered. Send for detailed specification.

TSB 64 Buffer/Sharer £245(a)
Cable Set £30

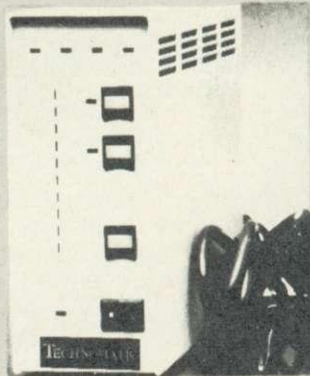

PERIPHERAL & COMPUTER SHARERS

We now offer an extended range of peripheral sharers to allow the user to switch between computers, printers and modems. High quality switching mechanisms housed in fully shielded metal cases ensure reliability. No power required.

Three Computers to one centronics printer (all 36 lines switched) **£65(b)**
 Four Computers to one centronics printer (all 36 lines switched) **£79(b)**
 Three Computers to one serial printer/modem (all 25 lines switched) **£59(b)**
 Four Computers to one serial printer/modem **£69(b)**
 BBC Cable Sets 3 way **£22(c)** 4 way **£27.50(c)**

Computer Sharer:

Allows one computer to be connected to two parallel printers fitted with cable for the BBC computer **£19.50(b)**.

GRAFPAD

A low cost graphic tablet offering the performance & durability required by industrial and educational users. It is compact, accurate & reliable; working area 240 x 192mm + menu area. Comes complete with a CAD package. **£110(b)**.

01-208 1177

Please add carriage: (a) £8; (b) £2.50; (c) £1.50; (d) £1 and VAT at 15% to order. Carriage (a) sent by Datapost

MONITORS

All monitors supplied with BBC lead

MICROVITEC

All 14" monitors now available in plastic or metal cases, please specify your requirement.

14" RGB		with PAL & Audio	
1431 Std Res	£165(a)	1431 AP Std Res	£210(a)
1451 Med Res	£240(a)	1451 AP Med Res	£280(a)
1441 Hi Res	£399(a)	These monitors can receive TV programs thru a Video Recorder	

20" RGB with PAL & Audio

2030CS Std Res	£380(a)	2040CS Hi Res	£685(a)
----------------	---------	---------------	---------

KAGA TAXAN 12" RGB

VISION II Hi Res	£235(a)	VISION III Super Hi Res	£340(a)
SANYO CD3125NB 14" RGB Std Res	£179(a)		

MONOCHROME MONITORS:

SANYO DM8112CX Hi Res 12" Green Screen	£90(a)
KAGA KX1201G Hi Res 12" Etched Green Screen	£99(a)
KAGA KX1202A Hi Res 12" Etched Amber Screen	£105(a)
ZENITH 123 Hi Res 12" Green Screen	£68(a)
ZENITH 122 Hi Res 12" Amber Screen	£68(a)
Swivel Base for Kaga Monochrome fitted with Digital Clock	£21(c)
Monitor Plinth for the BBC	£13.50(b)
Double Tier Plinth for BBC and flat pack dual drive	£19.50(b)
BBC Leads Kaga RGB £5(d) Microvitec £3.50(d) Monochrome £3.50(d)	

RB2 TRACKER BALL




Marconi with its years of experience making tracker balls for use in Military and Air Traffic Control have developed a quality device for the serious hobbyist, for educational uses, and for low cost CAD/CAM applications. RB2 is a compact, ergonomically designed tracker ball that provides precise positional control and rapid direction changing using a freely rotating resin ball in any direction without the limiting stops or the zero point drift of joystick controls. Three switch

buttons enable easy software manipulation to incorporate the use of the tracker ball. Appropriate software will enable the RB2 to take over the functions of cursor keys in word processing, CAD/CAM applications and two dimensional positional controls of robots, drillheads etc. RB2 which plugs into the user port is supplied with utility programme to use it as a joystick with other software, a comprehensive graphics/CAD program and a program demonstrating its editing capabilities. User guide includes instructions on writing your own programs for the RB2. £52(b)

AMX MOUSE - As seen on the BBC TV Micro program

In conjunction with a controlling ROM this sophisticated mouse has many advanced features such as Icons, Windows etc., these can be used in ordinary programs as well as sophisticated CAD Design. The supplied 'AMX ART' is a superb, yet simple-to-use CAD package allowing the creation of amazing graphical designs. A screendump for drawings is included. It can also be used with Wordwise/View to replace the cursor keys. Supplied complete with CAD Package, ROM and full instruction manual. £75(b)

DISC DRIVES

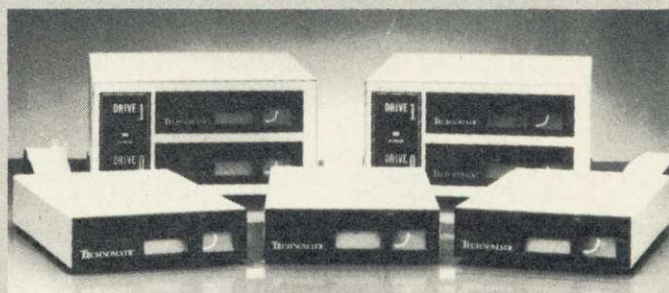

TECHNOMATIC disc drives come fitted with high quality slimline Japanese mechanisms and represent the state of art in disc drive technology. They are built to highest standards and are all tested to their full performance capability before packaging. Single drives are offered with or without integral power supply whilst the dual drives are supplied with generously rated switch mode power supply. Attractively designed steel casings are painted in hard wearing BBC matching paint. All drives can operate in single and double density modes. Drives are supplied with cables, manual and formatting disc and are ready to be fitted to the computer.

Single Drives

1 x 100K 40T SS	: TS55A £100(b);	CS55A with psu	£125(b)
1 x 200K 40/80T SS		CS55E with psu	£150(b)
1 x 200K 40T DS	£115(a)		
1 x 400K 40/80T DS	: TS55F £125(a);	CS55F with psu	£169(b)

Dual Drives

2 x 100K 40T SS	: TD55A with psu	£250(a)
2 x 400K 40/80T DS	: TD55M with psu	£310(a)
2 x 400K 40/80T DS	: TD55MP in flat pack with built-in plinth	£325(a)

DISC DRIVE MULTIPLEXER

A simple device that enables up to four computers to be connected to one single or dual drive. Ideal unit for installing in classrooms where networking is not planned or necessary or the costs have to be kept low or where software information is shared. Several of these units can be installed in series to connect more computers to access the same discs. Units supplied with 5' of cable per outlet as standard. Mains powered.

TDM 4 Quad Unit (upto 4 computers) £135(a)

TDM 2 Dual Unit (2 computers) £75(b)

Note: All computers must be fitted with a DFS

3M FLOPPY DISCS

Authorised Distributor
Data Recording Products



Industry standard high quality discs with guaranteed error free performance for life.

Discs in packs of 10:

40T SSDD £15(c)	40 T DSDD £18(c)
80 T SSDD £22(c)	80 T DSDD £24(c)

DISC ACCESSORIES

Single Disc Cable £6(d)	Dual Disc Cable £8.50(d)
10 Disc Library Case £1.80(d)	30 Disc Case £6.00(c)
Lockable Storage Boxes 40 Discs	£14(c) 100 Discs £19(c)

The FLOPPICLENE disc head cleaning kit is the ideal way to ensure the optimum performance of your drives. The use of disposable cleaning discs eliminate the risk of recontamination and abrasion of the sensitive disc heads and ensure continuously reliable data capture and transmission.

Floppiclene with 20 disposable cleaning discs. £14.50(b).

COMMUNICATIONS

MODEMS

ACORN PRESTEL: The official Acorn add-on — an advanced BT Approved, Auto-Dial, Prestel Terminal ideal for British Telecom Gold. Comprehensive software includes 'tagged' frames, downloading of Telesoftware, saving of frames, printing, sophisticated 'Mailbox' handling c/w editor. A built-in speaker allows line monitoring. A simple !BOOT file allows automatic operation **£99(b)**

BUZZ BOX A full spec, BT approved, pocket size, direct connect modem with both originate & answer modes, full & half duplex, allowing access to many databases, bulletin-boards as well as intercomputer communications. It conforms to CCITT V21 300/300 Baud Standard. Battery/mains powered **£62(c)** BBC Lead **£6** External PSU **£9(c)**

MINOR MIRACLES WS2000 A world standard modem, having BT approval, covering V21, V23, BELL 103/113/108 and including 75,300,600,1200 Baud ratings. (It even includes 'reverse Prestel!'). This is the modem that will cover 'Prestel' type systems as well as Bulletin Boards both in the UK and abroad. What possibly gives this modem its biggest advantage is its option of computer control. A 25Way RS232 input as well as possible



computer controlled auto-dial/auto-answer makes this modem unique. WS2000 **£129(c)** BBC Serial Cable **£7**

WS2000 Auto-Dial card: includes an integral loudspeaker for monitoring of the phone line **£30(d)**. BBC User Port cable (for modem control) **£7**.

SKI KIT (Allowing total control of the modem by your computer) **£10**.

DS1 Disc (for Commstar): When used with the Auto-dial card, SK1 Kit, and a user port cable, this software will dial out to Prestel, enter your password etc. and leave you in Commstar. Will also store many bulletin board telephone numbers for autodialling **£10**.

WS2000 Auto-Answer Card £30(d).

(Please note that the A/D & A/A Cards are still awaiting BABT Approval.)

UNICOM A High Performance, yet low-cost Modem. Features include: Auto-dial & auto-answer, Auto baud rate scan, 75,300,1200 Baud rates with V21, V23 and Bell standards. Sophisticated software in ROM allow many features like: Auto-Dial, Redial, Remote facilities etc. An Auto-Dial disc allows storage of commonly dialled numbers. UNICOM **£49.95(b)** Unicom ROM **£20** Unicom Disc **£9.95** Unicom Cable **£6(d)** Not BT approved

TELEMOD-2 A BT approved modem complying with CCITT V23 1200/75 Duplex & 1200/1200 Half-Duplex standard, that allows communication with Viewdata services e.g. Prestel, Micronet etc., as well as using 1200 Baud for communicating with other computer users. Mains powered. TELEMOD 2 **£65(b)** BBC Lead **£7.00**

COMMSTAR An ideal communications Rom. Extremely easy to use, yet very versatile. It features both a Prestel mode as well as a Terminal mode, thus offering very good value for money. In Prestel mode, all normal Prestel features are available including, downloading of software, saving and retrieving of pages on disc, page tag, revealing of hidden text etc. Its terminal mode is ideal for bulletin boards etc. All input may be copied into a buffer in memory over which full control is available. Controls of protocols are very simple and any type of file, (not just ASCII) may be sent using XModem protocols. Even includes an elapsed time-clock. **£29(d)**

TERMI-II A good all round package for communicating with notice boards, electronic mail services etc. Termi is a semi-intelligent terminal emulator allowing the BBC to act as a dumb terminal, slave BBC graphics terminal; or VT52 terminal. The rates at which data is sent or received is easily set up with rates of up to 4800 Baud with 40/80 col. selectable. Allows files to be transmitted from disc, or a copy of incoming data to be sent to a file or to a printer. (Termi is not suitable for PRESTEL). **£28(d)**

COMMUNICATOR This is a full 80 col VT100 terminal emulation program on 16K eeprom. It is a more advanced program than TERMI and features easy to follow screen menus. The rate at which data is sent or received is easily set up with rates up to 19200 Baud with 80 column text. Allows files to be transmitted from disc, or a copy of incoming data to be sent to a file or to a printer. (Communicator is not suitable for PRESTEL). **£59(d)**

TECHNOMATIC

All prices exclude VAT

EPROMER II

This enhanced eeprom programmer will handle the full range of popular single rail eeproms. Its sophisticated menu driven software makes the programming of eeproms simple and efficient. Features included in this programmer are normally found in industrial grade programmers costing many times more.



- * Interfaces with the BBC through 1 Mhz bus. Fully buffered and complies with the ACORN protocols. Integral power supply ensures no power drain from the computer.
 - * All eeproms up to 16K programmable in single pass.
 - * User friendly software driven menu provides total control from the keyboard — no knobs to fiddle with.
 - * Selectable programming voltage — 25/21/12.5V.
 - * Defaults to normal programming — high speed algorithmic programming selectable.
 - * READ/BLANK CHECK/PROGRAM/VERIFY at any address or addresses.
 - * Constant display of all options selected.
 - * Full screen editor with HEX/ASCII input — Full TAPE/DISC filing facility.
 - * Data entry from the keyboard, disc/tape or another eeprom.
 - * Several BBC BASIC programs can be entered on one eeprom.
- EPROMER II with manual & cassette **£99(b)** Software on: Disc **£3** ROM Based software **£12.50** extra

UV ERASERS

UVT1T Eraser with built-in timer and mains indicator. Built-in safety interlock to avoid accidental exposure to the harmful UV rays. It can handle up to 5 eeproms at a time with an average erasing time of about 20 mins. **£59(b)**.

UV1T as above but without the timer. **£47(b)**.

For Industrial Users, we offer UV140 and UV141 erasers with handling capacity of 14 eeproms. UV141 has a built in timer. Both offer full built in safety features UV140 **£61**; UV141 **£79(b)**.

SMARTMOUTH

The original 'Infinite Speech' Synthesiser — Still the best around!! A ready built, self contained speech synthesiser unit, attractively packaged with built in speaker. Tailored frequency response audio stages for optimum sound quality. Any word can be easily created — very economical with memory. Plugs into the user port — no roms required. Demo and development programs supplied on cassette (easily transferred to disc) **£31(c)**

'TIME-WARP' REAL-TIME CLOCK CALENDER

We have broken the price barrier! A low cost unit, allowing the facilities of units costing far more. Built to professional standards, it opens up the total spectrum of Real-Time applications. Possibilities include desk diary/planner, calendar, continuous display of on-screen time and date information, automatic document dating, precise timing and control in scientific applications — its uses are endless. Simply plugs into the user port — battery backup is supplied as standard. A full manual as well as Extensive software on cassette (easily transferred to disc) — no ROMs needed. **£29(c)**



RAMROM-15

The advanced sideways ROM/RAM expansion system. This is an external unit, using high quality construction, attractively packaged in a BBC coloured metal case, allowing easy access to all the sockets. (Allows other units to be fitted inside the BBC). Absolutely no soldering is required. Allows 11/12 additional sideways ROMs to be fitted with an option of up to 16K sideways RAM. All commonly available RAM can be used i.e. 4801/6116/6264 or xx128. All the hardware to take the RAM is already fitted e.g. battery backup. For development work and further expansion, most of the 6502 processor signals are available. Supplied with utility disc and full instruction manual. **£112(b)**

01-208 1177

Please add carriage: (a) £8; (b) £2.50; (c) £1.50; (d) £1 and VAT at 15% to order. Carriage (a) sent by Datapost

ATPL SIDEWISE ROM EXPANSION BOARD

This is a well constructed expansion board, that does not require soldering in its installation. All buses are buffered. It allows full sideways Rom expansion to a total of 16 ROMs. One socket has been split into two 8K sockets to allow the use of 8K byte CMOS RAM chips, giving a total of 16K sideways RAM. This is ideal for sideways rom development, and will also allow downloading of software from cassette or disc. The battery backup option will allow retention of data in the RAM, when power to the computer is removed. Several link-selectable options include the choice of type of Eprom, and a 'write-protect' for the RAM option. £39(d) Back-up Kit £18.

ACORN IEEE INTERFACE

This interface enables a BBC computer to control any scientific and technical equipment that conforms to the IEEE488 standard, at a lower price than other systems, but without sacrificing any aspect of the standard. The interface can link up to 14 separate IEEE compatible devices. Typical applications are in experimental work in academic and industrial laboratories, with the advantage of speed, accuracy and repeatability. The interface is mains powered and comes with cables, IEEEFS ROM, and user guide. £282(a)


ACORN TELETEXT INTERFACE

This interface allows the retrieval and storage of data transmitted by both BBC and IBA. There are currently many educational and other programs being transmitted, and this unit will allow their retrieval absolutely free. In 'Terminal' mode, the system receives and decodes pages from both Ceefax and Oracle. (These pages can be stored). In 'Telesoftware' mode, the system can load, run and execute programs that are transmitted. This unit gives you a professional teletext terminal at a cost effective price. £180(b)

ACORN MUSIC 500

Convert your BBC micro into a sophisticated music composition aid and sound effects generator. Custom made software will provide you with the flexibility to compose, experiment, perform and teach music. Stereo output can be connected to a sound system including your home stereo unit. Full specification on request. £174(a)

DATABASE MANAGEMENT SYSTEM

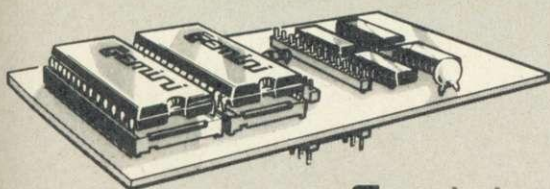

Gemini DATAGEM

The Definitive Random Access, 24K ROM Based DATABASE MANAGEMENT SYSTEM.

DataGem is the first truly flexible database for the BBC Micro that can make your system really useful and efficient, saving you money in the long run. The system includes a carrier board containing two Eproms, demonstration applications disc in both 40/80T, professional documentation with quick reference card, and 'Trans' utility program. Features include: *almost unlimited file size (max 10MByte) *supports up to 4 drives *Max of 5000 records per file *max 6K record size *max of 62 fields *9 level hierarchical search system with facilities to store results of searches. Searches can be any one of the following: Search, Include, Exclude, Combine, Common or Difference *user defined variables *generates form letters from records. Please ask for leaflet. £112(c).

STARdataBASE A fast machine code, true random access database program in a 16K Eprom. Up to 4096 records in a file, up to 69 fields in a record. The record layout is totally user defined. Entirely menu driven — thus very user friendly. Extremely fast searches are possible using the Keysearch facility. Mailmerging from View and Wordwise, and address labelling. Its printer configuration suits any BBC compatible printer. £75(d)

ROMs/SOFTWARE

VIEW Acorn's new version V2.1 word processor rom. Advantages include printing straight from memory and editing in any mode. £48(c)

HI VIEW Disc based version of VIEW word processor for use with the 6502 2nd processor. Allows 47K of user memory £52(c)

VIEW INDEX Disc based program to create an index from VIEW text files. Ideal for anyone concerned with writing extensive reports or books. £13(d)

WORDWISE One of the most popular word processors for general use £34(d). Wordwise SpellCheck Disc — A must for any serious word processor user. Normal price £16.50(d). If bought with Wordwise: No p&p and only £14.

WORDWISE PLUS The new advanced Wordwise on a 16K eprom, for the more specialised users who require added features and flexibility. New facilities include: 2nd Processor compatible allowing 80 column previewing in all cases, a new Basic-like language, new editing features and embedded commands etc etc. Four new programs are also supplied allowing mail-merging, index generating, two-column text printout and continuous processing. A new 56 page introductory manual and a 180 page reference manual complete this rather special package. Finally, it is able to use existing Wordwise files without any modification. £49(d).

SPELLCHECK II: A rom based fast machine code program that works with both VIEW and WORDWISE. Vocabulary disc supplied with 6000 words can be expanded to well over 17000 words on 100K drive. Fully compatible with 6502 second processor. £26(d)

ISO-PASCAL: Acorn's full implementation of International Standard Pascal on two 16K ROMs. Disc Version for use on 6502 2nd Processor also supplied. Comprehensive manual. £60(c)

ACORN LOGO A full implementation of the Logo language from Acornsoft. Supplied as two ROMs with a tutorial course and technical manual. £60(b)

ULTRACALC 2 This enhanced version of the original BBC Publications popular spreadsheet rom includes many new features including full compatibility with the 6502 2nd processor running as HiCalc allowing 44K of user memory, operate in any mode, greater flexibility in printer control, spooling as ASCII file etc. All these features are in addition to the existing powerful features such as handling of labels and numbers as values. Column-width control and features normality found in well designed spreadsheets. £69(d)

VIEWSHEET Acorn's spreadsheet provides 255 columns and 255 rows and will operate in any mode. Windows can be created which can then be rearranged to provide any print format required. Function keys provide for easy entry of commands. Printer control codes can be used using the printer driver. Fully compatible with VIEW and the 6502 2nd Processor. £52(d)

BCPL A full implementation of the BCPL compiler language consisting of the language rom, disc containing the BCPL compiler, a screen editor, a 6502 assembler, other utilities and programming aids and examples of BCPL code and a 450 page manual. BCPL can be used to develop games; programs, commercial packages, system software, to write control systems and to produce programs which otherwise would need to be written in assembler. £52(b)

BCPL STAND ALONE GENERATOR Utilities in this package enable the programs developed using the BCPL rom to be converted so that they can be run on any BBC micro whether it has a BCPL rom or not. Stand alone programs for other 6502 based systems can also be developed. £43(d)

BCPL CALCULATIONS PACKAGE: supplied on disc, it supports floating point, fixed point and fast integer calculations. It includes the BCPL calculation files, example files and a comprehensive user guide. £17.30(b)

ACORN LISP Rom £43(d)

G:FORTH An advanced implementation of FORTH which follows the 79-Standard specification on a 16K ROM and has a full double number extension set. It incorporates an editor, 6502 assembler, very fast turtle graphics and supports extensive string and file handling. It contains 540 predefined words including those for reading joystick ports, produce sounds, set and read the time and produce random numbers. Fully compatible with disc or tape filing systems and works in any mode. Package comes complete with a USER GUIDE, Introduction to FORTH and 16K GFORTH ROM £43(d)

DISC DOCTOR Computer Concept's popular disc utility rom which adds 20 commands to the DFS system. £27(d)

DISCMASTER Beebug's a disc utility which provides additional DFS commands and utilities including disc menu to automatically RUN/RUN programs, converting 40 track discs to 80 track and enable dual catalog. **£16(d)**

EXMON II Updated version of the EXMON rom with facilities including dual screen operation and full screen memory editor. **£24(d)**

TOOLKIT This ROM adds 27 new commands to the BBC BASIC. These include a full screen editor, merge, relocating data in memory, program compactor, listing of variables and memory search. **£23(d)**

SLEUTH A debugging tool for BASIC programs which includes features like single stepping of dual screen programs, and accelerator to run programs from full speed to freeze frames. **£24(d)**

GRAPHICS ROM Adds 28 new graphic related commands and features include sprites, turtle graphics, rotation, scaling, 3D plotting all using " * " commands. **£27(d)**

PRINTMASTER This ROM features the most versatile screen dump for EPSON MX/RX/FX80 and Kaga 810 printers. It supports three types of dumps. The first allows any graphics on the screen to be dumped. Colours appear as shades of grey. Any part of the screen can be printed at any position on the paper in any one of four orientations. The screen dump may be magnified by any factor x2, x3, x4 etc. A special feature allows true MODE 7 screen dumps with TELETXT text & graphics. The second dump allows any text to be dumped whilst the third dump will print the contents of a file on disc whilst the computer is doing other things. This is not all. All printer functions can be called up using the *command. *DEFINE allows the printer to define his own characters and store them. *GPRINT allows printing of enlarged text in any position, orientation, size & shade. *WINDOW allows windows to be defined in any size and position on the screen. Can allow you to do printing as background operation while the computer does other jobs. In short this one ROM does it all. **£28(d)**

DUMPMASTER Disc based program that produces fast machine code routines for a variety of printers incl. EPSON MX/FX, STAR 910, Seikosha, NEC PC8023, INTEGREX 132A. Dumps in 8 shades in any mode including teletext mode. Snapshot facility allows dumps from games and other programs. **£10(d)**

MUROM Sound Extension Rom: Helps you create your own tunes and sound sequences either with MUROM's editor and a musical score or using the keyboard to simulate a piano. Edit your creations with the full screen music editor and then switch to envelope editor to tailor the tonal quality and select instrument type. Incorporate the music into other programs or playback with or without MUROM. Instant sound effects can be called from Basic eg *ZAP, *SIREN, *EXPLODE etc. **£24(d)**

BILLBOARD A useful program that enables your BBC to produce super-large 'Billboard' type characters i.e. a continuous horizontal scrolling of super-large characters. Supplied in ROM. **£16.50(d)**

HELP Rom based comprehensive on screen HELP facility to aid and speed up programming. **£21(d)**

Write for details on specification and availability of the following packages expected to be released shortly:

Basic Compiler Comal 6502 Development Package

MICROTEXT This authoring system developed by the NPL allows production of a wide range of man-computer dialogues. User can draw up a frame made up of text/graphics and combine a series of frames to create modules which are incorporated into a program. An expert in any field can create complete courses of computer based instruction material. Applications include interviewing systems, teaching packages, training courses and interactive demonstrations and simulations. Disc **£53(b)** Cassette **£43(b)**

REPLICA II 40 & 80 Track Versions available. **£10.35(d)**

BROM — the new utility ROM from Clares — a Toolkit ROM that gives you full screen editing. Many extra functions are included. **£30(d)**

DESIGN Design is a second processor which allows information to be displayed in a format suitable for demonstrations, slide projections, handouts or presentations. Graphs, Pie Charts & Bar Charts are quickly produced; automatically drawn & scaled. Versatile labelling facility, 25 User defined, 4 large macro characters plus screen dump facilities included. **£16.50(d)** Disc (80 or 40 Track).

SUPERPLOT Superplot is ideal for screen representations of mathematical functions. It will plot on automatically scaled axes, in Cartesian, Polar or Parametric co-ordinate systems and will allow overlapping of graphs. Cass **£8.50(d)**.

CP/M SOFTWARE FOR TORCH Z80 ACORN Z80 PROCESSOR

We can now supply almost any CP/M based software package in a format suitable for the Torch Z80 and Acorn Z80 second processors. The following are generally available from stock.

DBASE II £335(a) WORDSTAR PROFESSIONAL £380(a)

WORDSTAR £275(a) DBASE II Tutorial..... £32(c)

PROPASCAL £220(a) Supercalc 2 £200(c)

Phone for your specific requirements.

Please specify the type of format (TORCH or ACORN) required.

SPELLCHECK I Menu driven spelling checker for Wordwise or VIEW. Dictionary contains 6000 words and is expandable to 1700 on 100K disc. **£16.50(d)** Disc (80 or 40 Track) Specify whether Wordwise or VIEW.

MASTERFILE II The new version of the popular general purpose file management system. It allows large amounts of information to be stored and processed. It is extremely powerful yet flexible to use. The disc version allows up to 17 fields per record, and the only limitation as to the number of records is the capacity of the disc. Typically, using 5 fields, about 2000 records may be stored on a 100K disc. This latest version features many new facilities including use with WORDWISE/VIEW **£16.50(d)** Disc (80 or 40T).

HERSHEY CHARACTER font generator: Disc based menu driven package with 1500 new characters made up from 9 different Hershey character fonts. Flexible utility allows choosing of any characters and appending them to users programs. Screen dump routine for Epson printers included. **£12.50(d)**.

When ordering software on disc please specify track format (40/80)

BOOKS

(No VAT p&p £1.50 per book)

CPU/Assembly Language Books		Beyond BASIC BBC Publ.....	£10.00
6502 Applications.....	£12.50	Creative Assembler on BBC.....	£ 5.95
6502 Assy Lang Prog.....	£17.50	Discovering BBC M/C.....	£ 6.00
6502 M/C for Beginners.....	£ 5.95	Expert Guide James.....	£ 6.50
6502 Advanced Programming.....	£11.95	Exploiting BBC BASIC.....	£ 6.95
6502 Programming.....	£13.95	FORTH Acorn.....	£ 7.50
6800 Prog Reference Manual.....	£ 9.00	Further Programming for BBC.....	£ 5.50
6809 Assy Lang Programming.....	£13.45	LISP Acorn.....	£ 7.50
6809 Programming.....	£12.95	Programming the BBC.....	£ 6.50
LANGUAGES		Structured Programming.....	£ 6.50
CP/M Handbook.....	£12.50	S-PASCAL Acorn.....	£ 7.50
Mastering the CP/M.....	£14.95	Using BBC BASIC.....	£10.00
FORTHAN Cookbook.....	£ 8.00	SOUND & GRAPHICS:	
Introduction to PASCAL.....	£14.95	Advanced Graphics with BBC.....	£ 7.50
Prog the Micro with		BBC Graphics & Sound.....	£ 7.50
PASCAL.....	£ 8.50	BBC Micro BASIC, Sound	
From BASIC to PASCAL.....	£ 9.00	& Graphics.....	£ 7.50
The UNIX Book.....	£12.50	Creative Graphics Acorn.....	£ 7.50
BBC Micro Books		Graphics on the BBC Micro.....	£ 6.00
Books for Beginners:		Turtle Graphics.....	£ 7.50
Let Your BBC Teach U to Prog.....	£ 2.50	EDUCATIONAL:	
BASIC programming on the		35 Educational Programs.....	£ 6.00
BBC — Cryer.....	£ 5.50	BBC Micro in Education.....	£ 6.50
BBC BASIC.....	£ 5.50	Prog for Education (Pri.Sch).....	£ 5.95
BBC BASIC for Beginners.....	£ 6.25	DISC DRIVE SYSTEMS:	
BBC Micro for Beginners.....	£ 6.25	BBC Micro Disc Companion.....	£ 7.95
Easy Prog for the BBC		Disc Book:	
Micro.....	£ 5.00	Disc Book.....	£ 3.50
Friendly Computer Book.....	£ 3.50	Disc Programming Techniques.....	£ 6.95
Gateway to Computing BBC1.....	£ 4.95	Disc Systems.....	£ 6.95
Gateway to Computing BBC2.....	£ 4.95	Using Floppy Disks.....	£ 6.95
Getting More from Your BBC &		APPLICATIONS:	
Electron.....	£ 5.95	BBC Software Projects.....	£ 6.95
Introducing the BBC Micro.....	£ 4.50	Business Programming on BBC.....	£ 7.95
Step by Step Programming 1.....	£ 5.95	Business Applications on BBC.....	£ 7.95
Step by Step Programming 2.....	£ 5.95	DIY Robotics & Sensors.....	£ 6.95
Languages/Programming		Essential Maths BBC/Electron.....	£ 5.95
30 Hour BASIC.....	£ 6.75	Exploring Music with BBC	
Advanced User Guide.....	£12.50	& Electron.....	£ 9.95
Adv BASIC Rom User Guide.....	£ 7.50	Graphs & Charts Acorn.....	£ 7.50
Advanced M/C Tech for BBC.....	£ 7.50	Interfacing Projects for BBC.....	£ 6.95
Advanced Prog Tech for BBC.....	£ 8.50	Making Music on the BBC.....	£ 5.50
Assembly Lang Prog for BBC.....	£ 7.95	GAMES:	
Assembly Lang Prog 2nd Ed		21 Games for the BBC Micro.....	£ 5.00
— Birnbaum.....	£ 8.75	100 Programs for the BBC.....	£ 6.00
Applied Assembly Lang on BBC.....	£ 7.95	Creating Adventure Programs.....	£ 5.00
BASIC Rom User Guide.....	£ 9.95	Instant Arcade Games.....	£ 2.95
BASIC II Rom User Guide Acorn.....	£ 4.00	BBC User Guide Acorn.....	£15.00
BBC Micro Revealed.....	£ 2.00	MISCELLANEOUS BOOKS:	
BCPL User Manual Acorn.....	£15.00	6522 VIA Book.....	£ 4.50

EPROMS: 8K 2764-25 **£4.90(d)**; 2764-30 **£4.90**
16K 27128-25 **£12.00(d)**; 16K 27128-30 **£12.00(d)**
RAM: 8K standard power 6264-15 **£14**
8K lower power 6264 LP-15 **£16.00**

TECHNOMATIC LTD

MAIL ORDERS TO: 17 Burnley Road, London NW10 1ED
(Tel: 01-208 1177 Telex 922800)

SHOPS AT: NW London: 15 Burnley Road, London NW10 1ED

(Dollis Hill 2 mins walk, ample car parking space)

West End: 305 Edgware Road, London W2. Tel: 01-723 0233

(Near Edgware Road ☺)

ORDERS FROM GOVERNMENT ESTABLISHMENTS, UNIVERSITIES, COLLEGES, STATE SCHOOLS, HOSPITALS,
NATIONALLY RECOGNISED PLCs WELCOME.

01-208 1177

All prices exclude VAT. Please add carriage (a) £8

(b) £2.50 (c) £1.50 (d) £1.00


and 15% VAT to order value

Carriage (a) by Datapost.

For fast delivery telephone your order quoting

VISA or Access card or official order number.

(Minimum telephone order £5)

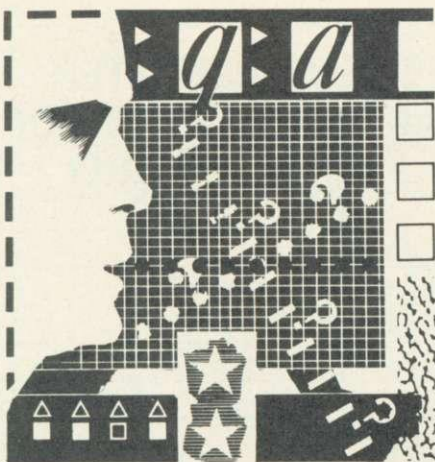

Make April fools

of your friends

with our Idiotmeter

MOST PEOPLE hold the computer in considerable awe and assume it is blessed with powers way beyond its actual capabilities. This image can be exploited to produce a novel practical joke, ideal for April.


You can make a device called an Interactive Determination of Intellectual Objectivity Test Meter (think about it), which is a combination of hardware and software. The software is presented in the yellow pages (p.99). The hardware, well, that's left to your own imagination, but the more switches, dials, lights and impressive cables that are associated with the meter, the more it will impress and convince (no actual connection needs to be made to the computer for this meter—it only needs to look connected).

One essential item is an aerial—this can be a coat hanger bent into an unusual shape. There needs to be a sealed box for the meter, and a lead to 'connect' it to the computer—you could use a printer cable.

For Electron owners, how about using a spare cassette lead? I tried the meter out on a few people using the Teletext adaptor with a label over the legend, and for an aerial I used a portable TV aerial plugged into the back. Similarly, a second processor box could be used.

The idea is that an unsuspecting person (obviously not a reader of *Acorn User*!) sits in front of the meter and it will read his or her IQ directly. The victim is first presented with a screen display outlining the plausible(?) method of operation of the meter—it is

Martin Phillips' topics this month include unlistable listings, impossible line numbers and an IQ test guaranteed to 'crash' your micro

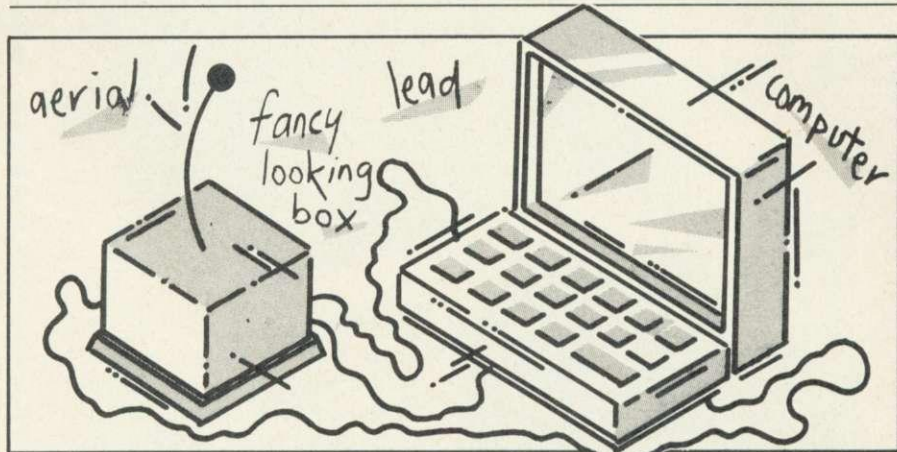

The more impressive your 'hardware' is, the more convincing your 'test' will be

supposed to be able to pick up electromagnetic radiation coming from the brain (which is why you need an aerial). The computer then presents the victim with a series of simple problems which he or she has to answer aloud. As it measures and displays the IQ rating, it tailors the speed at which the problems are displayed, and is therefore able (so the 'theory' goes) to push the person's mental work rate to its maximum, thereby determining the IQ.

It's surprising how many people will believe such a tale! The hard part is keeping a straight face, and that is why the information has been presented on the screen.

The program first displays the theory of operation and instructions for use. Then it will show an analogue meter with a red pointer. The meter scale is graduated and labelled 0-200: this is the IQ rating. The meter does not, of course, do any actual reading but simply starts the IQ rating off at about 50. Then 30 simple tables problems are asked and the pointer will move in an irregular fashion until the IQ rating is somewhere about 140. The speed at which the problems are displayed increases as the IQ rating rises, and reaches such a pitch that many people

start getting flustered and are unable to keep up. Then another 20 or so problems are presented very quickly and the meter reading starts to drop and eventually falls off the screen below 0. At this point the computer does a simulated 'crash'. The screen display starts to flash and then goes blank. A low continuous note is sounded, and on the BBC micro the three keyboard lights come on simultaneously. Pressing any key on the keyboard has no effect. Escape does not work, and Break makes the screen flash but does nothing else. In fact the only ways to stop the computer are to switch it off or to press CTRL-Break. By this time the victim thinks that he or she has damaged the computer.

The first procedure in the program is PROCinitialise. This sets up the actual screen colours required, switches off the cursor, initialises some variables, turns off the keyboard auto-repeat and programs function key 10 (the Break key) to return to the middle of the procedure PROCcrash. This is not good programming, but it works and, anyway, the aim is to get the program to crash. The line number specified in this definition will not be altered should the program be renumbered, so if any changes are made to improve the program then this line number will probably need changing too.

The program works by first printing the instructions on the screen (PROC instructions). It is in mode 1 and there is a double height print routine for the

IF YOU have a technical hitch or a programming problem let Martin Phillips give his diagnosis. We'll pay £5 if you raise a really interesting point. Please give full details of the system you're using and include a listing where appropriate, making your question as specific as possible. WRITE TO: Hints & Tips, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

HARD OR



THE WINCHESTER HARD DISC DRIVE FOR THE BBC MICRO

- Available now!
- Ideal for Econet systems.
- Econet Level 2 compatible.
- Acorn DFS compatible.
- Fast ex-stock delivery.
- Low prices.
- Large capacities – 5, 20⁺ & 25⁺ Mb.
- Comprehensive user manual and utility software included.
- Simple installation.
- 12 month warranty. On site maintenance & extended warranty available.

† (Available April 1985.)

5Mb HARD DISC ONLY £850 + VAT

**20Mb⁺ HARD DISC WITH INTEGRAL
FLOPPY DISC BACKUP**

£1500 + VAT (guide only)

The ideal cost effective solution
for Econet storage problems.

MIDWICH BBC COMPATIBLE FLOPPY DISC DRIVES

- Lower prices.
- High quality Japanese mechanisms.
- 100K to 800K storage capacities.
- Available with integral Disc Interface.
- Optional integral power supply.
- 12 months warranty.
- Complete with utilities disc and comprehensive user manual.
- All 400K and 800K drives are 40/80 track switchable.

- Improved design. Easier operation.


HC1	Single 100K – Alps	£ 69.95
BBC 400	Single 400K 40/80 track	£160.00
BBC 400D	Dual (2 × 400K) 40/80 track	£290.00
BBC 400P	Single 400K 40/80 track with integral power	£186.00
BBC 400DP	Dual (2 × 400K) 40/80 track with integral power	£320.00
BBC 400PI	Single 400K 40/80 track with integral power and Disc Interface	£246.00
BBC 400DPI	Dual (2 × 400K) 40/80 track with integral power and Disc Interface	£380.00
All prices exclude VAT and carriage.		

SOFT?



Midwich Computer Company Limited, Gilray Road, Diss, Norfolk,
IP22 3EU. Telephone: Diss (0379) 4131

MIDWICH
COMPUTER COMPANY LIMITED

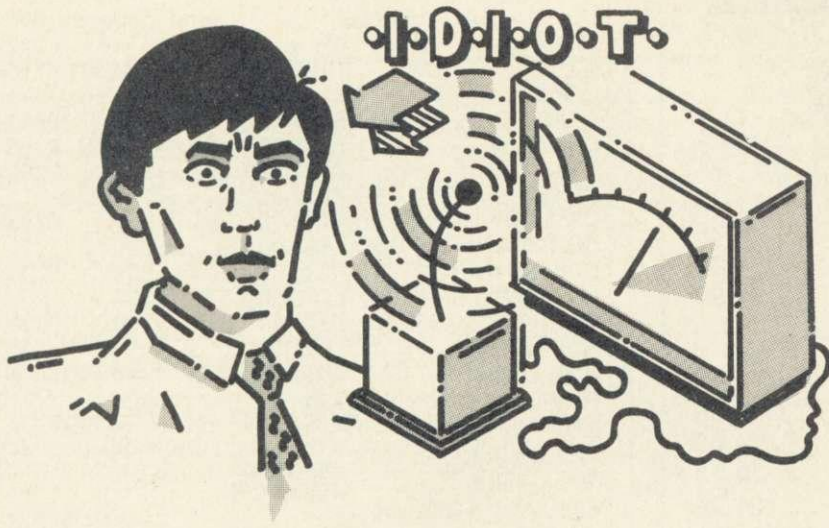

The meter reading will drop after a while... until the IQ rating falls below zero!

title. This is displayed in red on a white background, and the text is in blue—while it is actually being printed on the screen it's in white. The procedure waits until the space bar has been pressed, and then the screen clears and the meter scale is drawn and labelled in PROCscale.

PROCbezel draws the bezel on the meter. This is the solid part at the bottom of an analogue meter that hides the meter mechanism. In this case it can be used to display the problems, which are printed in double height, and the whole bezel area is cleared for speed.

PROCpointer draws a red pointer on the screen. The parameter 'val' determines the position of the pointer and is calculated in terms of the scale, for example, val=0 will put the pointer at 0, and val=200 will set the pointer to the 200 mark on the scale.

PROCrun consists of two loops, one after the other. The first increases the speed at which the problems are set, and makes the IQ reading rise. A random element is included for more realism. Then the second loop prints out more sums, this time with a small

random delay, while the pointer drops down to a figure well below 0, and almost disappears off the side of the screen.

PROCcrash provides the special effects to simulate the computer breaking. First the four screen colours are programmed to alter in a random fashion, then they are all changed to black. The Escape key is programmed to have no effect. Lastly, for the BBC micro owners, the cassette motor light is programmed to come on, as are the shift lock and caps lock lights. An easy way to switch the cassette motor light on is to use *MOTOR 1, which works even on a disc machine without needing to select the tape filing system. To ensure that both caps lock and shift lock lights are on, the computer is put into page mode (the text and graphics cursors must first be separated), and then the screen is made to attempt to scroll. This achieves two purposes. First, the shift and control lights will be lit, and then the program will halt until the screen can scroll. To prevent a press of the Shift key clearing the screen, this last part is put into an infinite loop.

Stop my micro hanging up

MY COMPUTER hangs up when I use VDU21 and VDU6 to stop and restart the screen display, writes Philip Newth from County Durham. The following listing shows the problem:

```
10 FOR N= 1 TO 100
20 VDU 21
30 PRINT "HELLO"
40 VDU 6
50 PRINT N
60 NEXT N
```

The program is quite pointless, but illustrates a problem which is often quite obscure and difficult to trace. When VDU21 is executed, a Return character is sent to the printer, whether

it is enabled or not. If no printer is connected or if it is switched off, then the print buffer will fill up and cause the computer to hang up. Those readers who try this program with a printer connected and switched on will find that it does not hang up but that the printer starts churning out blank paper.

There are two cures. First, don't use VDU21/VDU6, use *FX3 instead (see an earlier Hints and Tips). The second is to use the 'printer sink'. This is entered using *FX5,0 and the computer then will not hang up or waste paper. When a printer does need to be used, type *FX5,1 for a parallel printer or *FX5,2 for a serial printer.

Listing the

unlistable

OVER THE last few months I have received many requests for a routine to stop programs being listed. The idea for the technique I am going to present here isn't new—I first saw it in a magazine for the Acorn Atom, and it was quite easy to implement on that machine. It's not so simple on the BBC micro and Electron but it can be done.

It involves putting control codes to switch off the printer and screen display at the start of the program in such a way that they are not implemented if the program runs, but are when the program is listed. The ASCII code to switch the screen off is 21, and this can be tested by typing CTRL-W (the 21st letter of the alphabet), and then trying to enter something else. The computer is still active but no screen display will be shown—it can be turned on again by typing CTRL-F. Switch off the printer using ASCII code 3 (CTRL-C).

The REM statement can be used to obtain an unlistable listing, as anything following it on the same line is ignored when the program is run, but is printed out when the program is listed. The problem is to put the codes in after the REM statement, as this can only be done by poking the codes directly into the line. It sounds complicated, but is quite easy once the method is understood.

Before using the technique, try it out on the test program given below:

```
10 REM > > >
20 PRINT "What a load of rubbish"
```

Line 10 is the important line. After the REM statement, there are four greater-than signs. When the program is listed, just one of these will be seen, followed by the cursor, making it appear that the computer is waiting for another command. The screen is first cleared so that the line number of the REM statement is not seen, because that would give the game away, as you'll see later.

Next, program a function key as follows:

```
*KEYO FOR N=PAGE
E TO (PAGE+16):peek=?
N:P."&";~N,"&";~peek;
:IF peek>32 AND peek<
91 THEN PRINT"... "CHR
$(peek):NEXT:ELSE PRI
NT:NEXT IM
```

This program will list the first 16 memory locations where the program is stored. The position where it is stored in memory is given by PAGE,

MICROMEDIA-MICROMEDIA

SUPPLIES SAVE ££££

FLOPPY DISCS

NASHUA 5 YEAR WARRANTY

All prices inclusive of VAT and carriage.

5 1/4" TPI	1-2 boxes	3+ boxes
SS/SD 48	13.50	12.75
SS/DD 48*	15.85	13.85
DS/DD 48*	18.95	16.75
SS/DD 96*	20.90	17.90
DS/DD 96*	24.80	21.50

Special offer - items * Free Library Box

3M Lifetime guarantee

5 1/4" TPI	1-2 boxes	3+ boxes
SS/DD 48	16.30	14.00
DS/DD 48	21.40	18.70
SS/DD 96	24.25	21.00
DS/DD 96	28.00	24.30

Disc Storage	1-2	3+ Boxes
10 x 5 1/4 See10	3.50	3.00
30 x 5 1/4 Rexel	8.00	7.50
90 x 5 1/4 Lock Lid	17.80	—

Ribbons	per ribbon	per box
Brother HR15 M/S	5.60	5.10 x 6
Canon PW 1080	7.40	6.75 x 6
Epson FX/MX 80	4.85	4.00 x 5
Epson FX/MX 100	6.50	5.25 x 3
Juki 6100	4.20	3.50 x 6
Kaga KP 810	7.40	6.75 x 6
Oki Micro 80/82	2.35	1.90 x 12
Walters VM 2000	4.65	4.15 x 4

Continuous Labels	1000	3000 +
89 x 36 - 1000	6.00	4.50

Listing Paper	per box
11" x 9 1/2" 500	4.50
11" x 9 1/2" 2000	17.00
(Exact A4)	
70 GSM 2000	22.50
100 GSM 1000	25.00

All prices inclusive of VAT and carriage

PERIPHERAL BARGAINS FROM COMPLEX

CUMANA + OPUS DISC DRIVES			PRINTERS	
Cumana	Opus	Price	Mannesmann	
—	5400	£105.00	Tally MT80	£199.00
CSX 100	5401	£112.00	Epson RX 80	£219.00
CSX200D	5402	£145.00	Epson RX	
CSX200S	—	£139.00	80F/T	£249.00
CSX400S	5802S	£162.50	Epson FX80	£365.00
CS 100	5401SD	£135.00	Kaga/Taxan	£289.00
CS 200D	5402SD	£174.00	P1080A	£299.00
CS 400S	5802SD	£185.00	Quen Data	
CD 200	501D	£235.00	Daisywheel	£209.00
CD 400S	—	£299.00	Juki 6000	£209.00
CD 800S	5802D	£349.00	Juki 6100	£359.00
Acorn DFS		£95.00		
Opus DDFS		£95.00	Free Lead + Paper with	
(When purchased with opus Drives)			all Printers	
Cumana Disk 96TPI		£16.00	2000 sheets	
			Listine Paper	£13.00

MONITORS	
Philips 7502 Green Screen	£79.00
Philips 7512 Amber Screen	£85.00
Philips 7513 IBM	£95.00
Microvitec 1431	£185.00
Microvitec 1451	£259.00

EPROMS	
2764 £5	27128 £11.50

All prices include VAT + Delivery

Complex Unit 7 Nuneaton
Warwicks CV11 5PR
 Telephone: (0203) 371371

Robots from under £50 that you can interface with your own home micro computer.

JOIN THE

AMATEUR ROBOT ASSOCIATION

- ★ Regular magazine
- ★ List of robot manufacturers
- ★ News Letters
- ★ Huge discounts
- ★ Free entrance to exhibitions
- ★ List of Component suppliers

- ☐ I enclose £35.00 (Affiliated)
☐ I enclose £16.50 (Associated)
☐ I enclose £4.50 (Individual)

Name

Age

Address

Please make cheques payable to: **Amateur Robot Association,**
 5 Queen Street, Haverhill, Suffolk, CB9 9DZ
 Tel: Haverhill (0440) 707072 (5 lines)

RING (0707) 52698
 24 hour credit card
 Orders: (0707) 50913
 Orders with cheques payable to Micro-Media

RYDAL MOUNT
BAKER STREET,
POTTERS BAR,
HERTS EN6 2BP.

POST TO - MICRO-MEDIA - RYDAL MOUNT BAKER ST
POTTERS BAR HERTS EN6 2BP.

Please send me ☐ I enclose Cheque/PO for £
☐ Access/Barclaycard No.
 Signature Name Address

MICROMEDIA-MICROMEDIA

which is set to &E00 on a basic Electron and BBC micro, but will change if a disc filing system, a teletext filing system, an Econet filing system, or a second processor is fitted to the machine. The '&' sign indicates that the number is printed in hexadecimal. It will not matter what value PAGE has when a modified listing is actually used. It is only important now because we need to know where the ASCII codes must be poked.

Once the function key has been programmed, the following should appear on the screen when it is pressed:

```
&1900 &D
&1901 &0
&1902 &A
&1903 &A
&1904 &20
&1905 &F4
&1906 &3E... >
&1907 &3E... >
&1908 &3E... >
&1909 &3E... >
&190A &D
&190B &0
&190C &14
&190D &1E
&190E &20
&190F &F1
&1910 &22
```

This listing was taken from a machine with a disc interface fitted, and so PAGE is set to &1900. Notice that nowhere in this short memory dump do the letters REM appear. BBC Basic 'tokenises' all the Basic statements to save memory space. These tokens are simply numbers that the computer is able to recognise and convert back to a statement name when the program is listed, and they are listed at the back of the User Guide. The token for REM is &F4, which can be seen at location &1905. The first '>' sign appears after the REM token, as would be expected, at location &1906. Therefore, this location needs to be changed to the control character that clears the screen, and this character has the ASCII code 12. We need to type:

```
?&1906 = 12
```

which will put (poke) the memory location &1906 with the value of 12. If your position of PAGE is different from the above example it will be necessary to poke the corresponding location, and not the one given, eg, on a standard Electron or BBC micro this will be location &E06. Now one '>' must be left in the REM statement, therefore locations &1908 and &1909 (&E08 and &E09) need the printer off and screen off codes inserting:

```
?&1908 = 3
?&1909 = 21
```

When these two commands are typed in, the codes will be poked into the required memory locations. Now using the function key again to display the memory contents will show:

```
&1900 &D
&1901 &0
&1902 &A
&1903 &A
&1904 &20
&1905 &F4
&1906 &C
&1907 &3E... >
&1908 &3
&1909 &15
&190A &D
&190B &0
&190C &14
&190D &1E
&190E &20
&190F &F1
&1910 &22
```

These ASCII codes are printed in hexadecimal, therefore the code 12 appears as &C, and 21 appears as &15. The short program in the function key puts in the '&' sign. When the program is run it will operate as expected, but try listing it and the screen will clear with just the prompt and the cursor displayed.

This can be included at the start of any program. Insert a new line, line 0. This is a good one to choose because few people realise that it can be used, and fewer still actually use it. Therefore one is not likely to overwrite part of the program itself, although it is always advisable to check first. The three memory locations also need to be changed as described above, but it is not necessary to program the function key and list the memory locations.

In order to list the program you must delete line 0, but remember anyone else could delete that line too and see the listing. The answer is to change it from line 0 to any line number up to 255, so long as it is the first line of the program, to make it harder to find.

Several lines could be included so that deleting one would have no effect. To do this, put one REM line in and then renumber the program to start at an unusual number such as 237, and then put in a new line 0. Renumber again to move this line up, and include another REM line.

If you come across a program that has been made unlistable in this way, or you've forgotten which line in your own was programmed, define the function key as above and use that to show which line number the program starts at. Or you can list the program with the printer on – it will print just the first line number together with REM.


This all goes to show that if you take enough trouble it's always possible to discover the contents of a listing.

Don't press the

Break key

B GABEL from Sussex has written in about a 'bug' he has found in BBC Basic – if you start a listing with a line number higher than 255, press Break and type OLD, then the line number becomes less than 256. The line number is in fact MODed with 256, ie, line 1000 becomes line 232. This bug makes the building up of procedure libraries difficult, he claims.

This is not a bug as such, but just the way BBC Basic works. When the Break

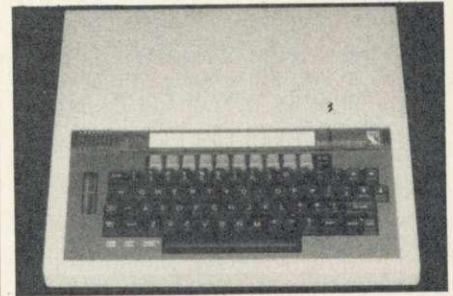


key is pressed, it puts an end of program marker (&FF) in the second location after PAGE, where the most significant part of the line number is stored.

The first location will contain the value 13 if a program was resident before Break was pressed (changing this to 0 will give a Bad program message if it is then recovered using OLD – see the tip on unlistable listings for this technique). The second location is changed to 0 by the OLD command, therefore reducing the most significant part of the line number to 0. This 'bug' should not cause any problems, and my advice to Mr Gabel is not to be so keen to press the Break key when he is writing procedures for a library.

Amazing effect

THE FOLLOWING line has the most amazing and unpredictable effect on the computer:

```
VDU12,31,12,13,66,73,71,32,65,80,
82,73,76,32,70,79,79,76,30
```

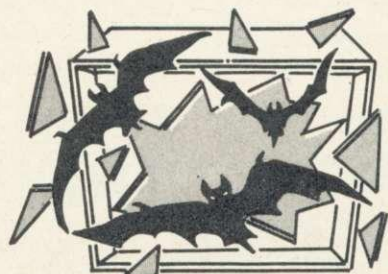

Twillstar reliability for Home

COMPUTERS

BBC

BBC Model B	£349.00
BBC Model B + Disc Interface	£419.00
BBC Model B + Econet Interface	£447.00
BBC Model B + Disc & Econet Interface	£517.00
Z80 Second Processor	£399.00
6502 Second Processor	£199.00
Acorn Bitstick	£375.00
Acorn IEE Interface	£325.00
BBC Prestel Receiver	£132.00
BBC Telex Receiver	£225.00
Speech Interface	£54.00

ELECTRON

Electron	£129.00
Electron Me + My Micro Pack	£229.00
Plus 1 Interface	£59.95
Plus 3 Interface (DFS/Drive)	£225.00

BBC FIRMWARE

View Word Processor	£55.00
Word Wise Word Processor	£37.00
Viewsheets	£55.00
Speech Synthesiser	£54.00
UltraCalc Spreadsheet	£74.00
Graphics ROM	£32.00
Disc Doctor	£32.00
Print Master	£32.00
Communicator	£65.00
Acorn 1.2 O/S	£11.50
Acorn Basic II	£32.00
Termi Emulator	£32.00
Gremlin Debug ROM	£32.00
Caretaker	£32.00
Toolstar	£33.00
Commstar	£33.00
BCPL ROM	£99.00
System ADE ROM	£60.00
System SPY ROM	£30.00
Edword User Pack	£44.00
Edword Teacher Pack	£25.00
Merlin Scribe	£59.00
ExMon (Beebug)	£27.00
Toolkit (Beebug)	£27.00
Mu-ROM (Beebug)	£27.00
Gemini Datagem database	£125.00
BBC UltraCalc	£69.00
BBC Toolbox	£20.00
BCPL ROM + Discs + Manuals	£95.00
Logo	£69.00
Iso-Pascal	£69.00
Beebug Help ROM	£25.00
Beebug Sleuth	£29.00

EXPANSION BOARDS

Raven 20 (upgrade BBC to 52K computer)	£69.95
RAM-AMP 6 socket + 16K RAM	£57.00
6 Eprom socket + 32K RAM	£67.00
IX16K RAM Board	£38.00
Eprom Programmer	
(Blow all your BBC Eproms)	£49.00

BBC UPGRADES

A-B upgrade	£110.00
DFS Interface	£99.00
Econet Interface	£69.00
Speech Interface	£54.00

DISC UTILITIES

View Index	£14.95
View Printer Driver generator	£11.50
Hi-View	£59.00
Acornsoft Database	£15.00
Clares Betabase 40/80	£23.00

Clares Graphdisk 40/80	£12.95
Clares Replica II Disc Copier 40/80	£11.95
Clares The Key 40/80	£12.95
Beebugsoft Masterfile	£19.00
Beebugsoft Design	£19.00
Microtext (cassette)	£49.80
(disc)	£59.85
BCPL Calculation Package	£19.00
Spellcheck II	£31.00

MONITORS

Microvitec 1431 Standard Res	£189.00
Microvitec 1451 Medium Res	£289.00
Microvitec 1441 High Res	£399.00
Microvitec 2031 20" Standard Res	£315.00
Microvitec Sinclair QL	£270.00
Philips BM7502 V.H. Res (Green)	£85.00
Normende TV/Monitor	
+ Remote control	£249.00
Ferguson CTV + RGB	£240.00
Philips CTV + RGB	£229.00
Kaga RGB Vision III 12"	£369.00
Kaga 12" H.R. Green	£118.00
Sanyo SCM 14" VHR	£425.00
Novex 1414 colour Monitor	£215.00

DISC DRIVES

BBC Single 100K Drive	£99.00
BBC Dual 200K	£189.00
BBC Dual 200K 40 Track	£159.00
BBC Dual 400K 40 Track	£299.00
BBC Single 400K 80 Track	£159.00
BBC Dual 800K 80 track	£318.00
BBC Single Power Supply	£20.00
BBC Dual Power Supply	£29.00

PRINTERS

Brother EP44	£228.00
Brother HR5	£148.00
Canon PW1080A 160 CPS (NLQ)	£289.00
Canon PW1156A 160 CPS (NLQ)	£399.00
Kaga KP810 (NLQ)	£285.00
Kaga KP910 (NLQ)	£399.00
Kaga RS232 + 2K buffer	£95.00
Ensign 1650 165 CPS	£305.00
Epson RX80T 100 CPS	£224.00
Epson RX80F/T 100 CPS	£240.00
MP-165 (NLQ)	£316.00
Panasonic KP1091	£325.00
Seikosha GP100A	£189.00
Epson RX100F/T 100 CPS	£396.00
Epson FX80 160 CPS	£370.00
Epson FX100F/T 160 CPS	£494.00
Shinwa CP80	£199.00
Riteman Compact 120 CPS	£199.00
Star Gemini 10X 120 CPS	£230.00
Star Gemini 15X 120 CPS	£339.00
Epson 8143RS232 Interface for FX & RX	£34.00
Epson 814RS232 Interface with 2K Buffer X On/Off	£65.00

DAISYWHEEL PRINTERS

Brother HR15	£378.00
Brother HR15 Keyboard	£155.00
Brother HR15 Sheet Feeder	£212.00
Brother HR15 Tractor Feed	£71.00
Quen Data 20 CPS	£249.00
Juki 6100 18 CPS	£340.00
Juki Single Sheet Feeder	£230.00
Juki tractor Unit	£115.00
Juki RS232 Interface	£74.00
Juki Spare Daisywheel	£16.00

COLOUR PRINTERS

Canon PJ1080A 7 Colour 40 CPS Ink Jet	£440.00
Seikosha GP700A 7 Colour 50 CPS	£399.00

DISKS

Very high quality Fuji
Diskettes, guaranteed for life
at only £20.00 per box
(Double-sided 80 track)

MODEMS

Pace Nightingale	£135.00
(inc Comstar ROM)	£155.00

WS2000

A world standard modem switchable between 75, 300/300, 600, 1200/75, 75/1200 baud rate. This is the only modem you would ever likely to need to communicate with any computer throughout the world.

Modem	£148.00
Lead	£7.50
Auto-Dial	£34.00
Auto-Dial Cable	£4.50
Auto-Answer Card	£34.00

Telemod 2

Switchable modem between 1200/75 and 1200/1200 baud rate that allows you to communicate with services like Micronet, Prestel, Easylink or with other computer users at 1200 baud rate.

Modem	£84.00
Lead	£5.00
Software	£19.95

Telemod 3

BT approved - switchable between 75, 300/300, 1200/75, 75/1200 and allows you to communicate virtually anywhere in the world. It will allow you to communicate with services like Micronet, Telecom Gold, Prestel, One-to-One, Easylink, Microweb. It comes as a standard with built in board for auto-answer.

Modem	£170.00
Lead	£8.00
Software	£19.95

BBC BUSINESS SOFTWARE

GEMINI

Cashbook Acc.	£95.00
Beebcalc	£19.95
Inv. + Statements	£19.95
Commercial Acc.	£19.95
Mailing List	£19.95
Database	£19.95
Stock Control	£19.95
Home Accounts	£19.95
Word Processor	£19.95

Please add £4.00 for Disc Version

ACORNISOFT

Invoicing Order Processing
Mailing List Purchasing
Stock Control Accounts Payable
Accounts Receivable
Price £23.95 each

WORD PROCESSING

BBC 1

BBC Mod. B, View of Wordwise, High Res. Monitor, Quen Data daisywheel printer, Cassette recorder with 10 cassettes and all the necessary cables and printer paper.

BBC 2

BBC Mod. B + DFS, View or Wordwise, 100K BBC drive, High Res. Monitor, QuenData daisywheel printer, 10 diskettes and all the necessary cables and paper
£883.00

BBC 3

Same as BBC 2 but with 400K drive £963.00

and Business computer users

BBC 4
BBC Mod. B + DFS, View or Wordwise, 800K Dual Disc Drive, High Res. Monitor, Juki 6100 daisywheel printer, 10 of 80 track Diskettes and all the necessary cables and printer paper £1,275.00

ACCESSORIES

BBC Data Recorder	£35.00
DR6 Data Recorder	£25.00
Tornado Joysticks SW self-cen PR	£13.95
Quickshot + I/F for BBC	£19.95
Sureshot Joystick	£18.00
BBC Dust cover	£3.50
RH Light Pen	£44.00
Graph Pad	£115.00
BB Key Function key mask	£1.50
Disc storage box	£18.00
Disc storage box (80)	£24.00
Printer dust cover	£4.50
Monitor dust cover	£4.50
Listing Paper 9.5" x 11" (2,000 sheets)	£15.00
Data Cassette C15	£0.40

LEADS

Cassette Leads	£3.00
5 pin DIN to 6 pin DIN (RGB)	£3.00
Monochrome monitor lead	£3.25
Disc Drive power leads to BBC (single)	£4.50
(dual)	£5.00
Disc Drive Ribbon Cable (single)	£8.00
(dual)	£10.00



EXPANSION BOARDS

RAVEN-20 BOARD


The RAVEN-20 is a 20K RAM EXPANSION for the BBC Micro, Model B, fitted with O.S. 1.2.

This specially designed product plugs in to the CPU socket of your micro (centre socket of the 3 available) with the minimum of effort. The pins are specially custom made, thus avoiding any possible damage to the circuitry.

The RAVEN board provides the user with an extra 20K of usable RAM in screen modes 0 to 3. This together with the aid of software makes the system completely transparent to both the user and the computer.

The RAVEN-20 software ROM gives much more than

just the standard commands, it has been programmed to give more and better commands! Priced at £69.95 inclusive of VAT. Please add £1.50 for post and packing.

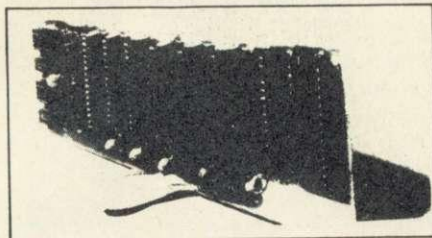

RAM-ROM BOARD

The RAM-ROM extension board gives an extra 6 sockets for extra ROM's and 2 slots of RAM. This RAM is not an extension of BASIC. It is intended that the RAM be used to develop your own ROM based software. There are in fact seven sockets on the board, the 7th replaces the socket on the main board that would otherwise be taken by the ROM board. (The RAM-ROM board can accommodate both 2764 type EPROMs as well as 27128 EPROMs and ROM).

The RAMAMP board will not cause overheating. It comes with fully fitting instructions, tested and heat tested before despatch.

Prices 1 x 16K RAM fitted £57.00 2 x 16K RAM fitted £67.00

BOOKS

30 Hour BASIC (BBC Micro)	£6.95
35 Educational Programs for BBC	£6.95
36 Challenging Games for BBC	£5.95
40 Educational Programs for BBC	£5.95
100 Programs for BBC Micro	£6.95
Cassette version of above	£10.00
6502 Application Book	£11.95
6502 Assembly Language program	£13.95
6502 Assembly Language	
Subroutines	£14.25
6502 Machine Code for Beginners	£5.95
6502 Machine Code for Humans	£7.95
6502 Software Design	£10.50
A young persons guide to BBC Basic	£4.50
A Beginners guide to LISP	£10.95
Advanced Machine Code Technique for BBC	£7.95
Advanced User Guide for BBC Micro	£11.95
Advanced Graphics with BBC	£9.95
Advanced 6502 Programming	£12.45
Assembly Language Programming on BBC Micro	£7.95
Advanced Programming Techniques for the BBC Micro	£7.95
BBC Basic	£7.95
Assembly Lang. Prog. on BBC	£7.40
BBC BASIC	£5.95
BBC Computer Magic	£5.50

BBC DIY Robotics & Sensors	£6.95
BBC Forth	£7.50
BBC Lisp	£7.50
BBC Micro An Expert Guide	£6.95
BBC Micro Book BASIC Sound & Graphics	£7.95
BBC Micro Graphics and Sound	£6.95
BBC Micro Programs in Basic	£5.95
BBC Micro Revealed	£6.95
BBC Micro Assembly Lang. Prog.	£7.95
BBC Micro Disc Companion	£7.95
BBC Micro in Education	£6.50
Basic programming on BBC Micro	£5.95
CP/M The software BUS	£8.95
CP/M Users Guide	£13.95
Creating Adventure Programs on BBC Micros	£6.95
Creative Graphics Cassette (Acornsoft).	
Has 36 graphics programs	£8.95
Creative Graphics on BBC Micro	£7.50
Complete Programmer for BBC	£5.95
Discover BBC Machine Code	£6.95
Discover FORTH	£13.95
DIY Robotics & Sensors with BBC	£6.95
Exploring FORTH	£6.95
Further Prog. for BBC Micro	£5.95
FORTH Programming	£14.40
Functional Forth for the BBC Micro	£5.95
Games on your BBC Micro	£2.95
Games BBC Computer Can Play	£6.95
Getting more from your BBC & Electron	£6.95
Graphs & Charts on BBC Micro	£7.50
Graphic Art for BBC Computer	£5.95
Graphs and Charts (Cassette)	£7.50
Introducing the BBC Micro	£5.95
Introduction to FORTH	£9.30
Interfacing projects for the BBC Micro	£6.95
Introducing LOGO	£5.95
Lt your BBC teach u to program	£6.45
LISP	£9.25
Logo Programming	£8.95
Mastering CP/M	£13.65
Programming the 6502	£11.95
Programming the Z80	£14.25
PASCAL	£9.25
Structured Prog. with BBC BASIC	£6.50
The Complete FORTH	£6.95
Using BBC Basic	£5.95
Using Floppy Discs with BBC Micro	£6.95
Using BBC Basic	£14.50
Using 6502 Ass. Language	£6.95
Wordstar & CP/M made easy	

BEST SELLERS

Frak (Aardvark)	£8.95
Micro Olympics (Database)	£5.95
Chuckie Egg (A'n'F)	£7.00
Fortress (Pace)	£7.95
Contract Bridge (Alligata)	£5.35
Mini Office (Database)	£5.95
747 Flight Simulator (Dr Soft)	£7.15
Elite (Acornsoft)	£14.95

All prices inclusive of VAT. Please add £1.50 for P&P.

HOW TO ORDER

You may purchase any of the items listed by cheque made payable to: Twillstar Computers Ltd. Barclaycard or Access. All you have to do is fill in your requirements on a separate sheet of paper, post to us and we will despatch with 24 hours, subject to availability. All prices inclusive of 15% VAT. ADD £2.50 P&P for orders below £150. Over add £8 P&P. Credit card holders may order by telephone. Give card number, name, address and items required. Please note VAT is not charged on export orders. Export customers please ring for details of P&P.



TELEPHONE ORDERS
(01) 574 5271


Open
6 days a week
9am to 7pm
Monday to Saturday



Twillstar Computers Limited

17 Regina Road, Southall, MIDDLESEX, UB2 5PL. TEL: (01) 574 5271



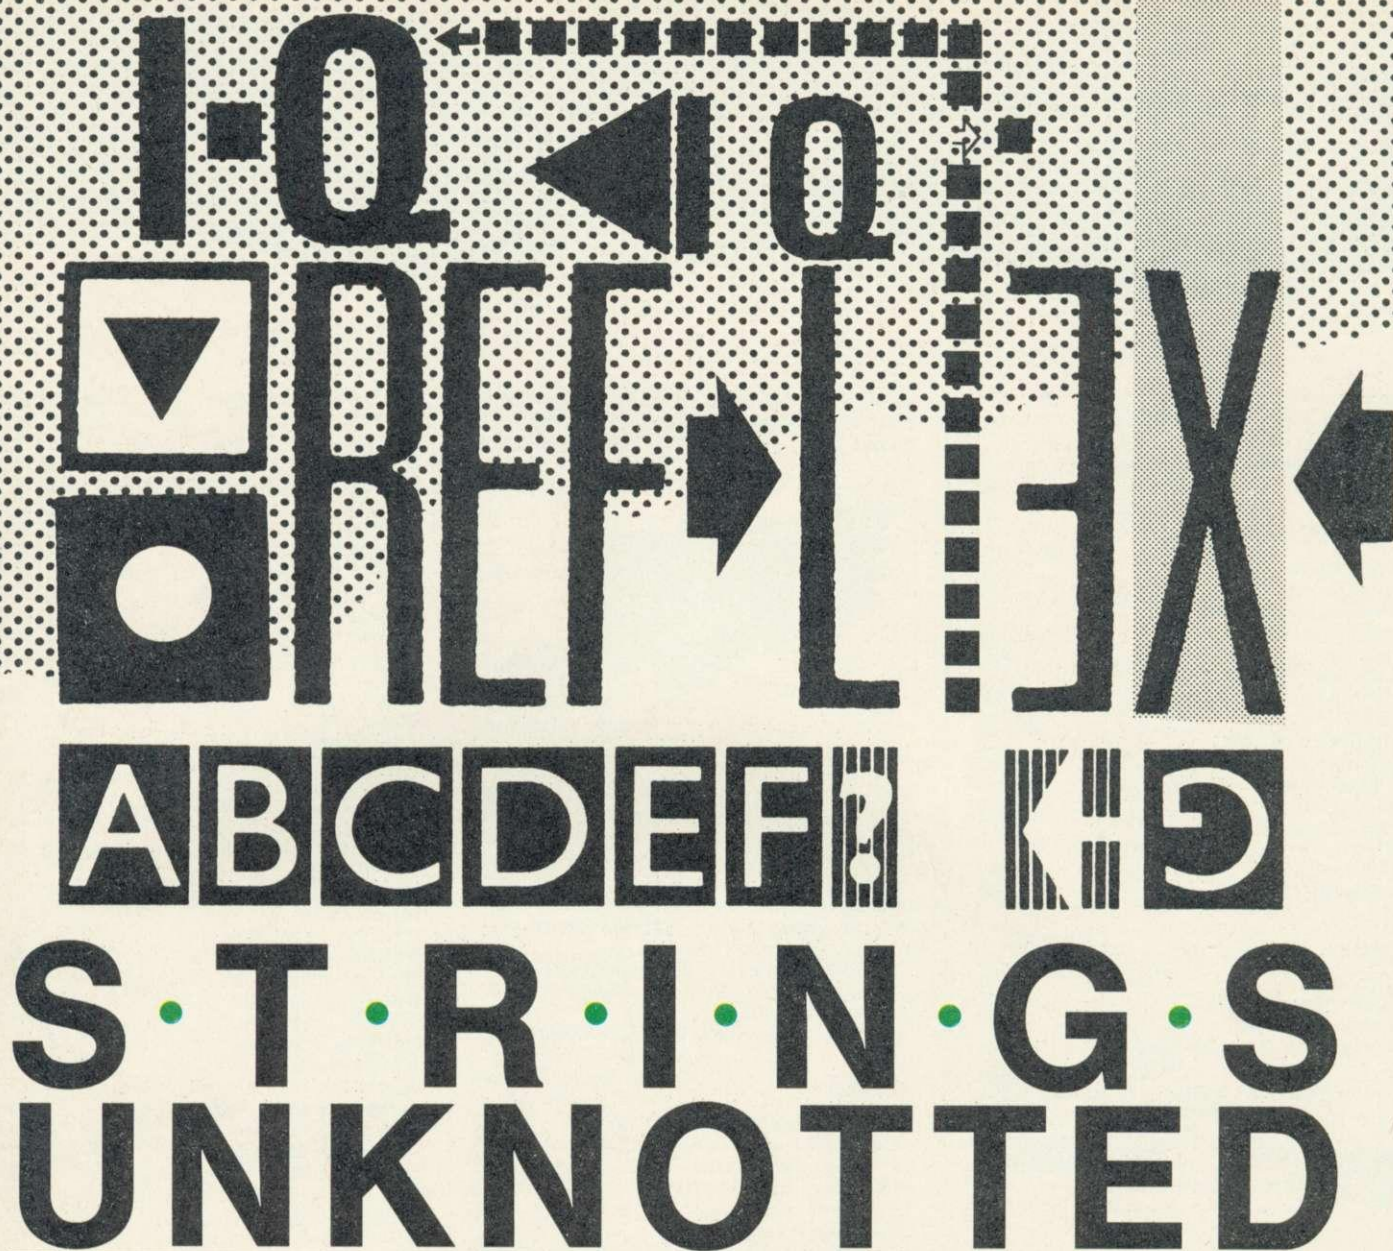

Tessie Revivis shows you how to add character strings together, extract bits from them and juggle them about

LAST MONTH we saw how the data can be validated by a program when it is input directly from the keyboard for use in games or, more seriously, in a database. This month we'll continue that line of thought and look at some of the commands provided in BBC Basic that allow a character string to be manipulated once it has been read into the computer.

One of the most surprising aspects of string handling is that it is possible to add two strings together to form one – in fact, in an almost identical fashion to adding a couple of numbers together! If you saw the following program you probably wouldn't give it a second thought:

```
10 A% = 5 : B% = 6
20 C% = A% + B%
```

C% would contain the sum of the contents of A% and B%. In the same way,

two strings can be added together to give a result – just one long string.

```
10 A$ = "Hi" : B$ = " There"
20 C$ = A$ + B$
```

Running this and typing:

```
PRINT C$
```

will display the string:

```
Hi There
```

onto the screen. A\$ and B\$ still hold their initial character strings.

In the first program, line 20 could also be written:

```
20 C% = B% + A%
```

without affecting the end result; either way C% will contain 11. It is here that the real difference occurs. If we change line 20 of the second program to:

```
20 C$ = B$ + A$
```

then C\$ will now contain the string:

```
ThereHi
```

Obviously you need to bear this in mind when trying to form a single string from two, three, four or more strings. Note also that in the second program I deliberately included a space before the definition of B\$. As there is not a space before "Hi", the final string addition lacks the delimiter. The INPUT statement will always strip, or remove, any leading spaces you type in prior to the actual string itself. However, in addition to adding strings together, we can also insert our own bits and pieces. For example:

```
10 A$ = "Acorn" : B$ = "Roots"
20 C$ = A$ + B$
30 PRINT C$
```

would print:

```
AcornRoots
```

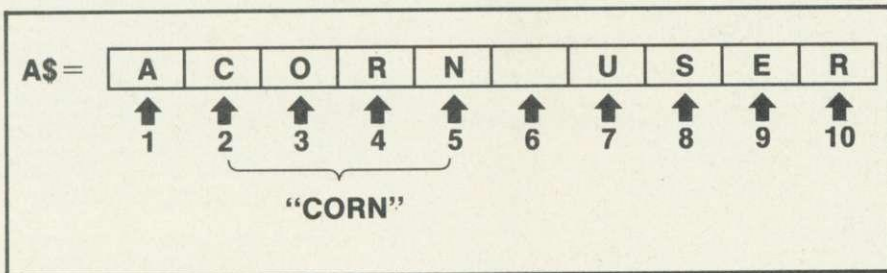


Figure 1. How MID\$ works

when run. We can adjust line 20 to insert a space as required, thus:

```
20 C$ = A$ + " " + B$
```

Here the space between the quotes has been placed into C\$; after A\$ but before B\$. Any text can be inserted in this manner. Try:

```
20 C$ = A$ + " User " + B$
```

or even control codes:

```
20 C$ = A$ + " " + CHR$(7) + B$
```

The CHR\$(7) is the control code to produce a bleep on the Electron or Beeb's speaker. Now when you print C\$ you'll get a bleep into the bargain!

There are three special commands that allow us to extract bits of strings, either from the left, the middle or the right side of the string itself – and just to remind you, they're aptly named LEFT\$, MID\$ and, yes, you've guessed it, RIGHT\$.

Okay, try this program to see the ease with which the first of these commands can be used.

```
10 REM Demo of LEFT$
20 A$ = "Acorn User"
30 FOR loop = 1 TO 10
40 PRINT LEFT$(A$,loop)
50 NEXT loop
```

Rather than explain what it does, run it and see if you can fathom out what happens. The screen should show:

```
A
Ac
Aco
Acor
Acorn
Acorn
Acorn U
Acorn Us
Acorn Use
Acorn User
```

I'll explain what's happening anyhow. The LEFT\$ command looks at the left side of a specified string – A\$ in this instance. The second parameter which this command needs specifies how many characters from the left side of the string it should actually look at. So the command:

```
PRINT LEFT$(A$,5)
```

would print the first five characters,

including spaces and control codes, onto the screen – Acorn in the example.

The program we used sets up a loop that increments from one to 10, or if you prefer, the first to last character in that particular instance.

Forming a FOR...NEXT loop is fine, but we do not always know just how long a string is going to be, particularly if it's being INPUT from the keyboard. Luckily, BBC Basic includes a function to find the length of a specified string – LEN – and we can use it as a control parameter in our loop, thus:

```
10 REM Demo of LEN
20 INPUT "Enter your name" name$
30 FOR loop = 1 TO LEN(name$)
40 PRINT LEFT$(name$,loop)
50 NEXT loop
```

What line 30 means is that the loop will continue for as many times as the



number of characters in the string called name\$. Test the program for yourself – it works!

MID\$ works on the centre of strings and requires you to provide three items of information. That is, the name of the string, the start character and the end character. Thus:

```
10 A$ = "Acorn User"
20 PRINT MID$(A$,2,5)
```

would print

```
corn
```

Figure 1 might make this a bit clearer. C is the second letter while N is the fifth letter. MID\$ extracts these letters and all those in between. Line 20 prints the result, and it is possible to store such a result within a string variable. Line 20 might then become:

```
20 middle$ = MID$(A$,2,5)
```

This sort of technique can be useful. One application you might like to try is to produce a program that reads coded messages input into it by extracting parts of the INPUT strings. The program could also print coded messages by adding bits onto the end of each word to be printed.

The final of the three string manipulators is RIGHT\$. This works like LEFT\$ except that its starting point is the right-hand end of the string, as the following program shows:

```
10 REM Demo of RIGHT$
20 A$ = "ABUSER"
30 FOR loop = 1 TO LEN(A$)
40 PRINT RIGHT$(A$,loop)
50 NEXT loop
```

Running this program results in an output as follows:

```
R
ER
SER
USER
BUSER
ABUSER
```

Another versatile aspect of strings is that they can be used to input a string of characters that require evaluation. How would you go about writing a program that allows you to perform any type of calculation, in just two lines?

Well, Basic provides a command that will evaluate a string. Here are the two lines you need:

```
10 INPUT "Calculation is ",A$
20 PRINT EVAL(A$)
```

Run the program and enter:

```
5+3
```

after the prompt. The result printed is 8. Try some more complex inputs, including any of the micro mathematical functions – the answer is always given!

I started by saying that the INPUT command does not accept leading spaces, which is true. But there is a command, undocumented in the User Guide, that will accept everything you type in without altering it in any way, including leading spaces. The command is INPUTLINE. This is used in exactly the same way as INPUT, thus:

```
10 INPUTLINE "Enter some spaces and text" A$
20 PRINT A$
```

As always, try it and see for yourself. There are a couple more string associated commands – VAL, STR\$ and STRING\$ – all of which are documented in the User Guide. Look them up and try to improve on the examples I've given you and those provided in the manual itself – I'm sure you can!



Watford Electronics



Dept. AU, 250 High Street, WATFORD, ENGLAND
Tel: Watford (0923) 40588/37774 Telex: 8956095 WAELEC
ACCESS ORDERS Tel: (0923) 50234



BBC Micro 'B' Only: £299

Price includes FREE
5 games software packages

BBC MICRO 32K + 32K

(extra 32K RAM Card already fitted)
Only: £359

BBC B with Watford DFS	£385
BBC B with Acorn DFS	£379
BBC B with Watford DDFS	£380
BBC B with ECONET	£369
BBC B + DFS + ECONET	£445
BBC B + DFS + 32K RAM Card	£439
BBC B + 13 ROM Board fitted	£326
BBC B + 32K RAM + 13 ROM Board	£386
BBC B + DFS + 32K RAM + 13 ROM Board all fitted	£465

Complete BBC B ECONET Networking System
now available.

(P.S. ROM based software purchased with any of
the above Micros will be fitted free of charge).

6502 Acorn 2nd Processor	£175
Z80 Acorn 2nd Processor	£339

TORCH Z80 Card + Software	£275
TORCH Z80 Card + Soft. + Disc Pack	£649
TORCH UNICORN Z80 System	£650

Acorn Bitstick	£325
Acorn IEEE Interface Complete	£280
Acorn Teletext + Interface	£195

(Securicor carriage on Micros £7)

Dust Cover for BBC Micro

Protects your expensive Micro from foreign
bodies while not in use. £3.50

PRINTERS

● EPSON RX80 Printer	£209
● EPSON RX80 F/T Printer	£219
● EPSON FX80 Printer	£316
● EPSON FX 100 Printer	£429
● SEIKOSHA GP100A	£122

● Centronics PRINTER CABLE for all the
above printers to interface with the BBC
Micro. £7

(Securicor carriage charge on printers £7)

RX & FX PRINTER INTERFACES

Epson interfaces fit inside the printer to allow
connection using techniques other than Centronics.

RS232	£25	RS232 + 2K Buffer	£55
IEEE 488	£62		

JX-80 FULL COLOUR PRINTER

The new Epson JX-80 DOT MATRIX COLOUR
printer is fully compatible with the popular FX-80.
Using a four colour ribbon, printing can be in 7
colours with speeds of up to 160 CPS. It is
capable of 80 characters per line or 137 in
condensed mode. Its resolution is selectable from
480 to 1920 dots per line. The printer has a
friction and fully adjustable tractor feed
mechanisms as standard.

Introductory offer £525

PRINTER RIBBONS & VARIOUS DUST COVERS

Type	Ribbons	Dust Covers
MX100/FX100	£10.00	£5.25
FX80/MX80	£4.75	£4.95
RX80	£4.75	£4.50
GP80	£4.50	—
GP100	£4.95	£3.95
GP250	£5.95	£3.95
KAGA KP810	£5.95	£4.75
CANON PW1080	£5.95	£4.75
MICROVITEC MONITORS	—	£5.50

4 COLOUR PLOTTER PRINTER

SAKATA SCP-800 printer/plotter facilitates
plotting & printing in 4 colours on paper upto A4
size, using easily replaced pens. In text mode it
prints upto 12 CPS. Max 160 Char. per line. In
graphics mode it offers full plotting facilities incl.
drawing, moving, scaling of text, rotation &
drawing of axes. (Write for a sample printout).

Only £175

PRINTER SHARER

Allows 3 BBC Micros to be connected to one
Printer.

Only: £65

BROTHER HR-15 DAISY-WHEEL PRINTER

Brother HR15 is a high-quality daisy-wheel ideal
for a budget printer for serious use. Notable
features of this printer include a 3k buffer, 18cps
(max), bi-directional printing, proportional
spacing, Centronics or RS232 interfaces as
standard, optional sheet feeder and an optional
keyboard.

With immediate effect, we are offering at
no extra cost ON-SITE 12 months
Maintenance on all HR15 Printers purchased
from WATFORD on or after March 1985.
W.E. GIVES YOU A GREAT DEAL

ONLY £329 (carr. £7)

Single Sheet Feeder	£195
Electronic KEYBOARD	£135
TRACTOR FEED Attachment	£90

RIBBON CARTRIDGES:
Fabric £3.75; Carbon £3.75;
Multistrike £6

DAISYWHEELS (various typefaces)	£18
---------------------------------	-----

Listing Paper (Perforated)

1,000 Sheets 9½" Fanfold Paper	£7
2,000 Sheets 9½" Fanfold Paper	£13
1,000 Sheets 15" Fanfold Paper	£9
Teleprinter Roll (Econo paper)	£4

Carriage on 1,000 Sheets £1.50

PRINTER LABELS

(On continuous fanfold backing
sheet)

1,000 90x36mm	£5.00
1,000 90x49mm	£7.75
1,000 102x36mm	£6.25

Carriage on 1,000 Labels £1.00

All prices exclude VAT

SPECIAL OFFER


HITACHI EPROMs for Sideways ROMs
2764-250ns £4.25
27128-250ns £9.75

RAMs (Low power) for ATPL, WATFORD, etc.,
Sideways ROM Boards

6116LP (2K) £3.25
6264LP (8K) £9.95

(Maximum of 5 ROMs or RAMs of any one type
per order). Dealers inquiry welcome.

KAGA KP810

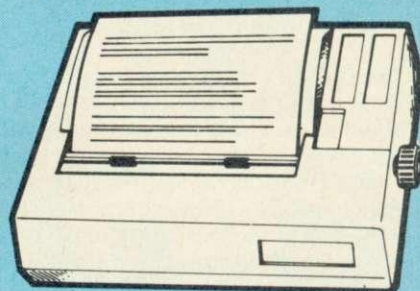

This new Japanese printer has EPSON FX/RX
compatible control codes and is functionally
equivalent to an FX80 with the added advantage
of its 'Near Letter Quality' mode. It is solidly built
and features include: Normal, Italic, Enlarged,
super/subscript, proportional spacing and
user-defined character set. Extras over the FX80
included in the price are Near Letter Quality
(NLQ) print ideal for correspondence, Proper
adjustable tractor feed, half speed quiet mode
and 3K buffer. The printer is bi-directional and
logic seeking to give a speed of 140CPS for high
throughput in conjunction with the standard 3K
buffer. 8K RAM may be added to give more
user-defined character sets. Centronics parallel
interface + Watford's 12 month NO QUIBBLE
WARRANTY.

Special Offer: ONLY £252 (£7 carr.)

RS232 interface + 2K buffer to connect to other
micros. £89

KAGA KP910 Printer

Similar to the KP810 but with 17" carriage for
wide print. Gives 156 columns of normal print or
256 columns in condensed mode. Ideal for
printing out spreadsheets.

ONLY £339 (£7 carr.)

PRINTER LEAD

Centronics lead to connect BBC micro to
EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI,
BROTHER, SHINWA etc. printers.

Standard length (4 feet long)	£7
Extra long (6 feet long)	£9

3M - 5 1/4" DISKETTES


Top quality 3M - SCOTCH Diskettes from Watford Electronics (Your 3M Appointed Distributors). All discs carry a lifetime warranty. These discs are quiet in operation and insert positively with their reinforced hub rings. Boxes of 10 supplied complete with self stick, disc labels and write protect tabs.

DON'T SETTLE FOR LESS, BUY THE BEST

● 10 x S/S D/D	40 Track Diskettes	£13
● 10 x D/S D/D	40 Track Diskettes	£18
● 10 x S/S D/D	80 Track Diskettes	£22
● 10 x D/S D/D	80 Track Diskettes	£24

FREE with every pack of 10 x 3M Discs this most useful "Post-It" NOTE PAD & TRAY PACK.

DOUBLE DENSITY DISC INTERFACE

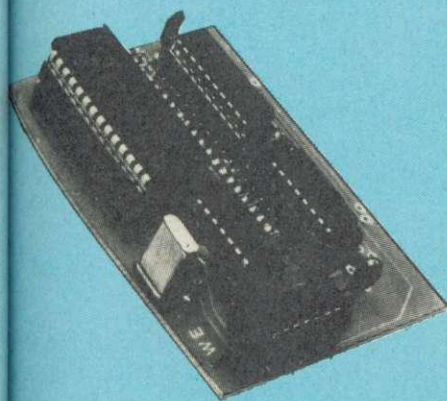

SIMPLE but SOPHISTICATED

We are proud to bring to you the Watford Electronics Double Density Board for the BBC Micro. The DDFS supplied is a new version of the popular Watford Electronics DFS re-written to make full use of the capabilities of the new double density controller. Runs the version of Acornsoft ELITE that we sell.

- Increases storage capacity of your Disc Drives by the maximum physically possible, **80% !!!**
- Our system will use the whole of an 80 track drive. Inferior systems do not allow files longer than &3FFFF bytes, but with our system files can be as long as one disc side.
- Discs may be created in either single or double density format with the built in formatter and in single density mode are fully compatible with normal Acorn format discs.
- The density of the disc you put in is automatically sensed by the system and you are informed of the density in the catalogue display.
- The double density system is of course faster than single density.

The Watford Electronics DDFS implements an extremely comprehensive 8271 emulator so that commands passed through OSWORD & 7F are correctly interpreted. Other manufacturers thought that read and write sector alone were sufficient - we decided to implement every command of the 8271 that was physically possible. We have allowed the use of all the special registers including bad tracks, allowed access to deleted data etc., etc. The emulator itself takes up around 1K of compactly written machine code. We reckon it will run many of the protected discs now available. Gain all the advantages of the WE DFS together with much increased storage and compatibility with many existing protected discs.

(please write-in for full technical specifications)

Complete Double Density Disc Interface **£85**
DDFS Manual **£6.95** (no VAT)
We will exchange your existing Single Density Interface for our DDFS Unit for **£49** (Carriage £1.50)

THE ULTIMATE Single Density DFS

Watford are proud to be able to supply both SINGLE and DOUBLE DENSITY versions of their highly acclaimed Acorn compatible DISC FILING SYSTEM. Single Density DFS runs Acornsoft's ELITE.

What do the independent press say?

"Good value for money" - Beebug
"A very worthwhile package" - The Micro User
"You'll be buying a very powerful package" - Personal Computer News
"Superior DFS; Excellent disc sector editor" - Computer Answers

Without a doubt the most sophisticated DFS software yet written for the BBC microcomputer. This powerful DFS is fully compatible with the ACORN DFS, yet has much increased power due to the additions, carefully designed to make life easier in normal use. It consists of 16K of efficiently written machine code. It is entirely self contained and so does not require a utilities disc to function.

SINGLE DENSITY INTERFACE PRICES

● DFS (Disc Filing System) ROM	£18
● Complete Disc Interface Kit Incl. DFS ROM & fitting instructions	£89
● Acorn's DFS Kit complete	£86
● DFS Manual (comprehensive)	£7
● We will exchange your existing Acorn DFS for Watford's ULTIMATE DFS for	£14

Watford's DFS is exclusively available from Watford Electronics. We DO NOT retail this product through dealers. Every ROM carries a printed label with our LOGO and a serial number.

THE FEATURES OF WATFORD'S SINGLE & DOUBLE DENSITY DFS.

- The system allows standard Acorn's 31 files or 62 files per disc side.
 - Built-in formatting program.
 - Built-in Disc VERIFIER.
 - Built-in SECTOR EDITOR.
 - Double step mode allows use of 40 or 80 track Discs on 80 track drives. (software switchable).
 - A WORKFILE function allows a program to be edited and repeatedly saved having only typed its name once.
 - Allows use of AMBIGUOUS filenames.
 - Two commands exist to allow transfer of programs from tape to disc.
 - An Advanced COPY COMMAND is included.
 - RENAME has been extended to allow the use of ambiguous filenames.
 - An improved OPENOUT command.
 - A SPACE command informs you of the space left on the disc.
 - 2K of RAM can be reclaimed from the DFS by setting "PAGE" to &1100.
 - FULLY COMPATIBLE WITH TELETEXT, TORCH and both ACORN 2nd PROCESSORS.
 - Disc prepared on ACORN DFS can be both read & written to on WATFORD's DFS & vice versa.
- Please write-in for further detail technical specifications.

DISC ALBUMS

Attractively finished in beige leather-look vinyl, these conveniently store up to 20 Discs. Each Disc can easily be seen through the clear view pockets.

£4.25



ACCESS HOT LINE
(0923 50234)
24 Hours

MYSTERIES OF DISC DRIVES & DFS REVEALED

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.


For instance, what is the difference between single and double density formats, how can you use a 40 track disc on an 80 track disc drive? What is the difference between a DFS and disc interface kit? Should you acquire a single Disc drive or twin? What does 48 TPI and 96 TPI discs mean? These are just a few of the questions you may have asked yourself and never found the answer or maybe you have yet to encounter these questions.

Now the mystery of buying a suitable interface and disc drive for your BBC micro is revealed in Watford Electronic's new book entitled 'MYSTERIES OF DISC DRIVES & DFS REVEALED'. It describes in fine detail, yet remaining very readable to the beginner, how disc drives operate, the type of interfaces available, which type of discs to use on a disc drive and how data is stored on the discs.

There is even a handy section describing the phrases you are likely to encounter, and how to interpret them. This book must be an essential purchase at £5.95, especially if you own or are thinking of buying a disc system.

£5.95 (Book No VAT)

LOCKABLE DISK STORAGE UNITS



Strong plastic cases that afford real protection to your discs. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.

M35 holds up to 40 discs **£12**


M85 holds up to 95 discs **£17**

FLOPPY HEAD CLEANER KIT

The heads in a floppy disc drive are a precision made and very sensitive to dirt. Drive manufacturers recommend that you clean the heads approximately once a week. Unless your home or office is dust free one of these kits is a very sensible precaution against losing valuable data. A dirty head can destroy many disks before you realise the trouble. Very simple to use.

Only **£9**

PLASTIC LIBRARY CASES

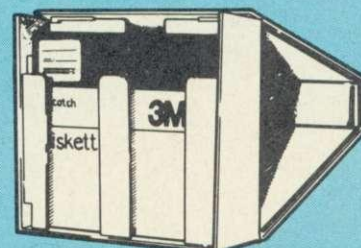

for Disc Storage 5 1/4" (holds 10) **£1.80**

Continued ▶

BBC MICRO WORD-PROCESSING PACKAGE

A complete word-processing package (which can be heavily modified to your requirements, maintaining the large discount). We supply everything you need to get a BBC micro running as a word-processor. Please call in for a demonstration.

EXAMPLE PACKAGE

BBC Model B, Watford Electronics' DFS upgrade, WORDWISE ROM, Twin 200k Epson drives in beige, Zenith 12" Hi-resolution monitor (Green or Amber), Brother HR15 daisywheel printer, Gemini software: BEEBCALC spreadsheet, analysis and DATABASE software on disc, 10 x 3M disc, 500 sheets fan-fold paper, 4 way mains trailing socket, manuals, all leads and BBC carrying case.

NEW LOW PRICE

Only £1,089



We stock a range of monitors to suit all needs. Choice of a monitor is a matter of personal taste so we recommend that whenever possible, you ask for a demonstration at our shop.

MICROVITEC

- 1431 - Medium resolution as used on the BBC television computer programme £165
- 1451 - High resolution, suitable for word processing in mode 0 £237
- 1441 - High res, exceeds the capabilities of the BBC micro £385
- 1431AP RGB + PAL and AUDIO £199
- 1451AP RGB + PAL and AUDIO £285
- Dust Cover for Microvitecs £5.50

All Microvitec Monitors are 14" RGB in their distinctive right angle sturdy metal case or the new beige plastic case. They are supplied complete with connecting lead to the BBC and a 3pin mains plug.

KAGA

- KAGA Vision 2 High Res. Colour £225
- KAGA Vision 3 Super High resolution, Colour £310

Kaga Monitors are 12" RGB colour units housed in an attractive beige plastic cabinet. They all have as standard, a genuine etched anti-glare screen.

ZENITH


12" Ultra high resolution monochrome monitor. Ideal for word processing as its green or amber screen is very restful to read. The high resolution makes it good for games too - you can really see the detail that has been put into the graphics ONLY £66

LEADS

- BNC Lead for Zenith or Philips £3
- RGB lead for KAGA £5

N.B. Carriage on Monitors £7 (securicor)


SWIVEL BASE FOR MONITORS



Only £15

DISC DRIVES PRICES SLASHED

(ALL DRIVES NEW
SLIM-LINE)

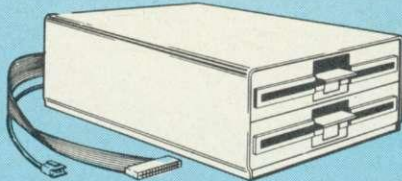

(DRIVES Cased with Cables. No PSU. Connects directly to the BBC's power socket.)

- CLS 100 Single, TEC Single sided 40 track 100K, 5 1/4" Disc Drive £89
- CLS200 Single EPSON Drive, Double sided 40 track, 200K, 5 1/4" £99
- CLS400 Single, Mitsubishi/Epson Double sided 80 track 400K, 5 1/4" Disc Drive £126
- CLS400S Single, Mitsubishi/Epson Double sided 40/80 track Switchable, 400K, 5 1/4" Disc Drive £135
- CLD200 TEC Single sided 40 track 200K twin 5 1/4" Drives £165
- CLD400 Epson, Double sided 40 track 400K, 5 1/4" TWIN Drives £199
- CLD800 Mitsubishi/Epson Double sided 80 track 800K, 5 1/4" TWIN Drives £235
- CLD800S Mitsubishi/Epson Double sided 40/80 track switchable, 800K, Drives £269

(CUMANA) DRIVES CASED WITH PSU & CABLES



- CS100 TEC Single sided 40 track 100K 5 1/4" Single Disc Drive £119
- CS200 Epson Double sided 40 track 200K 5 1/4" Single Disc Drive £139
- CS400S Mitsubishi/Epson Double sided 80 track 400K 5 1/4" Single Drive £149
- CD200 TEC Single sided 40 track 200K 5 1/4" TWIN Disc Drives £205
- CD400 EPSON Double sided 40 track 400K 5 1/4" TWIN Disc Drives £215
- CD800 Mitsubishi Double sided 80 track 800K 5 1/4" TWIN Drives £295
- CD800S Mitsubishi Double sided 40/80 track Switchable 800K TWIN Drives £299
- DFS Manual (comprehensive) £7 (No VAT)
- TWIN Disc Drive CASE with Power Supply to house your own Drives £38

N.B. All single Drives with Power Supply will be supplied in a twin Case for later inclusion of a second Drive.

(Carriage on Disc Drives £7 securicor)

P.S.

● You do not require a formatting Disc nor the expensive 40/80 track switchable Drives when using Watford's sophisticated Disc Filing System which has this facility as one of the many facilities incorporated in it as standard.

Cont.

● MITSUBISHI & EPSON Slimline 400K Disc Drives that we supply are Double sided Double Density, 1 Megabyte unformatted. (With BBC Micro 400K after formatting). When used in conjunction with our Double Density Interface, you obtain 725K formatted. Track density is 96 TPI, track to track access time is 3mSec. These drives are very fast, quiet and efficient. We strongly recommend them.

● Extensive test carried out in our workshop has proved that the BBC Micro's own switchmode power supply is capable of driving 2 disc drives and a host of Sideways ROMs without undue heating. We recommend our CLS & CLD range of Disc Drives which will save you considerable expense without sacrificing performance.

● Please send an SAE, for further technical specification on our Disc Drives.

DUST COVERS

(For our Disc Drives)

Single (without PSU)	£3.20
Twin (without PSU)	£3.85
Single (with PSU)	£3.25
Twin (with PSU)	£3.90
Twin (side by side with PSU)	£3.95

FORTH ROM for BBC

This ROM provides a complete implementation of the FIG-FORTH standard (including editor). Supplied with a large tutorial manual at only £32

TINY PASCAL for BBC Micro £54

NEW
LAUNCH

ROM-SPELL



A ROM based fast spelling checker essential to serious word processing users of the BBC micro.

Compatible with the popular word processors VIEW, WORDWISE and also with *SPOOLED text files. Allows misspelt words to be changed without returning to the word processor. Simply load the text and execute the spelling checker, correcting the words as you go along, or all at once at the end.

An optimised word compacting technique gives a comprehensive 30,000 word dictionary as standard as well as a user defined dictionary for specialist applications. Efficient data storage also means faster operation, text can be checked at 160 words per minute!!! Equivalent to looking a word up in a standard dictionary in well under half a second!

An ambiguous word checking facility allows partially spelt words to be checked against the dictionary and all the matches displayed. This is ideal when you are uncertain of a spelling and a boon for crossword addicts!

Full access to the dictionary from BASIC allows users to check words from within their own programs. Useful for educational programming and also to compilers of word puzzles and anagram solvers. Save time spent looking in dictionaries, use ROMSPELL.

ROMSPELL is supplied on a ROM with the dictionary disc and full instructions for Only:

£25

(Please specify 40 or 80 tracks when ordering)

THE EPSON FX/KAGA PRINTER COMMANDS REVEALED

for the BBC Microcomputer
(The only Printer Book for the Epson FX-80 compatible printers).

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities - he may even have offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON FX/KAGA PRINTER COMMANDS REVEALED'.


This book describes in plain, easy to understand English how to use your printer (Kaga KP810, Canon PW1080A, or any other Epson FX-80 compatible printer) with the BBC micro, both from Basic and your Wordwise wordprocessor.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.

This book is superb value at only
£5.95 (Book - No VAT)

EPSON FX/RX NEAR LETTER QUALITY PRINT ROM

EPSON NLQ ROM
for the BBC Micro

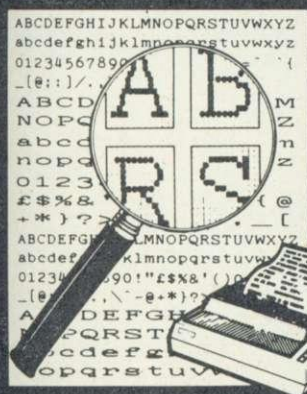


Impress your friends and business colleagues with the quality of your letters and printed material with Watford's very simple to use EPSON NLQI (Near Letter Quality) ROM. Suitable for FX80, RX80, RX80F/T, FX100.

Look at the features:

- Simply type *NLQ80/100 and a single VDU code to use NLQ print.
 - NLQ is then available without any modifications from BASIC, WORDWISE, VIEW (with NLQ DRIVER) or virtually any other program or language.
 - Single codes select PROPORTIONAL type (yes even on the RX80); ENLARGED type; UNDERLINED type. These features can be used separately or in any combination.
 - Full UK character set.
 - Standard 'pica size' Proportional spacing.
 - Enlarged Underlined Normal type.
- The NLQ ROM is incredibly easy to fit and use. Supplied complete with Manual.

Only: £20

DUMPOUT 3 NOW WITH EXTRA FEATURES!

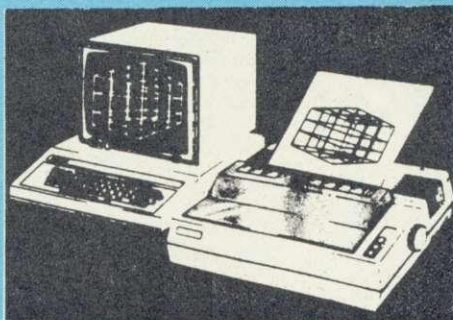

A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including all Mode 7 facilities etc. We have to admit that there is one facility that we cannot replicate - if anyone can supply flashing ink we would like to know!

The ROM also provides window setting utilities and two new OSWORD calls that allow mode 7 graphics pixels to be read and plotted using the standard graphic co-ordinate system. The latest version includes a graphic dump trigger for dumping screens from games whilst they are running.

Two commands are used to operate the dump routines:

*GIMAGE - This provides a full graphics dump of any Mode (including Mode 8). There are many optional parameters but you need only specify the parameters you wish to change.

● V <scale>, H <scale> - These 2 byte numbers give fine control over the size of the dump from minute to enormous. Unlike other dump ROMs, scale works the same in all modes inc. mode 7.

● R <0-3> - Print dump rotated by 0, 90, 180, 270 degrees.

● I <indent> - Set gap from left edge of paper.

● X <min><max>, Y <min><max> - Selects screen area, by default the whole graphics window is dumped.

● P - Dump shows physical colour values.

● G - Grey scale reproduction, dumps otherwise use a negative scale (white prints darkest).

● T Two tone dump for maximum resolution.

● M <mask> - 8 bit colour mask.

● E - Contrast expansion to make mode 7 text and separated graphics stand out clearly from the background.

● C - All mode 7 graphics are printed as contiguous to improve the shading in graphic areas.

● K - Key-triggered dump. The dump does not commence immediately, but can be triggered off later by pressing <SHIFT><O> or <CTRL><ESCAPE>.

● S - Switch-triggered dump. As K, but the trigger is an external switch (not supplied) connected to the user port. The S option can still work with games that corrupt RAM page D.

*TIMAGE <indent> - Does a fast, text only, dump of the contents of the text window in any mode.

*GWINDOW and *TWINDOW - These

commands draw the graphics and text windows, respectively, on the screen and allow them to be changed with the cursor keys. Note that GIMAGE and GWINDOW work fully in mode 7.

Designed for use with the following printers: CP80, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, LPVII, NEC PC8023, DMP100/120/200/400, etc. etc.

Price including comprehensive manual

£22

VIEW

VIEW WORDPROCESSOR

We are supplying the new VIEW version 2.1 allowing printing of memory contents etc

£46

HI-VIEW

A special version of VIEW designed for use with 6502 2nd Processor. Available on disc, it offers 47K of text memory.

£49

VIEWSHEET (Acornsoft)

£49

Watford's own Sophisticated VIEW PRINTER DRIVER for Epson FX80 & KAGA KP

To simplify using the full facilities of the Epson FX80 or Kaga KP810 use this printer driver. Full facilities are provided for selecting between fonts etc. The disc includes examples of use and instructions. Available on 40 or 80 track disc (please state which required).

£7

VIEW DRIVERS FOR JUKI & BROTHER PRINTERS

Only £7

VIEW/VIEWSHEET PRINTER DRIVER for SILVER REED

(Officially approved by Silver Reed)

A range of VIEW Printer drivers to complement the Silver Reed range of printers EXP400/500/550 & 770 EB 50 and converted typewriters EX43/44 & 55.

Only: £7

BEEB PRINTER ROM



"Makes Printing Childs Play"

This utility ROM is designed to simplify using all the facilities of your printer. It has many facilities:

★ Selection of printer modes such as underline, font and size is by 'Single Key' operations.

★ From Wordwise, a single number following OC will select a mode rather than a long and inco.nprehensible string of control codes. This makes using your printer with Wordwise much more convenient.

★ When using Basic (or other languages) you can have control over the formatting of the output to the printer in the style of a wordprocessor. You can define page top, bottom and side margins etc. with intelligent page skip for binders an option. All supported printers will now respond to form-feed etc. commands.

★ User defined characters are printed as you see them on the screen so that non-standard characters are automatically printed out correctly.

★ Commands select the options for the following printers: GP100, STAR, NEC, MX/FX, KAGA, LP/VII/DMP100, DMP200. Operates with either parallel or serial interfaces.

★ Supplied with a 50 page manual that is very comprehensive and easy to follow. Please specify printer type when ordering so that we can send the correct function key strip.

Price: £24

Continued

TWO DATABASE MANAGEMENT SYSTEMS



DISCDATA

Discdata is an entirely disc based database handling system. It is extremely easy to use through its comprehensive menu system. The simplicity is such that we do not feel the need to provide explanation on use in the written guidance supplied with the program. The first-time database user will rapidly become familiar with this package designed throughout to be simple and obvious.

Despite the ease of use this system provides all the facilities needed for complex data handling problems. The length of database that can be handled is only limited by the total space on the disc. You can have up to 20 fields with page length records up to 254 bytes in length. Adding and deleting records, amend titles, field names and records. Sort on any field and search for any record or group of records in any field. The database may be re-formatted after creation, the system will re-write all your files for you automatically. You may add extra fields and extend the length of existing fields freely. Output formatting is very powerful. You are allowed 40, 80 or 132 column output modes going to printer or screen. Selected fields can be put in any order on the screen or printer, either across the paper or down. Output can start or stop anywhere in the file. Decimal fields are automatically totalled and records output are counted. Version 2, now on sale has improved input and amendments procedures giving full record edit as well as the 3 extra features... String searching. Calculations on numeric fields, and the ability to create sub files from your main files.

On disc at **Only £17**
(Please specify 40 or 80 track when ordering)

FILE-PLUS

The File-Plus package is even more powerful and flexible than Disc-Data. It is also largely menu driven but has its own command language for file searching. The 16K ROM contains all the normally required routines, with lesser used options supplied on the utilities disc. All input and output formatting is controlled through screen forms. A full screen editing system is used to define a form which allows tremendous flexibility in the format in which your data is displayed. It is very easy to change from form to form so that you can type in your data with one form, and examine it with others. You will typically design several forms before starting to access the database so that you can quickly and easily see the fields of each record that you want to appear in the layout you decide on. The form system is also used for output to your printer. File Plus has a unique file linking system that allows the entire on-line storage of your system to be used for one database. This can give around 1.5 Megabyte databases using dual drives and double density. The built in FQL (File-Plus Query Language) can be used for searching the database. Presented in the form of a powerful command language with looping facilities etc. this allows the most flexible access to your data possible. Full arithmetic operations are provided to allow the system to be used for statistical analysis.

Cont.

Operations supported are -, +, *, /, + - 999999 9999.9999 and compare facilities =, >, <, >=, <=, < >=, < >=.

Many keywords are supported by the language: assign, compare, display, and, goto, iff, if, print, read, search, spool and update. Supplied with a very detailed 70 page manual to explain all the facilities with many examples.

Only £43

(Please specify 40 or 80 tracks for the utilities disc)

DATAGEM

Gemini's 24K ROM based DATABASE Management System

Special Offer: **£110**

PEN PAL - VERSATILE LIGHT PEN SOFTWARE

Do you have a light pen that never gets used? Then this piece of software is for you. This package offers many useful facilities that make the light pen a useful device to own. Facilities included are:

- Pixel, Line and Character definition
- Free hand drawing
- All Colours
- Fill, Refill and stripes
- User defined "Brush strokes" plus character definer
- Grid, Scale and perspective aids 2 to 200 points palletable in one design with Circles and "rubber banding"
- Move design/character to any screen position
- Save and Load screens, User defined characters and line drawings for video titles, own programmes etc.

This program has many uses in education and at home. It is supplied with a comprehensive instruction manual.

Works with Watford, RH, Acorn User, DIY and many other Light Pens.

Prices TAPE **£11**; **DISC £12**

LIGHT PEN



This Light Pen for the BBC micro is packaged in a neat pen shape with built in switch. Supplied complete with our sophisticated Pen-Pal software on cassette (see elsewhere in this ad).

Only £20

(For software on disc please add £2)

DISC EXECUTOR

Disc Executor is a sophisticated disc utility for the transfer of your cassette programs to disc. If you have difficulties transferring your cassette software to your disc system then this is the answer. It handles 'locked' files and full length adventures (up to &E blocks) and programs that load below &E00. It is very simple to operate with instructions supplied. It saves you time and money. (Compatible with Single density Disc Interfaces only.)

Price £10


(Please specify 40 or 80 track discs)

ADE

'Systems' complete program development package in a 16K ROM. Full assembling and debugging facilities provided.

SPECIAL OFFER ONLY £43

ROM MANAGER

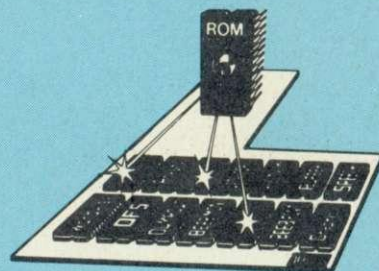

'Provides comprehensive management of all your installed ROMs - BEEBUG Nov. '84'. This ROM is unique in its capabilities. It allows you, the user, full control over the BBC Micro's sideways ROM paging system with simple to use commands. This ROM is essential for those with several ROMs. At a simple level ROM MANAGER can be used to remove the problem of clashing command names and allow full use of all the facilities of your ROMs. This is coupled with facilities to completely enable or disable various ROMs in the machine including ROM manager itself.


ROM MANAGER can also be used to develop sideways ROMs using the machine's standard memory. This is achieved by sending sideways ROM calls to your code in RAM, saving the expense of fitting sideways RAM for ROM development purposes. ROM status reports are also given by the ROM, including ROM lengths, checksums, entry points supported and current filing system title.

The ROM also provides facilities to examine ROMs, list function keys for editing, modify RAM (using a HEX/ASCII editor) and list ROM titles neatly and concisely.

All selection between particular ROMs is by the name of the ROM and this may be abbreviated for convenience. ROM numbers can also be used if required. This ROM is very simple and obvious to use. All the facilities are explained in the clear and detailed manual.

Price £22

BUFFER & BACKUP ROM

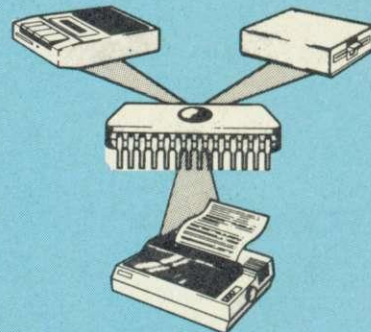


For those with sideways RAM fitted in their machines this utility ROM will make full use of this facility. By using the sideways RAM area for extra memory the following features are implemented:

- ★ 4K or 16K buffer for parallel printer.
- ★ Dumps selection of Disc files to Tape.
- ★ Makes backup copies of tapes on to tape and disc.
- ★ Displays contents of paged ROMs on screen.
- ★ Menu display of ROM filing system contents on Shift-Break.
- ★ Comprehensive manual.

Only £22

BEEB MON



Watford's own Machine code Monitor ROM written by Andrew Bray (Cambridge), co-author of the BBC Micro Advance User Guide.

The most powerful and versatile machine code monitor ROM yet written for BBC Micro. It has all the normal memory editing, moving and relocating facilities, plus all editing is with a full screen editor allowing scrolling up and down memory, entering in Hex, ASCII or standard assembler mnemonics. In use as a debugging tool, you run code under a total emulation system. Ever felt a desperate urge to set a break point in ROM? No problem - you can even have breakpoint on reading or writing locations in memory and on register contents. The system fully supports debugging of sideways ROMs e.g. BASIC can fully and easily be run from within Beebmon and from there DFS and other sideways ROMs can be used in total emulation mode. Beebmon can even run itself. In so doing you can nest Beebmon up to a level limited only by the memory size. Beebmon uses 256 bytes of workspace, located anywhere in memory, even on the 1MHz Bus. Beebmon effectively uses no zero page workspace, so your program (e.g. BASIC) can use any or all of the base page. How does it achieve this? By providing a 6502 interpreter all programs running under it exist in a virtual BBC, so special memory locations like the ROM latch are not actually accessed by your programs, instead they alter a location in Beebmon's workspace. Emulation also allows immediate return to Beebmon command level by ctrl-escape no matter what code is being executed at the time. All this exceptional power and flexibility is complemented by a clear and detailed manual included in a value for money price of:

£24

Disassembler Rom



DISAS 18	---	LTA
DISAS 15 18	---	LTA 18
DISAS 80 52 03	---	NR 0352
DISAS 85 18	---	STA 18
DISAS 85 17	---	STA 17
DISAS 80 53 03	---	NR 0353
DISAS 10 04	---	DP1 0163
DISAS 38	---	SIC
DISAS 8C 03 03 11	---	JNB 013503
DISAS 48 01	---	LSR 01


Discover the hidden secrets of BASIC and the OPERATING SYSTEM with this easy to use programmers tool.

A ROM based machine code Disassembler for the BBC micro. It enables machine code programs to be listed in BASIC/DUMP format and thus is the perfect complement to the built in assembler. It allows Sideways ROMs, files on disk or tape to be listed, and also has a comprehensive editor, allowing mnemonics to be altered directly, as well as HEX, DECIMAL ASCII and BINARY memory editing. There is also a full set of labelling facilities available (up to 3,200 labels), with the major locations and routines already labelled.

Thus DIS-ASM enables any monitor program, such as BEEBMON to be used to much greater effect as it is not necessary to disassemble memory each time the display is altered.

ONLY £18

32K RAM EXPANSION BOARD

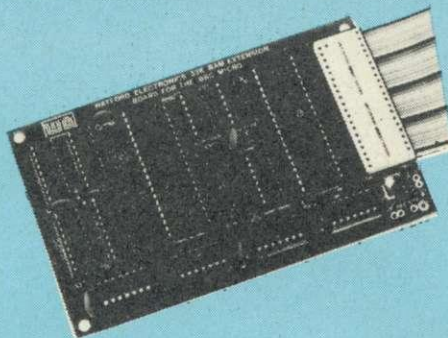

Now Watford Electronics brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. It's ribbon cable simply plugs into your micro's 6502 processor socket. This compact board which fits inside the computer doesn't just give you 16k or even 20k of extra RAM, but a massive 32K!!!

There are many more useful facilities available with this board:

- The top 20K of the expansion RAM can be used as the screen display memory, leaving all the standard BBC RAM free for programs or data storage. This allows good graphics and long programs to be combined. For instance you could have MODE 0/1/2 GRAPHICS AND 28K OF PROGRAM SPACE. The extra memory can be used by virtually any language or utility such as BASIC, VIEW, WORDWISE (1.20+), WORDWISE-PLUS, etc. and NOW COMPATIBLE with Beebug's TOOLKIT.

- The FULL 32K or the bottom 12K of the expansion RAM can be used as a PRINTER buffer for SERIAL PARALLEL printers, sound channels, RS423, keyboard or speech synthesiser. This allows very long text files to be printed while you are using 28K of program and 20K of graphics! THE BUFFER IS UNIQUE because it replaces one of the BBC Micro's buffers so all the buffer options are available on it. eg. *FX15.21, 138, 145, ADVAL(-no.) etc.

- This board is the IDEAL COMPLEMENT to any WORD PROCESSING system, disc or cassette based. There is no need to wait for slow printers as you can type in long text in 80 column display mode while printing is going on - TWO JOBS DONE SIMULTANEOUSLY!!! (an equivalent printer buffer would cost you £120 +).

- Unlike our competitors, the board is compatible with a vast range of software and hardware available for the BBC microcomputer, including our ROM expansion boards, double density DFS units, and the ATPL ROM extension board. This is because our board is connected to the computer by means of a ribbon cable without soldering. It can either be left in the micro or stuck to the lid with the 4 self adhesive feet supplied.

- The board comes with a comprehensive manual and ROM based software with a large range of commands for machine code and BASIC users, including many *HELP messages.

- Now the ROM has had a host of utilities added to the large number already provided and has been made even easier to install.

Only: £65

GRAPH PAD

With this popular British Micro's Graph-pad, you can add new dimensions to your computer enjoyment. It helps you to create your own application programs by the simple use of the Graphpad. Ideal for Educational use. Supplied complete with Cables, Manual and a two program cassette.

SPECIAL OFFER £86


BEEBFONT ROM

BEEBFONT is a remarkable and different concept in BBC software supplied on a 16K ROM. It allows you to display text on the screen in 13 different styles:

It works in modes 0, 1, 2 and 4 using the full colour capabilities of each mode. Characters are printed in the same way as normal. Selection between the various fonts is very easily achieved with Ctrl-V - press this followed by a font number and the output will continue in the new font. Beebfont ROM is particularly useful in display work with the characters produced at twice the normal size. You can create your own character fonts with the editor supplied. You can also print-out pre-formatted text files using the special characters with Epson FX, RX and NEC printers. The full range of character styles can be used, controlled from within the text. The editor and spooler program are supplied with the package, on cassette or disc. The spooler allows word processor (Wordwise & View) output to be printed in the new characters. A twenty page manual is supplied. Please state printer type and media for the editor & spooler when ordering (cassette, 40 or 80 track disc).

**SPECIAL PRICE
ONLY £32**

Mk-2 13 ROM SOCKET EXPANSION BOARD

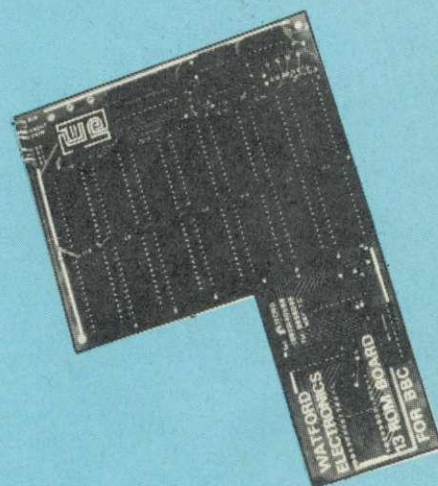

Now all lines fully buffered - On board battery back-up facility - will now accept EPROMS 2716, 2732, 2764 & 27128 and ROMs 6116 & 6264.

Simply plugs into one of the four ROM sockets currently available in BBC Micro. There are only 5 solder connections to be made. Full instructions are supplied. Unlike other ROM Boards, this board has been ergonomically designed to enable the user, easy further expansion inside the Micro, e.g. Double Density Board, Torch Board, RAM Card, etc., without any clash. (At Watford, we think ahead). Our Mk2 13 ROM Socket Board enables the User to increase the sideways ROM capacity from the basic 4 sockets upto full 16 capable of being supported by current operating systems. In addition the board is designed with the facility to hold upto 16K RAM, which when switched into operation is automatically selected by any WRITE signal to the Sideways ROM area. This gives the User the ability to write a utility or language and upon pressing break have the utility or language up and running (new ROM software can be developed and tested in situ.)

The Board gives the User, plenty of freedom to explore the possibilities of the new paged ROMs due in the coming months and offers them the chance to develop their own.

All lines are fully buffered and the board meets or exceeds all timings for operation in the BBC Microcomputer. When fully populated, the ROM Board consumes less than half the recommended maximum current limit.

Supplied ready-built and tested complete with fitting instructions.

SPECIAL OFFER: £30

Continued ▶

COMPUTER CONCEPT'S ROMS

CARETAKER Basic Utility	£28
Graphics ROM	£28
Disc Doctor ROM	£28
TERMI	£27
COMMUNICATOR	£58

Wordwise


Without doubt a very sophisticated piece of software for the BBC Micro. It has all the features of a professional word processor yet is easy to use.

SPECIAL OFFER THIS MONTH: £32

WORDWISE PLUS

Now available from stock **£49**

SIDEWAYS ZIF SOCKET

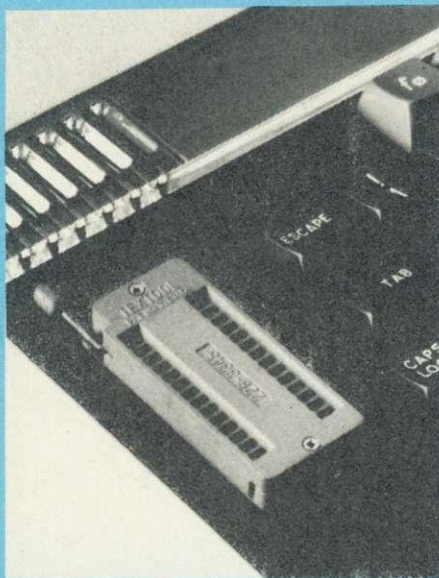

Now Watford Electronics brings you a ROM board for small budgets or for those of you who do not wish to open up your Micro frequently. It allows you to change ROMs quickly and efficiently with the minimum of effort - no screws to loosen or keyboard to remove. The unit consists mainly of a zero insertion force (ZIF) socket on a small circuit board which is located into the position of the 'ROM Cartridge' and is connected to one of the internal ROM sockets via a ribbon cable.

● Very simple to install. NO SOLDERING REQUIRED. The ZIF eliminates the possibility of damage to your ROM pins when inserting and extracting them.

● The low profile of the socket allows unrestricted access to the keyboard, unlike other cartridge systems. In addition, there are no costly extras, such as ROM cartridges for every new ROM.

● All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.

● This versatile hardware solves the problem of running out of socket space, simply unplug the ROM and plug in a different one. It is a real must for Professionals and Hobbyists alike.

ONLY £18

WORDWISE PLUS UPGRADES

Existing users of Wordwise can upgrade to WORDWISE + for £17. Please return the old WORDWISE package complete with Chip and MANUAL with your remittance and we will send you the new WORDWISE + package.

£17


BEEBUG SOFT

SLEUTH ROM	£25
TOOLKIT ROM	£23
ACORN 1.2 DNFS ROM	£15
ACORN 1.2 OS ROM	£10
ACORN BASIC 2	£20

APPROVED for use with telecommunication systems run by British Telecom in accordance with the conditions in the instructions for use.

MODEM 84 PRESTEL TERMINAL

For the BBC Microcomputer



The Watford Prestel package consists of the B.T. approved Watford MODEM 84 (1200/75 baud full duplex 1200 baud half duplex direct connect) and a very sophisticated Prestel Terminal ROM. Please write-in for full technical literature.

PRICES

MODEM 84 (with Lead & Manual)	£55
MODEM 84 complete with PRESTEL SOFTWARE ROM, Lead and manuals	£75
PRESTEL SOFTWARE ROM + Manual	£20
USER to USER 1200 BAUD SOFTWARE ROM	£18
(At these incredibly low prices for such a sophisticated BT Approved Prestel Terminal, Modem 84 has to be the best buy around)	
(Carriage on Modem £2)	

Nightingale Modem

Now Watford brings you PACE's NIGHTINGALE MODEM PACKAGE including the popular Commstar ROM software for the BBC Micro. Nightingale is considered to be by far the most versatile BT approved modem available at the price for the BBC Micro. It is ideal for home or business use. It offers Prestel/Viewdata baud rates (1200/75 & 75/1200) as well as 300/300 baud full duplex for communication between BBC and other computers, including bulletin boards. A bargain at our

SPECIAL INTRODUCTORY OFFER

(Price includes COMMSTAR ROM & comprehensive manuals)

£119

COMMSTAR ROM package

£29

NEW LAUNCH

16K DISC RAM

This is the RAM you've been waiting for! This battery backed up, write protectable 16K sideways RAM board allows you to run from disc every sideways ROM available. Beware of other sideways RAM boards which are not backed up as certain ROMs will not run in these boards even though the RAM can be write protected. The Battery Backup facility allows retention of DATA after power off. On switch on the Micro will think the WATFORD DISC RAM is a ROM. Features available are:

- No soldering or modifications to BBC micro necessary.
- Plugs into normal ROM socket fitting neatly under the keyboard allowing room for other add-ons.
- Easy to use. Comes with disk based software to SAVE and LOAD ROMs. Allows you to make backup copies of your ROMs.
- Disk software can be copied onto other discs when disc is full.
- All existing ROMs can be stored on disk and used in DISC RAM.
- No messy plugging and unplugging of your ROMs. Simply Load the one you want into DISC RAM.
- Ideal for Professional users to develop ROMs. Backup facility allows testing of final versions without using EPROMs.
- The switch provided allows backup and write protection to be switched off externally.
- Can also be used as 16K printer buffer RAM.

Only: £39

P.S. 16K DISC RAM Board is not designed to work in conjunction with a Sideways ROM Board.

Versatile BEEB SPEECH SYNTHESISER Unit



SIMPLY the best! - An unlimited speech synthesis system. Complete with easy-to-follow manual. Controlling software is in ROM so no Cassette Loading problems!

PHONEMES for word synthesis - That means unlimited vocabulary! No extra speech dictionary chips to buy!

BUILT-in Library of approximately 500 words to get you started.

ENGLISH accent - Utilises inflexion techniques to produce highly comprehensible speech.

EASY to use system - Just plug the software ROM into a socket, the Speech unit into the User Port, and away you go! No specialised 'dealer upgrade' required!

COMPACT unit - The whole system is built into a small case - easily tucked behind the computer. Auxiliary output socket provided for direct connection to an external amplifier.

HOURS of fun! - Suitable for any application - Games, Educational Programs, Specialised Packages.

We know this all seems too good to be true but **DON'T BE LEFT SPEECHLESS!** Order your Versatile Speech Unit now!

SPECIAL OFFER £35

BOOKS (No VAT on Books)

30 Hour BASIC (BBC Micro)	£6.95
35 Education Programs for BBC	£6.95
40 Educational Programs for BBC	£5.95
100 Programs for BBC Micro	£6.95
6502 Application Book	£11.95
6502 Assembly Language Program	£13.95
6502 Assembly Language	
Subroutines	£14.25
6502 Machine Code for Beginners	£5.95
6502 Machine code for Humans	£7.95
A young persons guide to BBC Basic	£4.50
Advanced Machine Code Technique	
for BBC	£7.95
Advanced Programming for the	
BBC Micro	£6.95
Advanced User Guide for	
BBC Micro	£11.95
Advanced Graphics with BBC	£9.95
Advanced 6502 Programming	£12.45
Assembly Language Programming on	
BBC Micro	£7.95
Advanced Programming Techniques	
for the BBC Micro	£7.95
BBC BASIC for Beginners	£7.95
BBC BASIC	£5.95
BBC DIY Robotics & Sensors	£6.95
BBC Forth	£7.50
BBC MICRO add on guide	£6.95
BBC Micro An Expert Guide	£6.95
BBC Micro Book BASIC Sound &	
Graphics	£7.95
BBC Micro Graphics and Sound	£6.95
BBC Micro Programs in Basic	£5.95
BBC Micro ROM PAGING System	
Explained	£2.00
BBC Micro Revealed	£6.95
BBC Micro Disc Companion	£7.95
BBC Micro in Education	£6.50
Basic Programming on BBC Micro	£5.95
BBC Software Projects	£5.95
Brain teasers for BBC micro	£5.95
CP/M Handbook with MPM	£11.95
CP/M The software BUS	£8.95
Creating Adventure Programs on	
BBC Micros	£6.95
Creative Animation & Graphics	£7.95
Creative graphics on BBC Micro	£7.50
Complete Programmer for BBC	£5.95
DISC FILING SYSTEM (DFS)	
Operating Manual for BBC	£6.95
Discover BBC Machine Code	£6.95
Discover FORTH	£13.95
DIY Robotics & Sensors with BBC	£6.95
Easy Programming for the	
BBC Micro	£5.95
Exploring FORTH	£6.95
Further Prog. for BBC Micro	£5.95
FORTH on the BBC Micro	£7.95
Forth Programming	£14.40
Functional Forth for the BBC Micro	£5.95
Games BBC Computer Can Play	£6.95
Getting more from your	
BBC & Electron	£6.95
Graphs & Charts on BBC Micro	£7.50
Graphic Art for BBC Computer	£5.95
Handbook of Procedure & Functions for the	
BBC Micro	£6.95
Introducing the BBC Micro	£5.95
Introducing LOGO	£5.95
Introduction to PASCAL	£14.95
Let your BBC teach u to program	£6.45
LISP	£9.25
Logo Programming	£8.95
Mysteries of DISC DRIVES and DFS	
REVEALED	£5.95
Mastering CP/M	£13.65
Programming the 6502	£11.95
Programming the BBC micro	£6.95
Programming the Z80	£14.95
Programming with Graphics	£5.95
Structured Prog. with BBC BASIC	£6.50
The Complete FORTH	£6.95
The Complete Programmer	£5.95
The Epson FX/KAGA PRINTER	
Commands REVEALED	£5.95
Using Floppy Discs with BBC Micro	£5.95
Using BBC Basic	£6.95
Wordstar & CP/M made easy	£6.95

Watford brings you

THE AMX MOUSE

'The program is simplicity itself and the user manual is virtually redundant' ... Micro User Jan. 85.

Bring into your home or office the last word in user friendly input devices for the Beeb. The AMX MOUSE that won the hearts and the minds of thousands of visitors at the Show has arrived at Watford Electronics at a very special price!

Using simple icons, and small movements of the mouse on a work surface, you can select any one of the functions from the pull down menus. The mouse will operate from within Wordwise, View and many other software packages. The three buttons built in to the mouse are user programmable for many extra functions.

The package consists of the mouse, the advanced controlling software in ROM and a disc containing the Icon designer and the AMS ART software.


To summarise this superb product a comment passed by a very senior authority on BBC micro at the last Micro User Show was, 'My only criticism of the product is that, IT'S TOO CHEAP!'



OUR SPECIAL INTRODUCTORY
OFFER PRICE

ONLY: £68.50


PLINTHS FOR BBC MICRO AND PRINTERS

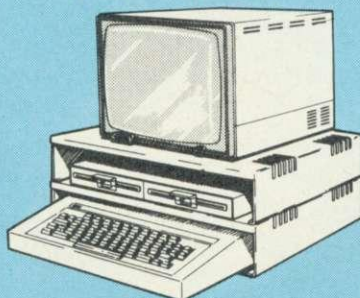

Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and paper separately.

SINGLE BBC PLINTH	£11 (carr. £1.50)
DOUBLE BBC PLINTH	£20 (carr. £2.00)
PRINTER PLINTH	£10 (carr. £1.50)

EPROM PROGRAMMER

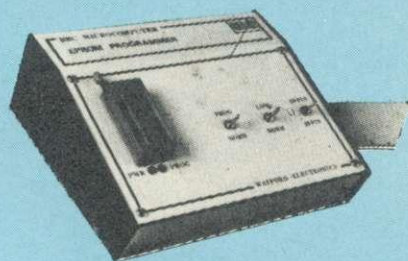

The Watford Electronics' EPROM programmer for the BBC micro is a high quality self contained package. Programs all popular EPROMs from 2K to 16K: 2716, 2516, 2532, 2564, 2764 and 27128. All manufacturers' specifications have been followed to program EPROMs at the correct speed - wrong timings could destroy your EPROMs. The unit has its own power supply so does not put heavy loads on the BBC power supply as do some other units. Connects directly to the 1MHz bus following all Acorn recommendations on addressing and bus loadings.

SOFTWARE PACKAGE

The software is supplied on an EPROM which plugs into the Micro and is instantly available with a single command (no time wasting as on Cassette/disc loading). It is a fully purpose designed and integrated package to simplify ROM development. The system is menu driven with many prompts to avoid any accidents.

Software facilities include:


Load File - Save File - Down Load EPROM - Program EPROM - Verify - Blank Check - Editing of memory contents prior to programming.

Also included is an automatic system to allow Basic programs to be put in EPROM and accessed through the *ROM filing system. More than one program may be put in an EPROM. All these facilities and more are explained in the comprehensive and clear 15 page manual.

SPECIAL OFFER £69
(£3 carr.)

LOW COST 'DIN' EPROM PROGRAMMER

A high performance, low cost, self contained 'DIN' EPROM PROGRAMMER for the BBC Micro. Plugs into the BBC Micro's user port.

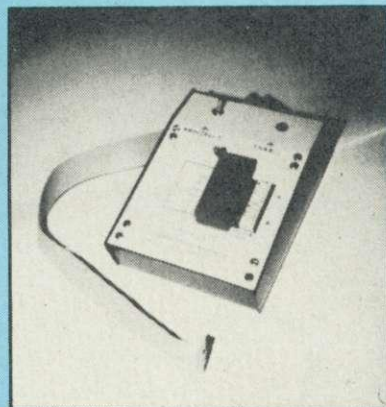

The features are:

- Will program 2716, 2732, 2532, 2764 & 27128 EPROMs.
- Copy Eprom into memory and compute checksum.
- Blank check EPROM.
- Program EPROM from memory.
- Verify programmed EPROM and display checksum.
- All * commands may be used from menu mode.
- High speed programming on 2764 & 27128.
- Machine code SOFTWARE supplied in ROM.

Price Only: £49.50

Continued ▶

ANTI GLARE MONITOR SAFETY SCREEN



HEADACHES? TIRED EYES? Don't take pills - Use a Watford Electronics anti-glare filter!

● Made in Britain by a long established glass maker.

Available in 12" & 14" versions - please specify the exact monitor type when ordering.

Special Price: **£15.00** (carr. £1)

SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. Suitable for computers, Hi-Fi, Fridge Freezers etc. Max Surge current 2KAmp; max. Voltage 250. Essential for serious computer users.

Protection for only **£8.50**

FLEXIBLE KEYBOARD CONNECTOR

A 'Keyboard to Micro' replacement jumper lead.

£4.95

ATTACHE CARRYING CASE for BBC Micro

The Attache carrying case is attractively finished in mottled antique brown leatherette. The case is made of tough plywood, providing a very solid and safe way to carry your BBC micro. There is room provided to fit all the leads necessary behind the computer and manuals in the front. Locks supplied with two keys. Price **£12** (£2 carr.)

DATA RECORDER AND ACCESSORIES

Top quality slimline portable cassette recorder designed specifically for use with home computers. Mains/Battery operated with tape counter.

£20

DATA CABLE to connect recorder to BBC

£2.50

DATA CASSETTES

Top grade tested C12 Data cassettes

supplied in library cases **35p** each; 10 for **£3.20**.

ASSORTED CONNECTING LEADS

(All ready made and tested)

CASSETTE LEADS 7 pin DIN Plug	£2.00
to 5 pin DIN Plug + 1 Jack Plug	£2.00
to 3 pin DIN Plug + 1 Jack Plug	£2.00
to 7 pin DIN Plug	£2.50
to 3 Jack Plugs	£2.00
6 pin DIN to 6 pin DIN Plug (RGB)	£2.50

MONITOR LEADS

Microvitec RGB leads 6 pin DIN to 6 pin DIN for colour monitors.	£2.50
KAGA/SANYO Colour Monitor Leads	£5.00
Monochrome monitor leads BMC to Phono	£3.00

DISC DRIVE POWER LEADS


Supply from BBC power supply to standard Disc Drive connector.

Single **£3.00** Dual **£3.75**

MISCELLANEOUS CONNECTORS

	Plugs	Sockets
RGB (6 PIN DIN)	30p	45p
RS423 (5 pin Domino)	40p	50p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	20p	30p
Paddles (15 pin 'D')	110p	215p
BBC Power Plug 6 way	80p	-
Disc Drive Plug 4 way	75p	-

4 WAY MAINS DISTRIBUTION SOCKET



4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals. Allows the whole system to be switched on from one plug.

£9.50

THE INVESTIGATOR

This sophisticated Utility program on disc, enables you to make security back-up copies of most of your valuable Disc Software. Makes full use of all 8271 facilities to discover the precise format of your protected disc so that an exact copy can be produced. Supplied with detailed instructions. Please specify 40 or 80 track disc when ordering.

Only **£20**

CHIP EXTRACTION TOOL

This extremely useful tool allows trouble-free IC removal from your computer. No longer do you have to wield a screwdriver at your valuable ROM software, instead this IC extractor distributes the removal force over the whole body of any 24 or 28 pin device, thus preventing undue damage to your chips. Isn't £1.50 a small price to pay to protect your ROMs stature?

£1.50

ADVENTURE GAMES (level 9)

COLOSSAL ADVENTURE	£8.50
ADVENTURE QUEST	£8.50
DUNGEON ADVENTURE	£8.50
SNOWBALL ADVENTURE	£8.50
LORDS OF TIME	£8.50
Please add £2.50 for Discs	

MISCELLANEOUS

28 pin ZIF SOCKET (Textool) **£6.95**

28pin DIL PLUG

SOLDER type	£2.90
IDC CRIMP type	£3

RIBBON CABLE

28way **55p/ft**; 34way **60p/ft**.

8way DIP SWITCH **£0.85**

CHIP SHOP

7438	40p	74LS00	30p
74LS04	25p	74LS10	25p
74LS123	£1	74LS163	70p
74LS244	95p	74LS245	£1.60
74LS393	£1.20	4013	60p
4020	£0.90	4816	£1.85
LM324	£0.45	UPD7002	£4.40
6502A CPU	£5.45	65C02A CPU	£9.50
6522	£3.40	6845S	£7.50
SAA5050	£8.75	SN76489	£5.50
2764-250nS	£4.25	27128-250nS	£9.75
6116LP-2K	£3.25	6264LP-8K	£9.95
8271	£55	ACORN DNFS	£15
ACORN OS 1.2	£10	ACORN BASIC 2	£20

TEX EPROM ERASERS

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

● **ERASER EB** - Standard version erases up to 16 chips. **£28**

● **ERASER GT** - Deluxe version erases up to 28 chips. Has automatic safety cut-off to switch off the UV lamp when opened. **£30**

● Spare UV tubes. **£9**

VOLTMACE DELTA 14 JOYSTICK SYSTEM

The Voltmace system provides full facilities for connecting the Delta 14 handset.

Delta 14 handset - On its own makes a high quality centre sprung analogue joystick with fire buttons **£12.50**

Adaptor Module allows use of two joysticks and provides hardware to access all the keys on the keypad of the joystick **£12.55**

Transfer program allows use of the keypad keys and joystick to simulate any key on the keyboard. This works by creating a machine code patch that stays in memory while another program is loaded in. Allows any game to be used with joysticks. Supplied on disc or tape.

Tape **£5.10** Disc **£7.95**

STANDARD JOYSTICKS

These are standard analogue type with a fire button on each joystick. Twin joysticks go to a single moulded plug, long leads provided.

Single Player version **£9.75**

Two Players version **£15.00**

SPECIAL OFFER

2764-250ns £4.25

27128-250ns £9.75

6116LP £3.25

6264LP £9.95



ACCESS HOT LINE

0923 50234

24 Hours

SOUND EFFECT (ENVELOPE) ROM

Now for the sound fanatic or those of you who want to drive the pet crazy, Watford Electronics offers you this unique piece of firmware called the Envelope ROM. It contains a wide range of sound effects, in fact enough to ZAP, BANG, SQUEAK and EXPLODE your way through a whole galaxy of games. Some of the more unusual effects include ZIT, TRIMPHONE, SNAPPER, and a whole host of explosions, gun fire, winning and losing sounds and many other effects to aid the progress of a game. A choice of over 65 sounds.

The sounds are accessed via single star commands, the pitch and duration of any of the sounds can be altered from their default value at any time by adding extra parameters.

A must for all the games designers. Supplied complete with instructions.

ONLY £18

Prices subject to change without notice and available on request.

MAIL ORDER AND RETAIL SHOP. TRADE AND EXPORT INQUIRIES WELCOME. GOVERNMENT AND EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS ACCEPTED. CARRIAGE: Unless stated otherwise, please add £1 to all cash orders.

VAT: UK customers please add 15% VAT to the total cost incl. Carriage.

SHOP HOURS: 9.00am to 6.00pm. Monday to Saturday. (Ample Free Car Parking Spaces)

ACCESS ORDERS: Simply phone: Watford (0923) 50234. (24 Hours)



Watford Electronics

Dept. AU, 250 High Street, WATFORD, ENGLAND

Tel: Watford (0923) 40588/37774 Telex: 8956095 WAELEC

New move for

White Knight

Sir, I have read with some alarm that the author of the BBC Chess, Mr Bryant, has 'defected' to Commodore and written a superior program that has decisively defeated the *White Knight*. I hope this will not preclude him from publishing an improved version of the *White Knight* soon. But I must add a plea to my earlier suggestions in your columns some months ago for a disc version, and a disc that would be compatible with the second processors. I don't mean a program that would utilise the extra memory (although this would ultimately be very much appreciated judging by the fact that *White Knight* is consistently in the Top Ten), but merely for compatibility when the second processor is connected but switched off and the micro should behave, according to the manual, normally. Well, it does *not* behave anything like normal.

I have recently purchased the Acorn Z80 only to discover that *White Knight* (and other more complex programs) will not run with the processor switched off, either in the tape version or transferred to a disc, unless the connecting cable is actually physically pulled off the Tube connector every time. At best it worked for a few minutes from cold before it crashed, but would not even load when warm.

I would be very grateful if you could offer a solution to this problem (affecting, as it does, many other computer applications when the CP/M is not needed) without having to disconnect the cable, which in my case needs two people as it is so short, and would surely wear out if the original BBC Basic and the CP/M were to be used regularly.


I would also like to know if there is any way of implementing the command *TV255 on the second processor in CP/M—I cannot read the top lines of the software provided and normally in Basic the monitor is only occasionally in need of the command so I would not like to interfere with the TV tube adjustments.

Another query is that the Z80 *MemoPlan* wordprocessor has an automatic line feed but *View* has not. Unfortunately, I cannot make the *FX6,0 com-

mand work from within *View* and so I have to choose one or the other wordprocessor or open the printer all the time. Is there a simple solution?

One would assume that the bundled software claimed to be worth £3000 should be superior, but good as *MemoPlan* is, it lacks some vital features I sometimes need—such as using the full capabilities of the printer, especially all the fonts, italics, etc, within the same text. Can this be done?

As well as line feed control problems, the wordprocessor

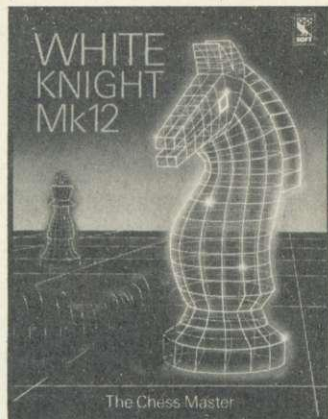

The most powerful version yet

does not appear to have any line spacing choice, unlike the printer. Is it possible to send any commands to the printer? Neither the manual nor technical assistance provided any real help.

R B Vočadlo
London

David Atherton of BBC Software replies: BBC Publications are pleased to announce that the successor to the *White Knight Mk 11* chess program was released in January. *White Knight Mk 12* is over four times as powerful as its predecessor having an estimated rating of 1850 +ELO (156 +BCF), and we expect that it will prove to be the most powerful chess program yet produced for the BBC micro. The program is available on cassette at £9.95, but a disc version, compatible with the 6502 second processor will be available soon. In answer to your other queries, no 6502 m/c software will run on a Z80 second processor, and if software doesn't know about the extra memory, or doesn't need it, then it won't use it.

Richard Boyd of Acornsoft Customer Services replies: With the Z80 second processor connected but switched off, the BBC micro should function normally and run programs

that would run as a stand-alone machine. The Z80 is totally dormant when off, and the BBC machine is unaware that the unit is still connected. However, all second processors do put a slight additional load on the BBC address and data bus, in the same way as an additional sideways ROM.

The problem could well be that your BBC micro cannot take this extra load and is unable to take the extra strain of a second processor. I would suggest that you return your machine to the dealer who sold you the Z80 for the repair necessary.

There are two ways to bring the screen down using the *TV command detailed in the BBC User Guide. First, press Break on its own and a '*' prompt will then appear. Type in the *TV255,n command and on a new line type in CPM to boot CP/M from disc. Then when you enter an application such as *MemoPlan* the screen will be moved down. The second way to do this is to use the 'STAR' utility from the Utilities Disc which allows you to enter the BBC Operating System call.

We have not come across the problem of *View* not accepting *FX6,0 when it has been entered on a command line before a Print command.


We have noted your points on *MemoPlan* and are looking forward to introducing *DocuPlan*, and an advanced printing and formatting utility will be available for purchase in the near future.

Another tune for

the Beeb

Sir, Readers of Joe Telford's article 'Orgmentation' in the December 1984 issue of *Acorn User* may be interested to know of the design for a music-keyboard interface for the BBC micro which has been developed here at the University of Lancaster Centre for Research into the Applications of Computers to Music.

This is a four octave, fully polyphonic design using a



conventional type of electronic organ keyboard which can be used to play the micro's sound system directly but is also intended to be used with the comprehensive music education software which we are currently developing. Details were published in *Electronics and Wireless World* in July and December 1984.

The Lancaster ITec. Centre has now designed a PCB for use and we will be supplying kits of parts for the interface early in the year. The price is expected to be around £60 to include the keyboard, PCB, all electronic components and connecting cable. Anyone interested is invited to send us a SAE and we will send full details as soon as they are available.

R M Adelson
University of Lancaster
Centre for Research
into the Applications of
Computers to Music,
Music Department,
Bailrigg,
Lancaster LA1 4YW

Address

unknown

Sir, In the February 1984 issue of *Acorn User*, a letter from O P Alexander of Dorset referred to the program INFORM from the Nottinghamshire Computer Centre.

Could you please tell me how I can contact the Nottinghamshire Computer Centre to obtain information on INFORM.

Joseph Day
Gloucs

Unfortunately we don't have the address, but we'd be grateful if anyone can let us have it so we can pass it on.


page 59 ►

ASK a silly question, pass a fair comment, stage an angry protest—we don't mind what you write to us about (or about us!). Keep 'em short, keep 'em sweet, but keep 'em coming! The address is: Letters, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

MICROPULSE PRODUCTS from NORTHERN COMPUTERS

Northern Computers Ltd supply & service AMSTRAD, Apple, Apricot, BBC and IBM computer systems & peripheral

MICROPULSE DISC STORAGE For the BBC Computer

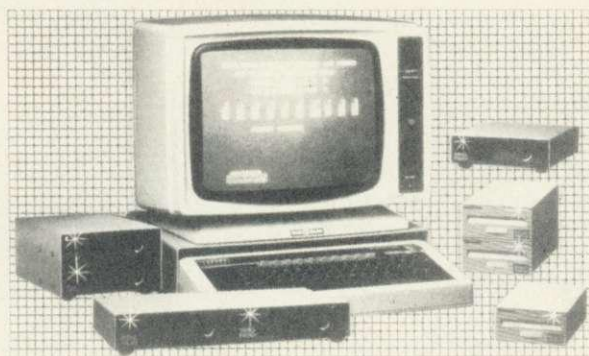

Micropulse 5.25" disc drives cased in high quality steel are fully compatible with the Acorn/BBC disc filing system and contain the highest quality TEAC mechanisms, fitted with head-load solenoids to prevent disc corruption if the computer is switched off while the disc is in the drive. All the Micropulse disc drives are supplied with BBC cables, formatter utility disc and a comprehensive 59 page disc filing system manual.

- MP100** Single 40 track (100K) disc drive which is powered by the BBC computer £110.00
- MP101** Single 40 track (100K) disc drive with internal power supply £120.00
- MP102** Single 40/80 track switched (100K/400K) double-sided drive with internal power supply £189.00
- MP200** Dual 40 track (100K) disc drives with internal power supply £239.00
- MP800** Dual 80 track (800K) double-sided disc drives with internal power supply £348.00
- MP802** Dual 40/80 track switched (2 x 100K/800K) double-sided drives with internal power supply £379.00
- Spectrum** Disc interface for Micropulse drives with power supply £89.00

3" disc drives (Hitachi/Panasonic standard)

- MP11** 3" single 40 track (100K on each side of the disc) drive powered by the BBC computer £129.00
- MP23** 3" dual drives 40 track (100K) (on each side of the disc) powered by the BBC computer £249.00



MP1 Micropulse disc filing system manual with utility disc, as supplied with Micropulse drives £6.95

Micropulse Gold Discs High quality 5.25" floppy discs packed in five packs with labels and tabs.


- MP2** Five 40 track single-sided, single density discs £7.50
- MP3** Five 80 track double-sided, double density discs £13.50

U.K. customers please add 15% VAT.
Carriage charged at cost.



**northern
computers**
micro computer systems for all applications

MICROPULSE EXTERNAL ROM BOX For the BBC Computer

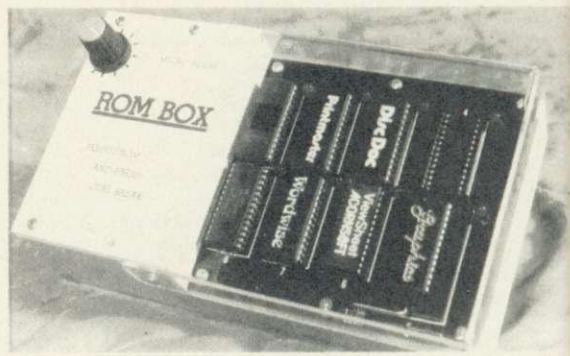

MP8 The external ROM box is now in use with BBC computer systems worldwide. It provides 8 extra ROM sockets including 1 Zero Insertion Force (ZIF) socket for easy changing of ROMs and acts as a buffered physical extension to one of the BBC ROM sockets so NO software modifications are required. The ROM sockets are isolated to avoid ROM interaction problems associated with internal ROM boards, also the external box will not overheat. It is supplied with a removable ribbon cable, and DIL socket which plugs into a BBC ROM socket and leads out at the side being clamped by the top of the computer £49.9

MP8A Spare ROM box cable + connectors £10.0


MP4 Micropulse NIGHTRIDER. A solid steel anti-theft security plinth which can be screwed to the desk in order to deter theft £25.0




MP10 Micropulse parallel printer junction box. Solid state electronic device, allows up to 4 computers to share one printer £99.0

MP21 Micropulse Mirror (on 3" or 40 or 80 track 5.25" disc) cassette-to-disc utility, transfers approx. 10 cassette-based programs to the Mirror disc £9.0

MP25 Micropulse DISC-SMITH. A powerful bit copy utility on 3" or 40 or 80 track 5.25" disc with instructions. contains:
1. high speed formatter.
2. Verify and repair facility for faulty discs.
3. Bit copier which backs up virtually any BBC format disc.
4. Sector editor £25.0



SUPERVISOR (econet ROM file server)
The fastest BBC econet file server available. Supports all BASIC radom access commands, full length files and full set of econet commands. Extra commands and utilities built-in. Uses ordinary BBC DFS discs. No complex operation or 2nd processor required £99.0



(econet is a registered trade mark of Acorn Computers Ltd.)
Retail shop open 9.00 a.m. to 5.30 p.m. Mon. - Sat.
Visa or Access orders: simply phone (0928) 35700. (10 Lines).

For further information please contact:

Northern Computers Ltd
Churchfield Road, Frodsham, Cheshire WA6 6RD.
Tel: Frodsham (0928) 35700 (10 Lines)

Do software houses condone piracy?

Sir, More than once software piracy has been discussed in your magazine and more than once software houses have expressed their wish that something should be done about it. I discovered a few months ago how much they are interested. Here in my hometown in Europe there happened to be some shops selling illegal Acornsoft and Computer Concepts software (discs, tapes and EPROMs). Now, I am not too concerned about that but what bothered me is that they passed it off as being original, and therefore asked the normal price.

I also happened to know that due to a faulty EPROM-blower they sold 'genuine' Acornsoft and CC software that didn't work. Really nice for the company's names, isn't it?

Since I didn't think the companies deserved this I decided to blow the whistle on these shops to Acornsoft and CC, so I informed them, giving the names and addresses of the shops concerned. I made it clear that I had no personal grudge against the two shops, since I never bought any software there, and therefore had no reason to feel cheated. I also wrote that if they wanted to prosecute they should contact me for further details. Neither Acornsoft nor CC answered.

This all happened in July as far as I recall and both shops are still selling copied software. So I guess that Acornsoft and CC (although the latter states otherwise in its manuals) are not really interested in prosecuting professional pirates. My advice to your readers: If you know a shop selling illegal software, buy it, don't report it, as software companies don't seem to mind. If Acornsoft or CC change their minds, they should have my letter and address somewhere.

Name and address withheld

We informed Computer Concepts and Acornsoft of the contents of this letter—here are their comments:


R B Moir of CC replied: Of course we, like all other software companies, are seriously troubled by the widespread copying of our products that we know goes on. We spend a lot of time and

money endeavouring to track down sources and obtain firm evidence of piracy with a considerable amount of success in this country. However, the added complexities of attempting legal redress abroad is daunting to say the least. We are grateful for the time and trouble taken by your reader to inform us of this matter and we have now contacted him to see if there is some way in which we could try to deal with this particularly flagrant case of piracy.

And David Johnson-Davies of Acornsoft replied: I am very concerned that we have no trace of the original letter to us, so it appears it may have gone astray in the post. I can assure you we are very concerned about piracy of our products and we follow up every case of this sort which comes to our attention. I am particularly worried about the effect it may have on our reputation since the pirated copies are seldom up to the standard of the original. In discovering evidence of such piracy we often rely on concerned purchasers like yourself and I must commend you for having taken the time to write to us.

Aviator—praise from a pilot

Sir, I must leap to the defence of *Aviator* as a flight simulator, since I believe it is quite unjustifiable for Phil Rimmer (Letters, *AU* January) to compare this program with one like *Jumbo* which deals with



Aviator—as good as flying lessons?

the vastly different problems of controlling a large jet airliner.

To me, *Aviator* models beautifully a lively, powerful, aeroplane with finger-light controls. I found few problems in taking off, finding my way around the country and doing simple aerobatics. I also managed to approach the air-

field for a landing, but as a pilot with 49 years experience, I was humiliated by my inability to make a successful landing on the runway. After much practice I can now perform this, but only on about two out of three attempts!

It is true that it is *not* good practice (to say the least!) to try to put such an aircraft onto the ground using altimeter, a.s.i. and throttle only, with a minimum of visual clues—perhaps this is what worried Phil Rimmer?

I expect other users have discovered many interesting features of *Aviator*. For example, I have found out that the lake, south of the bridge, apparently freezes over in winter. On a cold day last week I was able to land on the lake and, taxiing carefully across the ice, to pass underneath the bridge. After that I took off again towards the north from the frozen river.

I would recommend anyone to spend at least a few hours with *Aviator* before taking flying lessons.

John Simpson
Cambridge

Have you tried landing upside down? Try it—reader C Beesley assures us it can be done.

The vicious circle of Elk software

Sir, I have been most disappointed and annoyed to find so little software in the shops for the Acorn Electron, especially educational programs, and I should be glad if you could give me more information on what is available.

We are told by shops that the Electron is not a popular machine, so they do not stock the software, but it is never likely to be popular if there is so little software in the shops. We had thought this was the best computer, expecting there to be far more educational material available.


Sylvia Powers
Coleshill

K L Spence of Kosmos Software replies: The problem is nothing to do with the Elk. Basically, shops prefer to fill the shelves with games because they sell in greater quantities and therefore bring in more profit.

The problem is compounded by similar views held by most software wholesalers.

This means that even if shops want to stock educational software they will often have to buy it direct from the software houses, and they prefer not to do this because it means more accounts, more invoices, more cheques to issue, etc. Thus many shops will give you the most amazing excuses for having no educational software in stock.

The Electron is in our view still the best machine available for anyone who wants something more for their children than games. There are, of course, plenty of games available, certainly enough for



Is there a lack of educational software for the Electron?

most users' requirements. What the Electron offers (and I'm sure many shop assistants do not even realise this) is language compatibility with the BBC machine—as used in most UK schools. Thus any actual programming learnt at school may be practised at home on the Electron. A knowledge of computing and programming is of fundamental importance for our children's future—not an ability to play several thousand different games.

The views expressed in your letter concerning the lack of educational software are shared by most Electron users, and I can only offer the following advice.

Read the news items and program reviews in computer magazines; they are usually a fair indication of what you can expect a program to contain. Decide what you want to buy and ask your local shop to obtain it. Don't accept excuses and don't take no for an answer. It should take less than a week for a shop to obtain any program you require. If you have no success or if you prefer a faster response, then contact the software house direct.

Look out for our special education section, and compatible listings in *Acorn User*. [Ed]

page 60 ►

The French Econet

connection

Sir, We are a large university laboratory in Paris, with a number of BBC micro-computers which we have connected in an Econet network. We are looking for a way of using a high-capacity disc to serve the network. We have a 20Mbyte Winchester with a Xebec controller which we could use if the appropriate interface and software were available. We could possibly also purchase the new 1Mbyte or 5Mbyte floppy disc systems. The Acorn hard-disc file server has not yet really appeared, and apparently does not support a Xebec controller.

Could you give us a list of Econet suppliers please? Is there some publication which is more oriented towards laboratory use of BBC machines than *Acorn User*? It might also be helpful if you could publish our address so that anyone reading this could contact us: Groupe Regard, Laboratoire de Psychologie Experimentale, 28 rue Serpente, 75006 Paris, France.

J K O'Regan
Paris

Contact Acorn Overseas at Fulbourn Rd, Cherry Hinton, Cambridge CB1 4JN. They will be able to give you the latest details of Acorn's Winchester and Econet file servers and the addresses of any suitable dealers in France.

Seeing stars on

the screen

Sir, Thank you for printing Professor Wickramasinghe's friendly review of my BBC Soft *Astronomy* suite, (*Acorn User* January 1985).

However I too have written a 'starmap' package, published by Heinemann Computers in Education (disc only), which plots an accurate starmap of the whole, or part, of the sky as seen from any location at any time/date. The plot is in mode 0 and therefore exploits the hires graphics to the full, and the star catalogue contains 1068 stars, more than twice as many as either of the other suites reviewed.

A complete plot of the whole sky takes about two and a half

minutes, though faster plots of fewer stars are possible as they are deposited on the screen in order of decreasing brightness.

An updated version which plots planets on the starmap, allows their motion to be followed, identifies all the stars, plots nebulae and other interesting objects and marks all the constellations, will be ready in a couple of months.

John Banks
Herts

Software

sleuth

Sir, As avid readers of your magazine and newcomers to BBC computing, we write to ask for advice. In setting up a school computer literacy programme we wish to find three specific pieces of software, and wonder if you could help us find these:

1. *Animal* in which the com-

puter is 'taught' by the student to ask questions classifying information. (Introduction to databases.)

2. Spreadsheet on disc; not too many cells, but simple to operate by young students. Is there a program called *View-Calcon* disc?

3. *Mary Rose*, a database-type program (?) often referred to in *Acorn User* but without ever mentioning where it can be bought.

Peter Benson
Director of Studies
Aiglon College
1885 Chesières-Villars
Switzerland

Animal is published by Tech-media as one of eight programs in *Micro Primer* pack 1. This is subsidised by the MEP who are funded by the British Government to help introduce micros to schools (see reviews March and April 1983). It is designed for primary/middle schoolchildren and comes on cassette. Details from Tech-media at 5 Granby St, Lough-

borough LE11 3DU. Tel: (0509) 230248.

Vu-Calc and *Viewsheet* are both spreadsheets. The first comes on cassette which can be transferred to disc and costs £14.95 in Britain. It's published by Psion at 2 Huntsworth Mews, Gloucester Rd, London NW1 6DD. *Viewsheet* is from Acornsoft at Betjeman House, 104 Hills Rd, Cambridge CB2 1LQ. Tel: (0223) 316039. It comes on ROM. (See comparative review in the February issue.)

Mary Rose is a simulation/adventure package based on the recovery of a Tudor warship of the same name from Portsmouth harbour by a team of marine archaeologists. It was reviewed in the February 1984 issue and referred to in a discussion of similar material in April 1984. *Mary Rose* is designed for children aged nine and upwards and is available on disc and cassette from Ginn, Prebendal House, Parson's Fee, Aylesbury HP20 2QZ.

Safety

measures

Sir, As I was installing my sideways RAM board in my Beeb I had a glimmer of an idea regarding identifying the Beeb as a piece of stolen property. Part of the Beeb could be engraved with the owners' name, address and postcode, in several places (eg, bottom of plastic case, top of transformer case or even the top of chip marked 8313 in the centre of the PCB).

This may not be a very good suggestion as a deterrent, but it may enable the Police to return your computer to you, should it be found, instead of collecting dust in the lost property shed at the local Police station.

On another topic, I and probably many others would be very interested in some articles referring to the advanced graphics manipulation using machine code used in arcade type games. I find your articles very well worded, and much easier to understand than available books.

All in all you produce a very good magazine stuffed with useful and informative articles and deserve a pat on the back.

G Moore
Suffolk

Latest round-up of games high scores

Aviator	Acornsoft	30,450	P Hopgood*
Android Attack	Computer Concepts	1,132,985	Jon Button*
Arcadians	Acornsoft	72,820	A Norgate
Battletank	Superior	98,640	Adrian Foster*
Chukkie Egg	A&F	30,275,420	Stephen Corcoran
Crazy Painter	Acornsoft	279,790	Richard Arundale*
Cybertron	Micro Power	214,540	Mark Bradshaw*
Mission			
Fortress	Pace	117,500	D Shavick
Frak!	Aardvark	498,600	David Perry
Free Fall	Acornsoft	3,800	David Perry
Hopper	Acornsoft	44,811	John Durrans*
JCB Digger	Acornsoft	119,500	David Perry
Killer Gorilla	Micro Power	672,550	O Beman*
Meteors	Acornsoft	430,120	Malcolm Duncan
Missile	Gemini	101,125	Nicholas Jackson
Control			
Monsters	Acornsoft	257,060	Ian Cook*
Mr Ee	Micro Power	243,350	Stephen Corcoran
Moonraider	Micro Power	583,750	Lindsey Tasker*
Overdrive	Superior	338,450	David Perry
(BBC)			
Overdrive	Superior	771,520	Matthew Ede
(Electron)			
Painter	A&F	144,740	Richard Arundale*
Pengo	Watford	173,000	Damon Futter*
Planetoids	Acornsoft	2,896,500	David Perry
Pole Position	Atari	147,200	D Hughes*
Rocket Raid	Acornsoft	101,400	Keith Simms
Snapper	Acornsoft	639,260	Peter Simpson
Space	Virgin	4,680	Gareth Dykes*
Adventure			
Starship	Acornsoft	5,210	Brian Weatherill*
Command			
Zalaga	Aardvark	11,350,200	Stephen Corcoran*

* Scores unbeaten since February

CENTRAL PROCESSING... CENTRAL PROCESSING...

M Magennis, Sheffield

The 8271 disc controller chip as used in the standard BBC micro disc interface is not capable of double density format.

Philip Walton, Salford

The memory between &D00 and &DFF inclusive should not be used for any program or data storage whatsoever. This area is reserved for use by interrupt service routines and paged ROM data tables.

Dr F Crossley, Congleton

A review of the Phloopy is currently under way.

Gregory Boland, Woodley, Berks

You obviously have a corrupted disc. The disc fault at

terminated with END. ie:

ON ERROR PROCError:END

Lines 1 to 6 in the listing should be deleted as specified in the text.

Michael Smith, Swansea

Acorn will be producing an RS423 cartridge for use with the Plus-1. No release date has been announced as yet.

Piers Stainforth, Denmark

The 'byte' error occurs when you try to assemble an immediate operand that is larger than 255. For example LDA #257 would generate the error.

Ian Wills, Bristol

We hope to carry a disc special in the July issue. This should contain articles and reviews

Due to the large amount of technical enquiries we receive in the Acorn User office we are now unable to reply to individual letters. However, this new feature is intended to answer as many of your queries as possible, and should provide a useful information spot. Please keep your letters short and to the point.

00/01 suggests that it is the catalogue information that is damaged. You can retrieve your files and transfer them onto another disc using a suitable disc sector editor, such as Computer Concepts' *Disc Doctor*. You should always keep backup copies of your disc either on another disc or on a backup tape—but you know that now!

Laura Blackburn, Stourport-on-Severn

The reason you are getting a Bad filename error is because you are not leaving spaces between each item. The entire line should read:

*SAVE ISAVE 8D0 9B0 8D0

Note the spaces.

E Watleiss, Harlow

Electron add-ons are covered in the February issue of *Acorn User*.

B Beeston, Enfield

The Design listing printed in the September issue of *Acorn User* will work correctly, as it stands, on Basic 2. It is possible to use ON ERROR PROC... in Basic 2 as long as the line is

on DFSs, discs and utilities.

M Powell, Brussels, Belgium

The reason PRINT STR\$(4.7) produces 4.699999999 is not so much a bug but occurs because of the way floating point numbers are normalised and stored internally – the rounding off process. It can of course be circumvented by writing a short FN to round off to the required number of decimal places.

G Litman, Wembley

Unfortunately we do not have any further information on the Communicator at present, but watch the news pages...

T Hill, Midlothian

There are a few programs on the market that would help you with your Income Tax problems (but they won't pay the bill!) – try BBCSoft's *Tax Calc 2*, price £17.25.

Desmond Hamilton, Crieff

View will work on the Econet system, but you will still need a *View* ROM in each machine. Files can then be loaded and saved as normal using the NFS.

You ask Kitty

how to decide

which disc

drive to choose

Q I want to get a disc drive but I am unsure what all the jargon means – 40/80 format, 100k 40 track, DFS, double sided, etc.

I hope to use my micro for wordprocessing, so what would be the best disc drive to get?

Peter Smith
Essex

A First, let me say watch out for our July issue as this will have a distinct disc and ancillaries theme!

To allow your BBC micro to use discs you need a special program that provides some suitable new commands. This software is called the Disc Filing System (DFS) and is contained in a ROM chip which plugs into a vacant sideways ROM socket. There are several different makes available but the standard version is the Acorn DFS.

Many advertisements mention double density DFSs. Basically these allow you to store twice as much information on a disc than it is possible to keep on a 'standard' single density disc. This can lead to compatibility problems however, so if you decide on a double density system make sure that it can be used with *all* software.

The term 'track' refers to the number of concentric rings on the disc capable of storing information. The two main types are 40 track and 80 track. To enable the DFS to find its way around a disc and know which track is which, it must mark the disc electronically – a process termed 'formatting'. It's not possible to use an unformatted disc.

Discs may be double-sided or single-sided – in other words, you can use either both sides or one only, but this will depend on the disc drive you have. More about this in a moment.

As regards the amount of data it's possible for you to get



on a disc, a good guide is to think in terms of 100k per 40 tracks per disc side. So, a 40 track single sided disc has 100k of space, a double sided 40 track has 200k, an 80 track single sided has 200k and a 80 track double sided has 400k.

Disc drives are expensive and what you purchase will ultimately depend on what you can afford.

You can get either a single or a double disc drive – the former will accept one disc at a time and the latter will take two. A twin disc drive is nearly twice as expensive as a single one, but it is much more convenient as it allows you to copy discs easily and access two discs from one program, which is useful when dealing with databases or spreadsheets. Both of these tasks can be performed using a single disc drive, but a lot of swapping of discs is needed.

Because discs may be double sided, so may drives – again this applies to single or twin drives. It is preferable to have a twin drive rather than a single double sided drive.

The number of tracks is very important: 40 and 80 track discs are not transferable. 40 track drives are more common than 80 track ones but the latter provide you with a greater storage capacity per disc.

Most software these days is available in both formats so there should be no problems on this front.

Finally, there are switchable drives. These allow you to switch between 40 and 80 track discs. They are the most expensive but if you can afford them, the best!

As to which particular make of drive to choose, I suggest you look out for the special disc issue for advice, but there seems little to choose between them, so the one that suits your pocket and fits onto your desk will probably be the best for you.

PRINTERS

DOT MATRIX

All printers have centronic parallel interface unless otherwise stated. All printers have hi-res dot addressable graphic mode. Please send SAE for full details.

EPSON

FX80 160CPS 10" wide friction & pin feed	£347 + VAT £399
FX100 160 CPS 15" wide friction & tractor feed	£499 + VAT £574
RX80 F/T 100 CPS 10" wide friction & tractor feed	£239 + VAT £275
RX80 100 CPS 10" wide tractor feed	£199 + VAT £229
RX100 F/T 100 CPS friction & tractor feed	£385 + VAT £443
8143 RS 23 Interface for FX and RX printers	£39 + VAT £45
8148 RS 232 Interface with 2K buffer x on x off	£60 + VAT £69
Ribbon Cartridge for RX80 FX80 & MX80	£5 + VAT £6
Ribbon Cartridge for FX100 & MX100	£7 + VAT £8

MP165

165CPS 10" carriage friction and tractor feed	£260 + VAT £299
---	-----------------

SEIKOSHA

BP 420 designed for the business world, 420CPS in draft mode, 110CPS in NLQ mode.	£1095 + VAT £1259
---	-------------------

SMITH

CORONA

Fastext 80: 80 col, 80CPS. Friction feed standard	£149 + VAT £171
---	-----------------

TAXAN KAGA


160CPS 10" wide 27CPS NLQ 24 x 16 matrix	£269 + VAT £310
160CPS 15" wide 27CPS NLQ 24 x 16 matrix	£390 + VAT £449

CANON

PW1080A
160CPS NLQ
mode, 27CPS, 10"
wide friction &
tractor feed
£299 + VAT £344

PW1156A
160CPS NLQ
mode, 15" wide
friction & tractor
feed

£399 + VAT £459

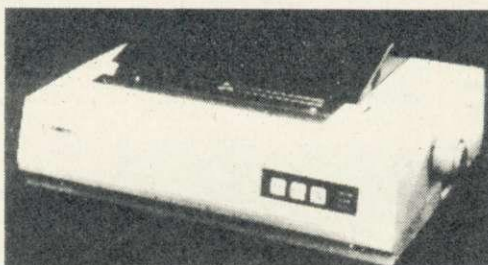

COLOUR PRINTERS

Seikosha GP700A 7 colour 50CPS printer	£299 + VAT £344
Canon PJ1080A 7 colour 40CPS ink jet printer	£433 + VAT £499

DAISYWHEEL

JUKI 6100/I PRINT

20 CPS Bi-Directional Logic seeking 10 12 15 CP1	
+ PS spacing 2K buffer best selling Daisywheel	£324 + VAT £373
Singer sheet feeder unit	£182 + VAT £209
Tractor Unit	£95 + VAT £109
RS 232 Interface	£52 + VAT £59
Spare Daisywheel	£14 + VAT £16

BROTHER HR-15

13 CPS Bi-directional 10, 12, 15 CP1 + PS	£340 + VAT £399
Keyboard Unit	£139 + VAT £159
Single Sheet Feeder Unit	£217 + VAT £249
Tractor Unit	£95 + VAT £109

QUENDATA

20 CPS Unidirectional 10 12 15 CP1	£239 + VAT £275
------------------------------------	-----------------

All our printers have 1 year warranty

MONITORS

PHILIPS

7001 High Res Green Screen with sond input
£65 + VAT £75

GM1211

GM1211 18 MHZ High Res Monochrome
Monitor with tilt and swivel stand available in
green or amber etched antiglare screen
(please specify colour £86 + VAT £96)

SANYO

DMB112 12" Green screen
18MHZ Hi-Res
£86 + VAT £96

DM9112 Hi Res
Green Screen with
tilt stand
£109 + VAT £126

MICROVITEC CUB

1431 MS 14" RGB Normal Res Colour
£173 + VAT £199

1451 MS 14" RGB Medium Res Colour
£251 + VAT £289

1441 MS 14" RGB High Res Colour
£417 + VAT £479

SANYO COLOUR

Std Res 14" £179 + VAT £206
Med Res 14" £299 + VAT £344
Hi Res 14" £449 + VAT £517

MICROVITEC FOR QL

1451 14" Medium Res Colour

Specially designed for
Sinclair QL
£239 + VAT £275


ACORN

SANYO MONITOR

SPECIAL

CM 3125

colour monitor



£179 inc VAT

including free monitor stand




COMPUTER GROUP

28/29 BURNT MILL HARLOW, ESSEX CM20 2HU U.K.
Tel. HARLOW (0279) 443521 Telex: 818894 AKHTER G

DISC

100% BBC COMPATIBLE MITSUBISHI AND TEAC SLIMLINE DISK DRIVES

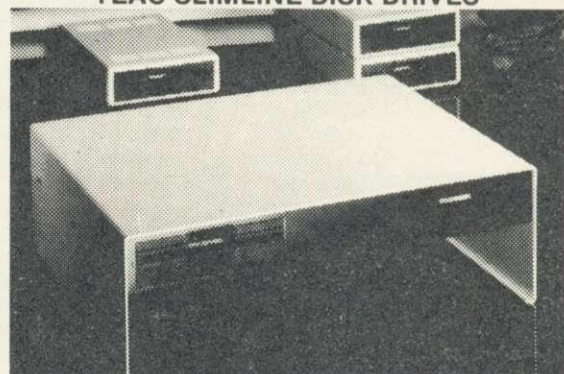

These drives are supplied ready cased with all the necessary cables formatting program and User Guide
There are some very useful utilities included on formatting disc e.g.

- * DISASSEMBLER: This is 6502 machine code disassembler
- * DUP: To copy and rename a file on disc
- * FORMAT: Formatting program for 40 & 80 tracks
- * FREE: This utility provides a disk usage analysis
- * MDUMP: Enables you to display and modify any part of BBC memory
- * MERGE: Merge a number of text files into one file
- * RELOCATE: Downloads a basic program to &E00
- * SDUMP: Screen dump for EPSON in all graphic modes
- * VERIFY: Verifies every sector on a disk
- * MENU: A flexible menu program

PRODUCTS

BBC Microcomputer Model B	£299 + VAT	£344
BBC Mod B - disk interface	£369 + VAT	£425
BBC Mod B - Econet interface	£349 + VAT	£401
BBC Mod B - disk and Econet interfaces	£409 + VAT	£471
BBC Compatible 100K disk drive	£112 + VAT	£129
BBC Compatible dual 800K disk drive	£312 + VAT	£359
Acorn Z80	£347 + VAT	£399
Acorn 6502 Second Processor	£173 + VAT	£199
Acorn Bit stick	£327 + VAT	£375
Acorn IEE Interface	£282 + VAT	£325
Acorn Electron plus 1 interface	£52 + VAT	£60
BBC Prestel Adaptor	£115 + VAT	£132
BBC Telex receiver (Aug)	£196 + VAT	£225
BBC cassette recorder and lead	£30 + VAT	£35
Disk interface kit (free fitting)	£103 + VAT	£118
Mod A to Mod B upgrade kit	£70 + VAT	£80
Fitting charge for A to B upgrade kit	£20 + VAT	£23
16K memory upgrade kit	£30 + VAT	£34
Games paddles	£17 + VAT	£19
User Guide	£15	
Advanced User Guide	£12.95	
Econet Guide	£ 7.50	
Econet interface (free fitting)	£60 + VAT	£69
Speech interface (free fitting)	£47 + VAT	£54
BBC disk manual - formatting disk	£30 + VAT	£34
Parallel printer cable	£10 + VAT	£11
BBC word processor (view)	£52 + VAT	£59

YOUR CONTACT AT AKHTER

Tel: 0279 443521 (12 lines)

DEALER/BULK ENQUIRIES	HAMAYUN MUGHAL	EXT 202
TELEPHONE ORDERS	CARON ANDREWS	210
DEALER ORDERS	JULIA ALLUM	209
EXPORT ENQUIRIES	MOHAMAD EDIB	201
TECHNICAL SUPPORT	ALAN LAFFOLEY	207
ACCOUNTS	JULIE AMBLER	211
LITERATURE REQUEST	JOHN MAULE	201

ORDERING INFORMATION

We accept official orders from UK Government and Education establishments. Carriage is £2.50 + VAT (UK only) for normal delivery. If express delivery is required please add £8.00 + VAT per parcel. We accept telephone orders on Barclay and Access card please ring (0279) 443521 (10 lines). All cheques made payable to AKHTER INSTRUMENTS.

N.B. All prices are subject to change without notice and are rounded up to the nearest pound

OPENING HOURS: MON-FRI 9am-6.30pm, SAT 10am-5pm.
We welcome callers, no parking problems.

DRIVES

Single drive 100K 40 trks single sided	£86 + VAT	£99
Dual drive 200K 40 trks single sided	£164 + VAT	£189
Single drive 200K 40 trks double sided	£121 + VAT	£139
Dual drive 400K 40 trks double sided	£239 + VAT	£275
Single drive 400K 80 trks double sided	£152 + VAT	£175
Single drive 400K 40 80 trks switchable DS	£155 + VAT	£179
Dual Drive 400K + PSU + built-in monitor stand	£260 + VAT	£299
Dual drive 800K 80 trks double sided	£303 + VAT	£349
Dual drive 800K 40 80 trks switchable DS	£312 + VAT	£359
Dual Drive 800K 40 80 trks + PSU + built in monitor stand	£373 + VAT	£429

All above drives are low power slimline (0.3 A typ at + 12v and 0.4 at + 5v per drive) Normally extra power supply is not required. The BBC Computer power supply is designed to drive to low power drive (IT IS NOT DESIGNED TO DRIVE INTERNAL ROM BOARD)

SS DD disketts (10 Box) £18 + VAT £20

DS DD disketts (10 Box) £23 + VAT £26

BUSINESS SYSTEMS

COMPLETE BUSINESS PACKAGE

This system is based on 16 Bit 8088 Processor 128K RAM, 2X730K Floppy Disc Drives, High Res Monitor, fast (160cps) Dot Matrix Printer, Wordstar Wordprocessor, Calcstar Spreadsheet Program, complete integrated Accounts package consisting of Sales Ledger, Purchase Ledger, Nominal Ledger, Invoicing, Stock Control, Payroll and mailing list. Complete turnkey system at an unbelievable price.

Delivered Only £1495 + VAT £1719
Delivered and Installed plus 1/3 day training £1595 + VAT £1834

SANYO 550

16 Bit Micro, 256K Ram, Built in full colour graphics, MSDOS Operating System, Single 16K disc and free Green Monitor, free software including Wordstar & Calcstar.

£749 + VAT = £862

SANYO 550-IX

As above but with dual drives 2 x 160K
£799 + VAT = £919

SANYO 550-360X

As 550 but with dual drives 2 x 360K
£899 + VAT = £1034

SANYO 550-800X

As 550 but with dual drives 2 x 800K
£999 + VAT = £1149

SANYO 550-10MX

As 550 but with MSDOS 2.11 Operating System and a single 10 Megabyte hard disc and 360K floppy back up.

£1995 + VAT = £2295

APRICOT PC

"Portable Executive Computer" 16 Bit Micro. 256K RAM up to 1.44 megabytes floppy disk storage. 3 1/2" Sony disks. Portable brief case styling. Modem with auto dialler (optional) hard disk optional. Vast software library (compatible with Sirius Apricot with Double Drive, Monitor and Free Printer £1790 + VAT £2059)

Apricot with Double Drive, Double & Monitor & Printer £1990 + VAT = £2289

APRICOT XI

As above but with 10MB Winchester Drive and Single 315K Drive plus Superwriter, Supercalc and FREE JUKI 6100 Printer £2995 + VAT £3444



SANYO PROFESSIONAL COMPUTER

SANYO 555

16 Bit Micro, 256K Ram, double 160K disc drives, MSDOS Operating System, free Green Monitor, free software Calcstar, Infastar, Datastar etc.

£999 + VAT = £1149

SANYO 555-360X

As 555 but with 2 x 360K Drives
£1099 + VAT = £1264

SANYO 555 800X

As 555 but with 2 x 800K Drives
£1199 + VAT = £1379

SANYO 555 10MX

As 555 but with MSDOS 2.11 Operating System and a single 10 Megabyte hard disc and 360K floppy back up.

£2195 + VAT = £2525

WORD PROCESSING

COMPLETE SYSTEMS FROM £650 + VAT

BBC 1: BBC Micro Model B, View (or Wordwise) Wordprocessor, Quendata 20 CPS Daisywheel Printer, High Res Green Monitor, Cassette Recorder plus 10 cassettes and all the necessary cables £600 + VAT = £747.50

BBC 2: BBC Micro Model B + Disk Interface, View (or Wordwise) Wordprocessor, 100K Disk Drive, High Res Green Monitor, Quendata 20 CPS Daisywheel Printer, 1 Box of Disks and all the necessary cables £749 + VAT = £862.00

BBC 3: Same as System BBC2 but with 400K Drive £825 + VAT = £949.00

BBC 4: Same as System BBC 2 but with 400K Drive and JUKI 6100 Daisywheel Printer £925 + VAT = £1064.00

BBC 5: BBC Model B + Disk Interface, View (or Wordwise) Wordprocessor, 800K Dual Disk Drive (Mitsubishi), High Res Green Monitor, JUKI 6100 Daisywheel Printer, 1 Box (10) of 80 Track DS discs and all necessary cables £1095 + VAT = £1260.00

SAN 1: Sanyo MBC 550 Series 16 Bit Microcomputer, 256K Ram, Dual 160K drives (2 x 160K), High Res Graphics (600 x 200 pixels in 8 colours), JUKI 6100 Daisywheel Printer, High Res Green Monitor, 1 Box of 10 discs, Wordstar Wordprocessor, Calcstar spreadsheet and all the necessary cables £1095 + VAT £1260.00

SAN 2: Same as SAN 1 but with Dual 360K Drives (2 x 360K) £1245 + VAT £1432.00

SAN 3: Same as SAN 1 but with Dual 720K Drives £1295 + VAT £1490.00

SAN 4: Sanyo MBC 555 Series 16 Bit Microcomputer, 256K Ram, Dual 160K Drives (2 x 160K), High Res Graphics (600 x 200 pixels in 8 colours) JUKI 6100 Daisywheel Printer, High Res Green Monitor, 1 Box of 10 discs, Wordstar, Wordprocessor, Calcstar spreadsheet, Mailmerge, Spellstar (dictionary), Datastar (database), Reportstar plus all the necessary cables £1195 + VAT £1375.00

SAN 5: Same as SAN 4 but with Dual 360K Drives £1295 + VAT £1490.00

SAN 6: Same as SAN 4 but with Dual 730K Drives £1395 + VAT = £1605.00

If you require High Res Colour Monitor instead of High Res Green Monitor in Sanyo Systems please add £320 + VAT = £368 to the above prices.

*128K RAM Upgrade for all above Sanyo systems (makes a total of 256K RAM) £150 + VAT = £172.50 including fitting.



IS KEYBOARDING TURNING YOU INTO A 'MICRO MONSTER'?

Let's face it, your BBC Micro is a demanding creature. Powerful it may be, but using the keyboard is probably a lot harder on *YOUR* system than you expected — and it's all because you're forced to 'hunt and peck' amongst 74 keys, on a keyboard that's a hundred years old! It's no wonder you feel like the many-headed hydra! With your eyes being torn from document to keyboard, then to the screen for checking, and back again. Errors and bugs are bound to creep in.

Master your BBC Micro overnight with QUINKEY.



QUINKEY REPLACES EVERY CHARACTER, COMMAND AND FUNCTION ON YOUR BBC (EXCEPT BREAK), AND SIMPLY PLUGS INTO THE ANALOGUE PORT AT THE BACK.



YOU CAN TOUCH TYPE IN LESS THAN ONE HOUR WITH QUINKEY'S SIX KEYS, USING THE FAMOUS MICROWRITER TECHNIQUE PROVEN BY THOUSANDS OF USERS.



YOU ONLY NEED ONE HAND TO USE QUINKEY—AND THE LONG LEAD ALLOWS YOU TO SIT BACK, RELAX AND CONCENTRATE ON WHAT'S REALLY IMPORTANT—YOUR WORK.



ACCURACY AND SPEED COME NATURALLY BECAUSE YOU'RE TOUCH TYPING YOU CAN DEVOTE ALL YOUR CONCENTRATION TO READING ACCURATELY FROM THE SCREEN OR DOCUMENT.

Microwriter Ltd.,
2 Wandle Way, Willow Lane,
Mitcham, Surrey CR4 4NA
Tel: 01-685 0300

microwriter
QUINKEY



AND, FOR THOSE LONG LISTINGS, QUINKEY REALLY IS A MUST. BECAUSE YOU NEED ONLY ONE HAND, THE OTHER IS FREE TO FOLLOW DATA.



WHAT YOU GET FOR £49.95

1 QUINKEY KEYBOARD

Five keys (plus control key) pressed in easily remembered combinations, give all inputs except Break. Can be used in conjunction with BBC keyboard or as entire replacement.



2 QUINKEY INTERFACE

Four-channel connector for up to four Quinkeys.★



3 SELF-TEACH GUIDE

Contains everything you need to know. Instantly learned, simple mnemonics based on widely used technique of Microwriting ensure you're touch-typing in under an hour.



4 PROG & WP SOFTWARE

Supplied on cassette (User Guide shows how to transfer to disk).

PROG merges easily with applications programs. WP enables Quinkey to be used with word processing packages such as Wordwise, View and Edword.



TECH SPEC — When invoked using CHAIN "WP" or CHAIN "PROG", loads at the current PAGE value and moves PAGE up by 768 bytes. No zero-page locations required. Interrupt service vector IRQ2V, correctly chained.

TESTED COMPATIBILITY — BBC model "B" OS E.I BASIC I or BASIC II (except when using INKEY with negative argument), DFS 0.90. View A1.4, Wordwise 1.17, Edword.

PLUS TRY QUINKEY ON OUR MONEY-BACK GUARANTEE

So confident are we of our claims that we offer a 14 day money back guarantee. So act now by sending the coupon below.

To: Microwriter Ltd., 2 Wandle Way, Willow Lane, Mitcham, Surrey CR4 4NA Tel: 01-685 0300

I would like to take advantage of your special money-back guarantee and realise that I can return the pack(s) undamaged within two weeks of delivery if I am not fully satisfied for a complete refund.

Please send Quinkey pack(s) @ £59.95 (£49.95 plus VAT & p&p) £

★ Tick box ☐ More information about the educational pack of 4 Quinkeys and software for schools.

I enclose a cheque made payable to "Microwriter Ltd" for £
or debit my Visa/Access credit card No.

Signed

Name

Address

Please allow up to 28 days for delivery. Reg. No. 1374069

AU 4/85

THE LANGUAGE FOR LEARNING

Logo is a very powerful tool in teaching problem-solving skills. Joe Telford begins a two-part in-depth assessment

65

IF WE make a list of the most important skills of people in society, high on it will be the ability to solve problems. Regular readers of Jottings will know what I think of the 'If two men can dig a ditch in three days . . .' type of problem. It is a mathematical exercise and has a place, albeit a small one. In real life people come across many problems which almost always start off: 'How can I . . .' Solving these problems is often difficult for adults, let alone


solving which are general enough to be transportable. These include skills of:

- Logic/argument
- Reasoning/prediction
- Ordering/sequencing
- Hypothesising
- Testing
- Analysing
- Fault-finding (debugging)
- Design
- Recording
- Prototyping

If we can find a way of supporting these

youngsters to think 'What if . . . ?' then we have the beginnings of self-motivated learning. Those who think this doesn't occur should look at the youngsters who play advanced games like *Elite*. Better still, look at the youngsters who write such games.

Before getting carried away, we must remember that the English educational system has always placed emphasis on the position of teacher as facilitator and director of each child's

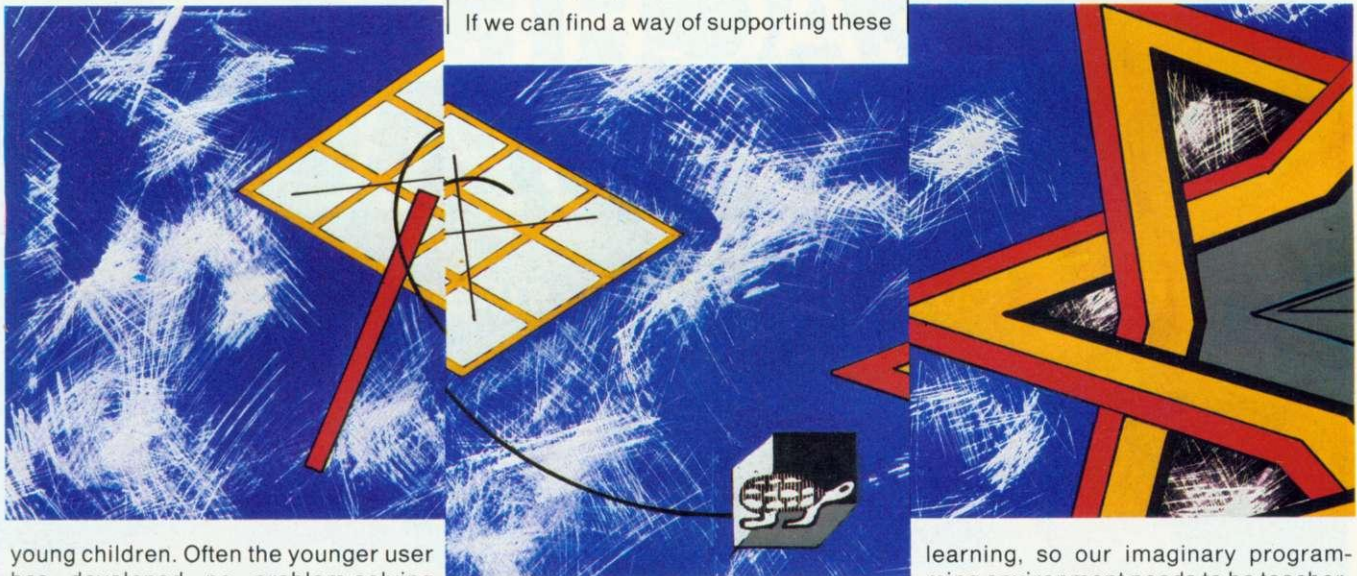

young children. Often the younger user has developed no problem-solving skills or strategies, for their development requires continual exposure to problems, as well as guidance towards the solution.

Supporting the learning of general problem-solving skills is difficult for parents and teachers alike – indeed, it has been recognised that problem-solving is a weak spot in both adults and children across the whole country. The wide differences between various kinds of realistic problems makes it difficult for children to transfer an approach for solving one problem to another problem. There are, nevertheless, many skills that support problem-

general skills then we are helping with general problem-solving. There are, of course, many ways of addressing the task of problem-solving. In the September '84 issue we considered using programming as an approach. Feedback from Secondary school teachers was quite positive, but the feeling was that the techniques involved were on a par with the abilities of 14-year-olds rather than younger children.

If we could use the programming environment with younger children then this approach to problem-solving could become valuable. If a programming environment could stimulate

learning, so our imaginary programming environment needs to be teacher-friendly, enabling him or her to manipulate it to support skills other than those mentioned above – reading, text composition, editing and spatial awareness, among others.

What is Logo?

Logo is often spoken of as the most powerful computer language for learning. The name itself derives from the Greek word for thought, and hints at the language's support for logical thinking.

Logo was conceived as part of a philosophy rather than a language. As a philosophy it encompassed much of what we have already discussed, and

The Concept Keyboard is the ideal alternative to the Qwerty keyboard, developed and tested with teachers over a four-year period, and now making a significant contribution to learning methods in schools and colleges throughout Britain.

Here are some published comments on its First and Middle School applications:

"Immediately I was aware how much concentration is improved when children are not asked to type questions."

"... lends itself to teacher devised programs ... allows even teachers who have no knowledge of experience of programming, like myself, to devise their own programs."

"... the increasing number of software publishers now producing software for the Concept

Keyboard only confirms the credibility of this most important of all peripherals for the primary school micro."

"... offers flexibility to the programmer, as any shape, object, word or character can be stuck on the keyboard overlay and assigned to a fixed code."


Originally developed by Star Microterminals Ltd., the Concept Keyboard is now manufactured and marketed in conjunction with A B Electronic Products Group PLC. For further information please complete the coupon below or contact

Conny Lindwall,
A B European Marketing,
Forest Farm Industrial
Estate, Whitchurch,
Cardiff, CF4 7YS.
Tel: 0222 618336.



A FLYING START FOR TEACHERS AND PUPILS

with the touch-sensitive Concept Keyboard

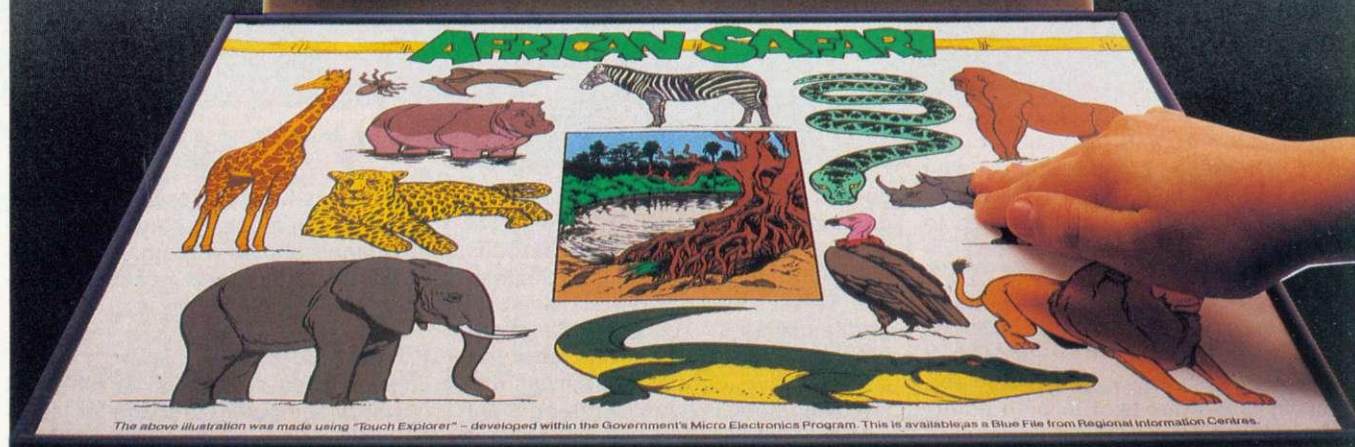

To: A B European Marketing, Forest Farm Industrial Estate, Whitchurch, Cardiff CF4 7YS

Please send me details of the Concept Keyboard.

NAME _____ SCHOOL/COLLEGE _____

ADDRESS _____

*Concept Keyboard is a trade mark of Star Microterminals Limited. Registration applied for

AUM1



yet the initial impetus for the language was to provide a tool for mathematical investigation. Certainly commentators emphasise this aspect by showing how children use turtle graphics under Logo control to produce mind-boggling patterns or to draw houses.

There is a place for this sort of 'learning by discovery' but it is important for adults to differentiate between children drawing pretty pictures and children learning a new concept. Nevertheless, Logo's turtle graphics can support both extension and consolidation of children's geometrical and spatial awareness skills. This should prove a major advantage of a programming environment available both at school and at home.

The great proponent of Logo is Seymour Papert, and users interested in Logo should find his book *Mindstorms* interesting reading. Teachers might like to consider how the ideas could be implemented in English lessons.

Logo is, in fact, a collection of general-purpose facilities designed to support the learning process. For example, the mathematical commands for arithmetic and trigonometry are intended to encourage children to use numbers without fear, to explore very large numbers, very small numbers

ally a list processing language. It takes lists of words, called objects, and processes them. The first list of words a person types at a Logo keyboard is likely to be:

```
FORWARD 100
```

and this list of two words is processed by Logo by taking the first part of the list and checking whether it is a 'primitive' word. A primitive is part of the Logo dictionary on switch-on. The word FORWARD is a recognised command, and Logo tries to process it and finds that the command needs an object to support it. This object must be a number. As we have supplied a number the whole command is obeyed and the turtle moves forward 100 units (turtle steps).

Not all primitives are commands. For example, the Logo primitive SENTENCE (called JOIN in some versions) requires two lists as inputs or objects but produces an output from itself. This output is a single list which combines the two input lists. Primitives that output a result are called 'operations'. All primitives will be commands or operations.

All objects must be either lists or words or numbers.

The following are all lists:

```
[HELLO CHEEKY HOW ARE YOU]
[SUN MONTUES WED THUR FRI SAT]
[MANN MATHEW 13 ACACIA AVE.
  CLEVELAND]
[A E I U O]
```

It's possible to have lists inside lists, eg:

```
[ [MANN MATHEW] [13 ACACIA
  AVE.] CLEVELAND]
```

has lists within a list. Readers used to data handling will see just how powerful it is to have a data record visually organised. Combine this with Logo's processing power and the creation of data handling programs could become the province of all.

Words are normally introduced by a quote mark. For example:

```
"Hello
"MON
"MANN
"13
"a
```

are all examples of words. It then becomes possible to handle these words and lists by using primitives. For example:

```
PRINT [Hello how are you?]
```

will print:

```
Hello how are you?
```

While:

```
PRINT "Hello
```

will print:

```
Hello
```

Typing:


```
PRINT "Hello "how "are "you
```

normally responds with:

```
Hello
```

followed by:

```
LOGO DOESN'T KNOW WHAT TO DO
WITH how
```

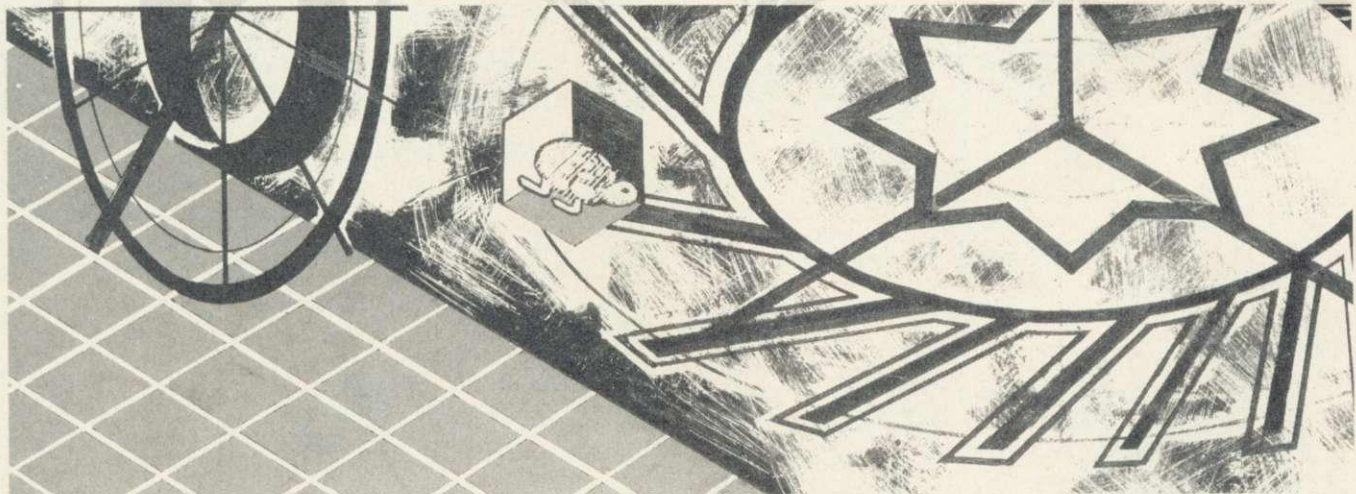

and patterns of numbers.

In many ways this aim must be now re-read with the advent of the electronic calculator, a far cheaper tool which some suggest tackles the same area of learning.

The value of Logo is that it has many facilities, and the mathematic operations are available for use not only alone, but with turtle graphics and also within the list processing area.

List processing

Although Logo is normally introduced in the context of turtle graphics, the core of the language is its facility for list processing, which offers great potential for learning. Indeed, Logo is basic-

Error messages occur whenever Logo meets something it cannot handle. In the case above, PRINT needs only one input - ie 'Hello. Once:

```
PRINT "Hello
```

is processed the Logo interpreter tries to process 'how. Because it cannot, it replies with an error message.

If we had wanted to print both 'Hello' and 'how' then we could have used:

```
PRINT [Hello how]
```


or we could have used another primitive operation


```
PRINT SENTENCE, "Hello "how
```


In some versions of Logo the primitive


LOGO


for the
BBC "B" MICRO
by
LOGO SOFTWARE LIMITED


 **LSL LOGO** grew out of a feasibility study commissioned by the Department of Industry to develop a LOGO ideally suited for educational use in Britain.

 **LSL LOGO** is the **only** LOGO to use a separator (a comma) between commands in the same line. This means that procedures in **LSL LOGO** are much simpler to understand.

 **LSL LOGO** is the easiest LOGO to debug. There are 23 error messages which pinpoint bugs with unrivalled accuracy, and 9 debugging commands, including the unique **WALK** which enables the user to execute a procedure step by step.

 **LSL LOGO** is the fastest and most efficient LOGO around. Its innovative **dynamic memory management** gives the user bigger and more flexible memory space, vastly extended levels of recursion and capacity for more procedures.

 **LSL LOGO** comes packed on a single EPROM. Future developments include floor turtle and robot interfaces, a sprite board, and a range of supporting documentation including feedback, worksheets, and a procedure dictionary.

 **LSL LOGO** is written in Assembler by a British software house. It makes full use of the BBC Micro's own operating system, and is readily accessible to advanced users wishing to customise their own LOGO.

LOGO
for the
BBC Micro

LSL LOGO comes equipped with a lavishly illustrated 232-page manual, including the **Young Person's Guide to Logo**, the full **Technical Specification**, and **Quick-reference** section.



★ FREE BOOKLET

A free 16-page booklet, **Why LOGO**, fully describes the history and the scope of the language. Write today for a copy, or ring 01-891 0989.

Please send _____ copies of **LOGO** for the BBC B
@ £67.85 including VAT and P&P.

I enclose cheque/PO for £ _____ or debit my
Access No.

Name _____

Address _____

Signature _____ Date _____

To: **LSL, 316a Richmond Road, Twickenham, TW1 2PD.**

COMPUTER MUSIC FOR HUMAN EARS

'The best music I have yet seen for the BBC Micro'.
Head of the BBC Educational Software.

M
U
S
I
C
S
O
F
T

★ THE SYNTH ★ (O.S.1.0+) ONLY £8.95

- A unique music program for musicians rather than mathematicians.
- Features include RHYTHM ALTERATION of recorded melodies.
- REPEAT FACILITY, avoiding space wastage.
- REALTIME PLAYING, enabling alterations to volume, envelope and octave pitch.
- HESITANT OR CORRECT TIME INPUT.
- NOTE STORAGE, 3000 for 1 channel: 1000 for 3 etc.
- Also incorporated, SOPHISTICATED ENVELOPE EDITING.

★ KEYBOARDS ★ (O.S.1.0+) ONLY £5.75

- 5 Programs to turn your BBC into 5 real-time keyboards.
1. 3 simultaneous voices (in Basic for easy understanding).
 2. Single voice M/C with Pitch Bend.
 3. 3 simultaneous voice M/C with Envelope control built in.
 4. Single finger Chord organ ranging over the whole keyboard, 2 variations for each chord.
 5. Chord organ 2 with different chord configuration.
- These are all separate programs designed for you to use as they are or in your own programs.

★ MUSICTOOLS ★ (all O.S.) ONLY £5.75

Five music utility programs on one tape.
Tune Generator with dynamic graphic Keyboard & Stave display. Envelope Command Explorer (Very easy to use), Musical Symbols Graphic routine. Simple single line organ with sophisticated controls. Over 60 procedures for you to use in your programs already in working programs.

Also PIEMAN, a fun set of ear cleaning and musical concentration games. ONLY £5.95.

All programs supplied on cassette. Prices include P&P and full instructions.

All 4 programs on 40 track disc £26.00.

ALL PROGRAMS TRANSFER EASILY TO DISC.

Cheques and official orders to
MUSICSOFT, Dept N, 12 Fallowfield, Amptill, Beds.
Telephone: 0525 402701.

ACORN
APPROVED

Educational Software

LCL



**BBC Micro
Electron
Tapes, 40/80 track discs,
Econet compatible.**

**Commodore 64
ZX Spectrum
unexpanded Vic
ZX 81
Apple
PET
Dragon (book only)
All software for the
above computers**

MICRO ENGLISH (BBC, Electron). Complete English Language self-tuition and revision course, to O-Level, of 24 programs. Includes "speak-and-spell" (no extras required). £24.50.

MICRO MATHS 24 program revision or self-tuition course to O-Level. £24.50 (except ZX81 £12.00).

PICTURE PUZZLES WITH LIGHT PEN (BBC, Electron). Educational tests for infants, using light pen to select colour 3D pictures. £6.50 (Light Pen £18.00).

ANIMATED ARITHMETIC Teaches using moving colour pictures (not words). Ages 3-8. £6.50 (discs £7.50).

BRAINTEASERS (BBC, Electron, CBM64, Spectrum, Dragon, Vic) Book of IQ tests and puzzle programs. £5.95.

"Excellent". EDUCATIONAL COMPUTING.

Immediate dispatch Micro Maths, Micro English and Master Maths. Phone or send orders or requests for free catalogue (200 programs) to:

*World leaders in educational software
(distributors in 24 countries).*

LCL
26 Avondale Ave.
Staines, Middx.
Tel: 0784 58771
24 hrs. Orders



TRADE, ENQUIRE
ABOUT NEW LINE

AS SEEN ON
TV

SENTENCE is called a greedy primitive. Such a primitive can take more than two inputs if parentheses are used. For example:

```
PRINT (SENTENCE "Hello "how "are
      "you?)
```

results in

Hello how are you?

Variables

In BBC Basic we are used to long (and hence meaningful) variable names. Different kinds of variables have a different final character, such as \$ for string data. In Logo, however, the only variable type is the object, and this is created using a MAKE command. For example:

```
MAKE "Bill 835174
```

would create an object Bill and associate the number 835174 with it, while:

```
MAKE "Jim "GOLIGHTLY
```

would create an object Jim and associ-

without changing data types. So it becomes possible to perform any operation on any object. If we:

```
MAKE "Phone1 427654
MAKE "Phone2 354223
```

then we can:

```
PRINT :Phone1 + :Phone2
```

to give 781877, which is arithmetic addition. Or we can:

```
PRINT SENTENCE FIRST :Phone1
      BUTFIRST :Phone2
```

which gives 4 54223, and is a complex list manipulation. Or we can:

```
PRINT WORD FIRST :Phone1
      BUTFIRST :Phone2
```

which gives 454223, and is a complex word manipulation. Notice that SENTENCE makes a list (because of the space between the 4 and the 5), while WORD makes a joined word.

Imagine we want to associate

```
PRINT "Vanda PR :Vanda PR THING
      :Vanda
```

which says print Vanda; then print the thing associated with Vanda (:Vanda); then print the thing associated with the thing associated with Vanda (THING :Vanda). The resulting printout is:

```
Vanda
Famulok
Fountains.Meadow
```



This associativity can go on and on, so that:

```
MAKE THING THING THING :Vanda
      "Spennymoor
```

is quite acceptable.

Write your own dictionary

One of the most powerful ideas of Logo is that new primitives or procedures can be created and then used as if they had always been part of the Logo core. This facility is in effect the 'programming' part of Logo. As most procedures can be put together easily, using the

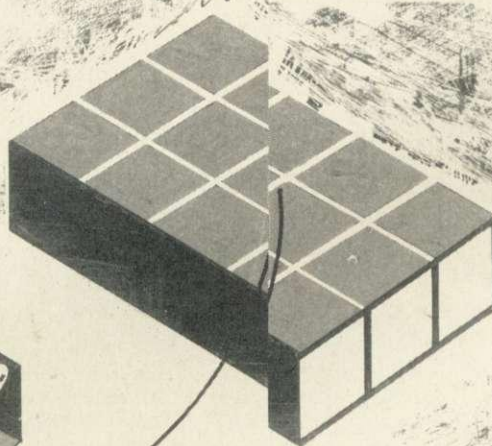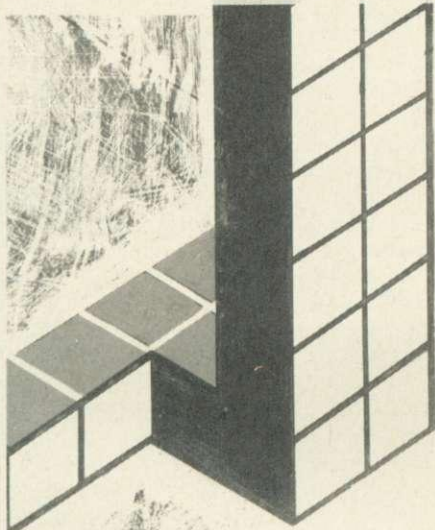

ate the word GOLIGHTLY with it; and:

```
MAKE "Record1 [ [ALAN EARL]
      GUITARZAN SOUTHBANK]
```

creates an object RECORD1 and associates a list with it. The quotation marks at the beginning of a word indicate it is a name. So typing:

```
PRINT "Jim
```

prints

```
Jim
```

To get at the item associated with Jim we normally type:

```
PRINT :Jim
```

which prints

```
GOLIGHTLY
```

One benefit of this approach is that words and numbers can be combined

several things with a name. We might first type:

```
MAKE "Vanda "Famulok
```

but Logo lets us associate a further line of address with "Famulok by defining the thing associated with "Famulok. This is done by using:

```
MAKE "Famulok "Fountains.Meadow
```

or:

```
MAKE :Vanda "Fountains.Meadow
```

because: Vanda is the same as "Famulok. To get this information back we can type:

```
PRINT "Vanda PR :Vanda PR :Famulok
```

However, this means that we need to know what is associated with :Vanda, and in a large data file this might not be the case. Logo lets us use a device to get round this. We can type:

words already defined, Logo always keeps the solution in view. Once a procedure is made it can be altered by editing it and re-tried. Using the method of hypothesis and building, followed by repeated testing and refining, children can check their own solutions to problems. Variables can also be used inside procedures, either globally or locally, or they can be sent to the procedure as parameters.

Let's use a problem to see the layout of lines in a Logo procedure:

'A secret agent receives this coded message: 77 69 69 84 65 84 84 72 69 82 69 68 80 73 71. His key is that 65 means the letter A. Can you help him decode the message?'

Because the message is a list of numbers the procedure we write must

take this list as an input. The translation should be output, so the procedure we make will be a Logo operation. In Basic we would call it a function, because it returns a value. If we call it DECODE we will eventually type:

```
PRINT DECODE [77 69 69 84 65 84 84
72 69 82 69 68 80 73 71]
```

Note that we need PRINT to display the result of the operation. The function can be considered as being sandwiched between start and finish lines:

```
TO DECODE :message
.....
.....
.....
END
```

The TO command starts the definition of DECODE, which is specified as needing one input parameter. The END line ends the definition (some Logos do not use this word, relying on a screen editor).

To decide on what goes in the sandwich we should consider a possible solution to the problem. Suggest using A as 65, B as 66 and so on and you discover that the ASCII code is in use. Now we need to write some code that will take a single number and return the character matching its ASCII value. Our first attempt might be:

```
TO DECODE :message
  OUTPUT CHAR FIRST :message
END
```

which returns the first item in the message list as a character – a good start but we need to keep doing this until all the numbers are used.

Our second attempt might be:

```
TO DECODE :message
  OUTPUT SENTENCE CHAR FIRST
    :message DECODE BUTFIRST
    :message
END
```

This works by building up a sentence using recursion to decode the first element of a list, which is made smaller each time the function recurs. Unfortunately, the routine stops with an error message, which indicates that it cannot handle an empty list. To cope with this, we add a line:

```
TO DECODE :message
  IF EMPTYQ :message [OUTPUT []]
  OUTPUT SENTENCE CHAR FIRST
    :message DECODE BUTFIRST
    :message
END
```

which concludes the recursion when the question 'Is the message list empty?' meets with the answer 'Yes'. If we now type:

```
PRINT DECODE [77 69 69 84 65 84 84
72 69 82 69 68 80 73 71]
```

we will get:

```
MEETAT THEREDPIG
```

Obviously, our secret agent might wish to generate his own code as well as receive it. This operation will allow such an activity:

```
TO ENCODE :message
  IF EMPTYQ :message [OUTPUT []]
  OUTPUT SENTENCE ASCII FIRST
    :message ENCODE BUTFIRST
    :message
END
```


and typing:

```
PRINT ENCODE
[MEETAT THEREDPIG]
```

will result in the original code:

```
77 69 69 84 65 84 84 72 69 82 69 68 80 73 71
```

One of the great values of the Logo philosophy is that we don't expect children to work from zero in a particular

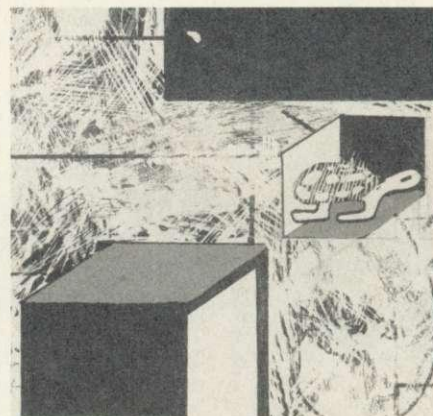

activity. Let's say that in a class of 11-year-olds, for example, we have two children who could write the operations shown above, eight who could alter them, and the remainder with whom the operations could be used. There is little point in trying to teach children to program if they are not at the appropriate developmental stage, but for those who are altering the operations to start encoding and decoding from any particular number would prove useful. There is much value in children working with the operations to encode and decode secret messages, providing it fits into the scheme of work on which the children are currently engaged.

At home of course, such 'restrictions' will not exist, and children can move between widely different ideas as the mood takes them.

Microworlds

If children use a Logo procedure that has been written as a tool for them to explore some concept or to practise some skill we say they are working within a 'microworld'. In educational terms there should be several Logo environments, each of which should be

capable of supporting a number of microworlds. A good Logo should support: 1. A maths environment; 2. A geometrical and spatial environment; 3. A general topic-based learning environment; 4. A language (English) environment; 5. An information handling environment; 6. A musical/sound exploration environment and 7. A control environment.

At present I think it possible to use Logo without much difficulty in the first two areas. Once educators become aware of the power of the Logo list processing facilities, items 3 and 4 can be tackled by microworld-based Logo tools. It seems that Logo may provide a low-cost alternative to all but a few of the expensive CAL programs currently available for schools.

Follow the turtle


It has been said that turtle graphics were added to Logo as an afterthought. If that is the case, their obvious popularity and ease of use should encourage the creators of Logo to consider similar interfaces to other areas of learning. The last three items of the above list really depend on the facilities of Logo rather than the toolmaking skill of a teacher. At present few Logos support proper file handling. All BBC Logos repeat the SOUND and ENVELOPE statements, which are unsatisfactory for most musicians, and the tools for control and monitoring return to the simple PEEK and POKE of earlier computers (with the exception that ADVAL is supported).

These problems are not found only with BBC Logos; they exist across the whole range of Logo, diminishing a very good language for learning. Perhaps the solution is a number of purpose-built extensions that will handle the areas of information handling, sound and control. In addition, some way of simplifying the methods of list processing would be useful. Already in Cleveland we are evaluating Logo-like interpreters (written in Basic) that examine sound from the viewpoint of learning about music and composition, and controlling equipment by using English sentence-based commands such as TURN THE BUZZER OFF and IF THE LIGHT-SENSOR IS DARK THEN TURN THE LAMP ON.

It would be much easier if these dialogues could be extensions to Logo rather than being written in Basic. Adding them as tools written in Logo seems generally unsatisfactory because of the slowness of the language, and because some facilities do not exist.

Next month Four Logo products compared

Join Forces

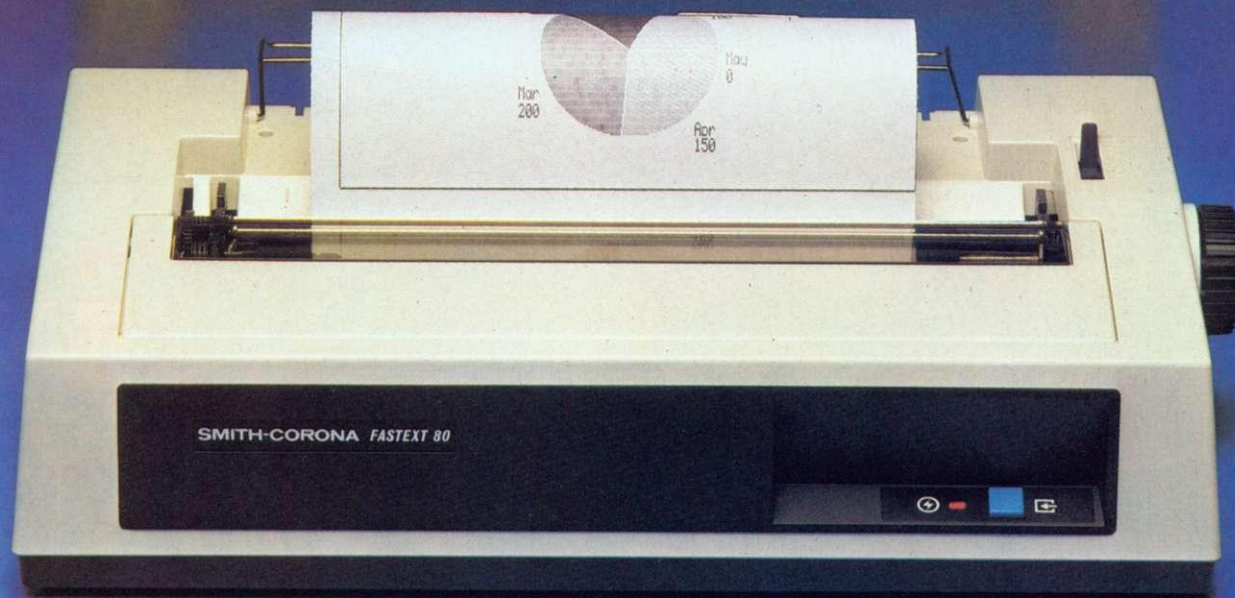

with Smith-Corona

Unleash the full potential of your computer with a printer from the Smith-Corona range. Race ahead with excellent hard copy—both text and graphics—produced by the latest dot matrix technology.

Take a closer look at the FasteXt 80. Compatible with Acorn, Apple, BBC B, Commodore 64 and most other micros and PCs, the FasteXt 80 is a fully featured printer that performs at 80 cps and boasts six pitches. Bi-directional and logic-seeking features plus a full line buffer minimise

printing time while simple paper handling is ensured with friction feed as standard, a tractor feed and roll holder being available. The FasteXt 80 is supplied with a Centronics parallel interface—a serial RS232C is an optional extra.

Link up with Smith-Corona now for the backing of their worldwide reputation and a nationwide dealer network. Make the first connection today—contact a distributor for a brochure and the name of your nearest Smith-Corona dealer.



London-Central: Universal Micros Ltd., 65 Newbank Street, London W1P 3PG. Tel: 01-631 1959.
London-West: Millbank Computers Ltd., Millbank House, Amyand Park Road, Twickenham. Tel: 01-891 4691.
Home Counties: Simmet Computers Ltd., Unit 14, St. Georges Industrial Estate, 380 Richmond Road, Kingston-upon-Thames KT2 5PR. Tel: 01-541 1495.
Wiltshire: Computercentre Ltd., Theatre Square, Swindon, Wiltshire SN4 4QN. Tel: 0793 694997.
South Wales: Barbitan Ltd., 35-38 High Street, Bristol BS4 2AW. Tel: 0272-213928.
South West: CK Computer Supplies, Unit 5, Nonside, Old Mixon Crescent, Weston-Super-Mare. Tel: 0334-418838.
Shropshire: Jentech Services Ltd., Smithfield Centre, Whitbury Street, Bridgnorth, Shrops. Tel: 07462-61458.
West Midlands: Daytron Ltd., Warwick House, Forge Lane, Minworth, Sutton Coldfield. Tel: 021-351 5959.
North East: Intac Data Systems Ltd., Frost House, Woodhouse Green, Thurstoft, Rotherham. Tel: 0709-547177.
Manchester: Mancos Computer Services, Unit 3, Albany Road Trading Estate, Manchester. Tel: 061-861 0757.
Merseyside: Rockcliff Microcomputers, 2 Rumford Street, Liverpool L2 8SZ. Tel: 051-227 2568.
Scotland: Chessbourne Ltd., 44 West Henderson Wynd, Dundee. Tel: 0382-29166.
Southern Ireland: TW Distributors Ltd., Frankfort, Dundrum, Dublin 4. Tel: 0001-728045.
Northern Ireland: Chessbourne Ltd., Hyde Park Industrial Estate, 17 Trench Road, Mullusk, Co. Antrim. Tel: 02313-43511.

Please send me:-

- ☐ further information on Smith-Corona printers
- ☐ the name of my nearest Smith-Corona dealer.

Name: _____

Address: _____

Postcode _____

Tel. No: _____

Affordable and reliable printers from **Micro P** give you more *Quality* CPS for your money

MP Micro P
CPA 80 - 100 cps
+ EPSON COMPATIBLE
CPB 80 - 130 cps
+ IBM COMPATIBLE
FROM **£199***



MP Micro P
MP 165 - 165 cps
+ EPSON COMPATIBLE
NLQ PRINTER
FOR ABOUT **£269***



MP Micro P
CPP 40 - 4 COLOUR
PORTABLE
PRINTER/PLOTTER
FOR ABOUT **£79***

Even in today's high tech world, for most of us, the written word is still the least expensive means of sending and receiving information. If you own a microcomputer the chances are that sooner or later you are probably going to need a printer in order to get into print.

Micro P — CPP40

A low cost 4 colour 40/80 column printer/plotter capable of printing text or graphics on plain paper. The CCP40 is an ideal companion for small and portable micro's, as it is fitted with re-chargeable batteries — perfect for beginners.

Micro P — CPA80

With 100 cps quality printing, the CPA80 probably gives more cps/£ than any other printer available today. The CPA80 is packed with features you would normally find on a more expensive printer. With an optional RS232 version available (even for the QL) this Epson compatible printer will hook up to almost any micro.

Buy from your local dealer today!

Micro P — MP165

Looking for a matrix printer as well as a daisywheel? Well, the MP165 combines all the attributes of these two technologies to give a matrix printer capable of printing at up to 165 cps, as well as providing crisp Near Letter Quality, (NLQ) print at 75 cps. Features include a 2k buffer as well as both friction and tractor feed, as standard. Ideally suited to most popular micro's, the MP165 is now available in a new RS232 QL compatible version.



**Micro
Peripherals Ltd**

"PRINTERS FOR ALL APPLICATIONS"

INTEC UNIT 3, HASSOCKS WOOD, WADE ROAD,
BASINGSTOKE, HANTS. ENGLAND, RG24 0NE.

Telephone: BASINGSTOKE (0256) 473232 (32 lines).


Telex: 859669 MICROP G Facsimile: 0256 461570

* Full 12 months warranty - RRP ex. VAT. QL is a registered Trade Mark of Sinclair Research.

COLOURS

BY

INTERRUPTS

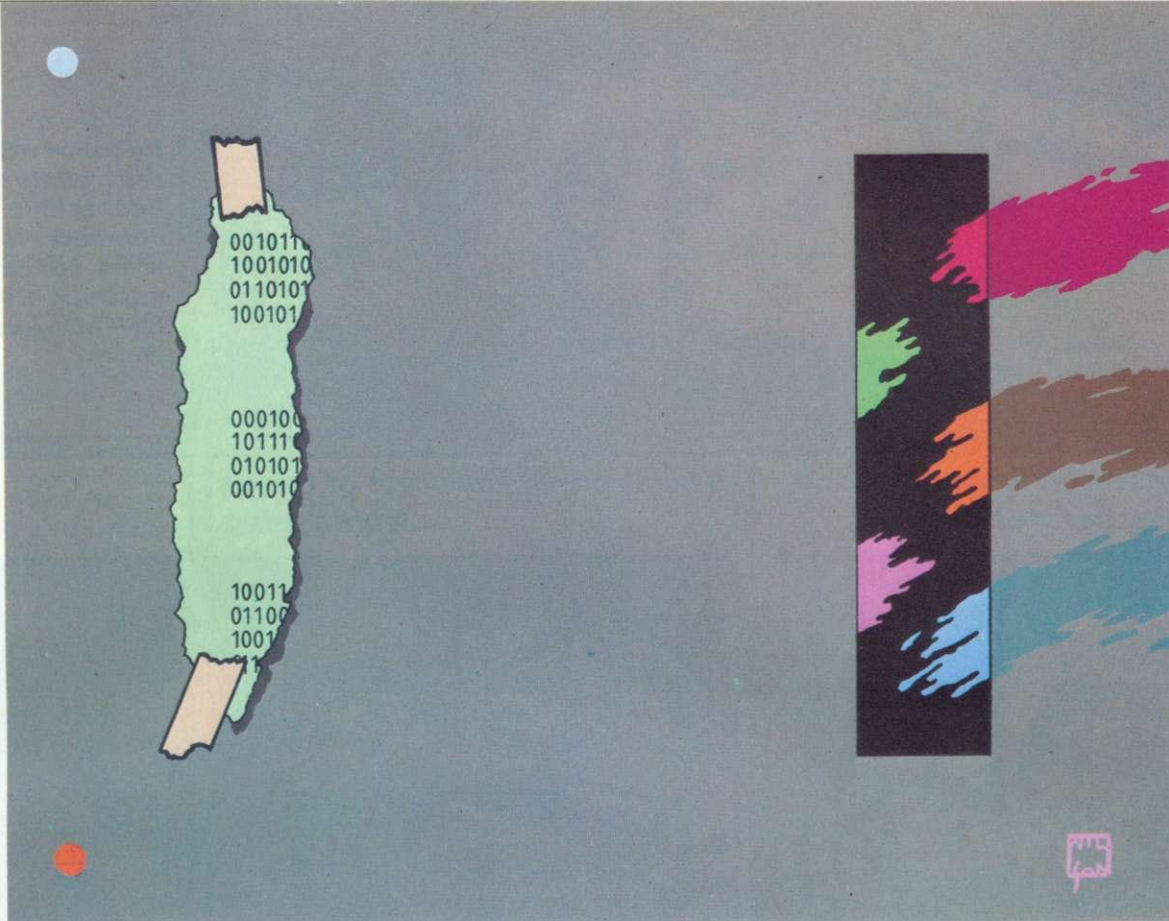

73

You'd like high-res, multi-colour graphics without losing too much memory? Tristram Mabbs shows you how

ONE OF the more popular features of the BBC micro is its ability to have an abundance of colours present on the screen at once. This is accomplished in a relatively simple way by having a display which requires a number of bits for each pixel, and the binary number contained within these bits determines the colour. This leads to screen modes with a large number of colours which require an even larger number of bits and so you get either reduced resolution or a large amount of program memory disappearing out of your reach.

Other manufacturers have managed to overcome this, so why shouldn't the BBC micro have high resolution, multi-colour graphics with plenty of memory left too? The answer is that for a sophisticated machine like the Beeb, the methods used to achieve this, additional memory or colour attributes, are generally unacceptable.

Additional memory is usually found in one of two forms. First, as screen memory RAM overlays, eg Aries B20, Raven and Watford Electronics 32k RAM boards. Another example is, of course, a second processor.

Second, memory is removed from

the processor's reach and accessed either as paged memory (like the BBC micro's ROMs) or through a few locations by giving commands to the video display hardware. The method used to program the 6845 is an example of a more complex version of this.

The second common method of obtaining large numbers of colours has fewer variations. All graphics are accessed in a similar manner to the teletext graphics found on the BBC micro's mode 7—that is, a byte precedes the graphics and defines their colour. This has the obvious disadvantage of requiring bytes to define the colour and no pixels can appear in such bytes.

There is, however, another method which is rarely used. It is implemented very successfully on the Atari range of computers and involves redefining colour registers *during* a scan of the screen as a result of an interrupt. Atari have christened this technique the Display List Interrupt (DLI). It may sound rather complex but application is relatively simple.

This method has disadvantages, but can be implemented on any BBC micro without additional hardware and as

such is very useful in commercial software, and the basic idea can be expanded in various ways, which I'll describe. The disadvantages themselves are largely a matter of inconvenience—you cannot redefine a colour cleanly while it is being displayed, and the processor interrupt overhead is slightly increased. The results, however, show that the advantages far outweigh the disadvantages.

There are two techniques to carry this out on the BBC, but only one is described in detail here. The other can only be used if no other interrupts are occurring and the screen is in mode 2; but why bother with this technique if you can afford the memory overhead for mode 2 anyway?

The first method involves trapping two of the BBC micro's housekeeping interrupts—the interrupt to indicate that the screen is being updated and all the top of screen conditions now apply, and the timer interrupt which tells the microprocessor that it needs to change a colour now.

What happens is that the timer is set at the top of the screen (and after any subsequent interrupt if several changes are required) so that at any

Building with


BEASTY

NEW

Beasty is a registered trade mark of Micro-Robotics, Cambridge, England. The Beasty System is made in England by Micro-Robotics.

Explore the exciting world of Robotics with the new infra-red remote controlled Beasty. Beasty links your home computer to model cars, robot arms, construction sets and anything else you can dream up – how about a spider that walks?

Beasty can be linked to many construction sets,

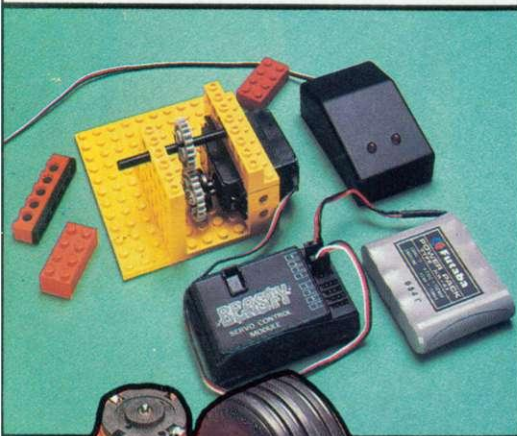

Beasty can do all sorts of things ...from typing



...to chemistry



...to driving a model car



this one does 30 MPH!



Beasty works with the BBC B, Commodore 64, Spectrum and Spectrum plus.

...to controlling TV's and video replacing the remote control handset.



Many people will be familiar with the Beasty's servos. Millions are made each year by Futaba of Japan for controlling model aeroplanes, boats and cars. The standard servo is extremely powerful and can be positioned to an accuracy of 1°.

The Beasty is a British invention which controls up to eight of these servos over an infra-red link from your computer. The low cost and unique adaptability of Beasty make it a firm favourite in schools and at home for learning about Robotics. It can also be found in many universities where it is being used with the Micro-Robotics SNAP vision system to build 'seeing' robots.

Please phone or write to us for the complete Commotion handbook.

**241 Green Street,
Enfield, Middlesex
EN3 7SJ**

**Telephone:
01-804-1378**

COMMOTION
COMPUTER OPERATED MOTION

Ordering information

8 channel Infra-red Beasty complete with transmitter receiver and battery holder, software and documentation available for the BBC, Spectrum and Commodore 64.

P-BMIRB-BBC £49.95 ☐
P-BMIRB-SPEC £49.95 ☐
P-BMIRB-C64 £49.95 ☐

4 channel Beasty inc. software, cable and documentation.
Standard Beasty servo
Beasty arm mechanism (3 servos and Beasty also required)
Beasty model base

P-BMI-BBC £29.95 ☐
P-SP128 £14.50 ☐
P-ARM1 £39.95 ☐
P-BASE1 £75.00 ☐

All prices include VAT, P and P £1.25. Export and Trade prices on application.

Name _____

Address _____

Post Code _____



point, the value in the timer indicates the position of the electron beam as it traces out the picture on the display. The timer can cause an interrupt after a given count has been reached and thus when the electron beam is at a specific point on the screen.

This article and the follow-on next month explain how to implement this technique on the BBC, first to change colours and next month expanding this to split the screen into several different modes.

Electron users, please note that due to the use of the spare system via timer in the Beeb, this software will not work on your machines... yet.

Before going any further, I'll explain the video ULA as it has to be directly accessed by the software rather than using calls such as VDU19. As a point of interest, I discovered the method of operation of the ULA by connecting the ULA chip select to the microprocessor NMI (Non Maskable Interrupt) line so that, whenever the operating system accessed the ULA, an interrupt occurred and a short routine saved the registers.


The ULA consists of two registers, a control register and a palette register located at &FE20 and &FE21 respectively, and I'll explain the control register next month. The palette register consists of 16 four-bit write-only locations. Each location is written-to by placing the data on the lower four bits of a byte where the top four bits contain the address. Thus writing a value of &0x to &FE21 will write to the first location, &1x the second and so on. The lower four bits contain the physical colour Exclusive ORed with 7.

The function of each of these locations depends on the currently selected screen mode. For mode 2, each location corresponds to the appropriate logical colour. Thus writing &00 to location &FE21 will define the background colour (colour 0) as logical colour 7 (remember the physical colour is Exclusive ORed with 7). Two-colour modes are also relatively simple. Here, eight locations must be set for each colour: locations 0 to 7 determine colour 0, and 8 to &F determine colour 1. Note that not setting each group of eight locations to the same value can cause some interesting effects.

Finally, for four colour modes, the relationship between colours and locations is more complex. Four locations must be set for each colour but these are not grouped together as for two-colour modes; colour 0 is controlled by locations &0x, &1x, &4x and &5x, colour 1 by &2x, &3x, &6x, and &7x, colour 2 by &8x, &9x, &Cx and &Dx and colour 3 by &Ax, &Bx, &Ex and &Fx.

This brings us to the program, which is in the form of a procedure that can be used in Basic, or the machine code may easily be used by itself. A short (15 line) routine is patched onto the beginning of the program to form a demonstration of the procedure and to illustrate its use.

PROCsetdlis requires one parameter in the form of the start address of a block of data in memory which contains a series of three byte entries arranged as follows. Bytes zero and one contain a value to be written into the VIA timer thus determining when the next DLI will occur. Byte two is split into two nibbles, the upper four bits selecting which colour is to be changed (colour 1 in the example, hence the OR&10 in line 50; colour 2 would be &20 and so on) and the lower four providing the colour it is to be changed to. This

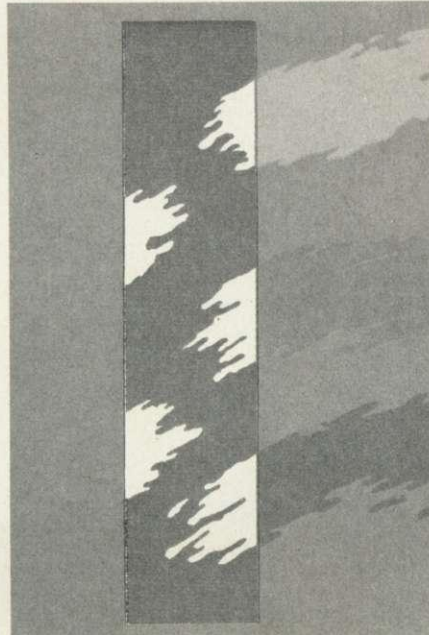

colour does not need to be Exclusive ORed with 7. This table of entries is terminated by an entry with all three bytes set to &FF. Please note that the final DLI must occur before the bottom of the screen to prevent spurious interrupts being generated. The demonstration routine simply sets the data up so that coloured bands will be produced spanning four lines in colour 1, mode 6. Note that Line_Val is only &260 for modes 6 and 3, ie those with 25 lines of text. Selecting a mode with 32 lines will cause the bands to cover approximately five lines.

The main procedure is largely self-explanatory if you are familiar with machine code and understand the information above. There is a common section from line 10000 to 10480, followed by a series of routines, one of which is selected by line 10340 depending on the current screen mode (as found at line 10010). If you wish to shorten the routine and tailor it to a specific

application, you can use only the routine appropriate to the particular mode you will be using and delete the others; the selected routine should be inserted from line 10340 to 10349.

A point to note is that the first DLI timer value has &1AB added to it by lines 10050 and 10060 to allow for the blank area at the top of the screen. This value is valid for *TV. Using *TV to shift the screen has no effect on the DLI routine as the DLIs are referenced from the frame sync, not the first line of screen data. Therefore, using *TV shifts the display relative to the DLI changes.

Finally, there are two other routines appended to the program, PROCdlisoff and PROCdlison. These allow the interrupts to be deselected and reselected from within a program if the program needs to extend the DLI data. Note that the DLI data is portable between modes with the same number of colours, though take into account the difference between 25 and 32 line modes.


There are a couple of general points to remember. First, you may notice slight flicker when running the program, caused by the DLI interrupts not having priority over the operating system. To cure this totally, a re-entrant DLI and operating system interrupt routine is required. While this is possible, it makes the software operating system dependent as calls have to be made into the OS ROM itself rather than through the vectored calls in page &FF. Advanced programmers may like to reduce the problem by disabling interrupts they are not using, thereby minimising the chance of conflict. The flicker becomes increasingly pronounced as more DLIs are added and the chance of interrupts clashing increases, so select your screen layout with care.

Next, it is best to arrange for a DLI to change a colour that is not currently being displayed, as this way the flicker caused by all the registers failing to change at once does not appear on the screen.

Finally, if you are running very short of memory, use CLEAR to remove all the variables after using PROCsetdlis, then re-dimension the two arrays—the one containing the DLI data and the one containing the machine code; the length of the latter array is given by FNassemble (0,&D000)—as they will then cover the same area of memory as the original arrays which will be preserved, but all other variables will have been deleted.

Tristram Mabbs listing and instructions on entering the program are on yellow page 101

• INTELLIGENT • ENTERTAINMENT •

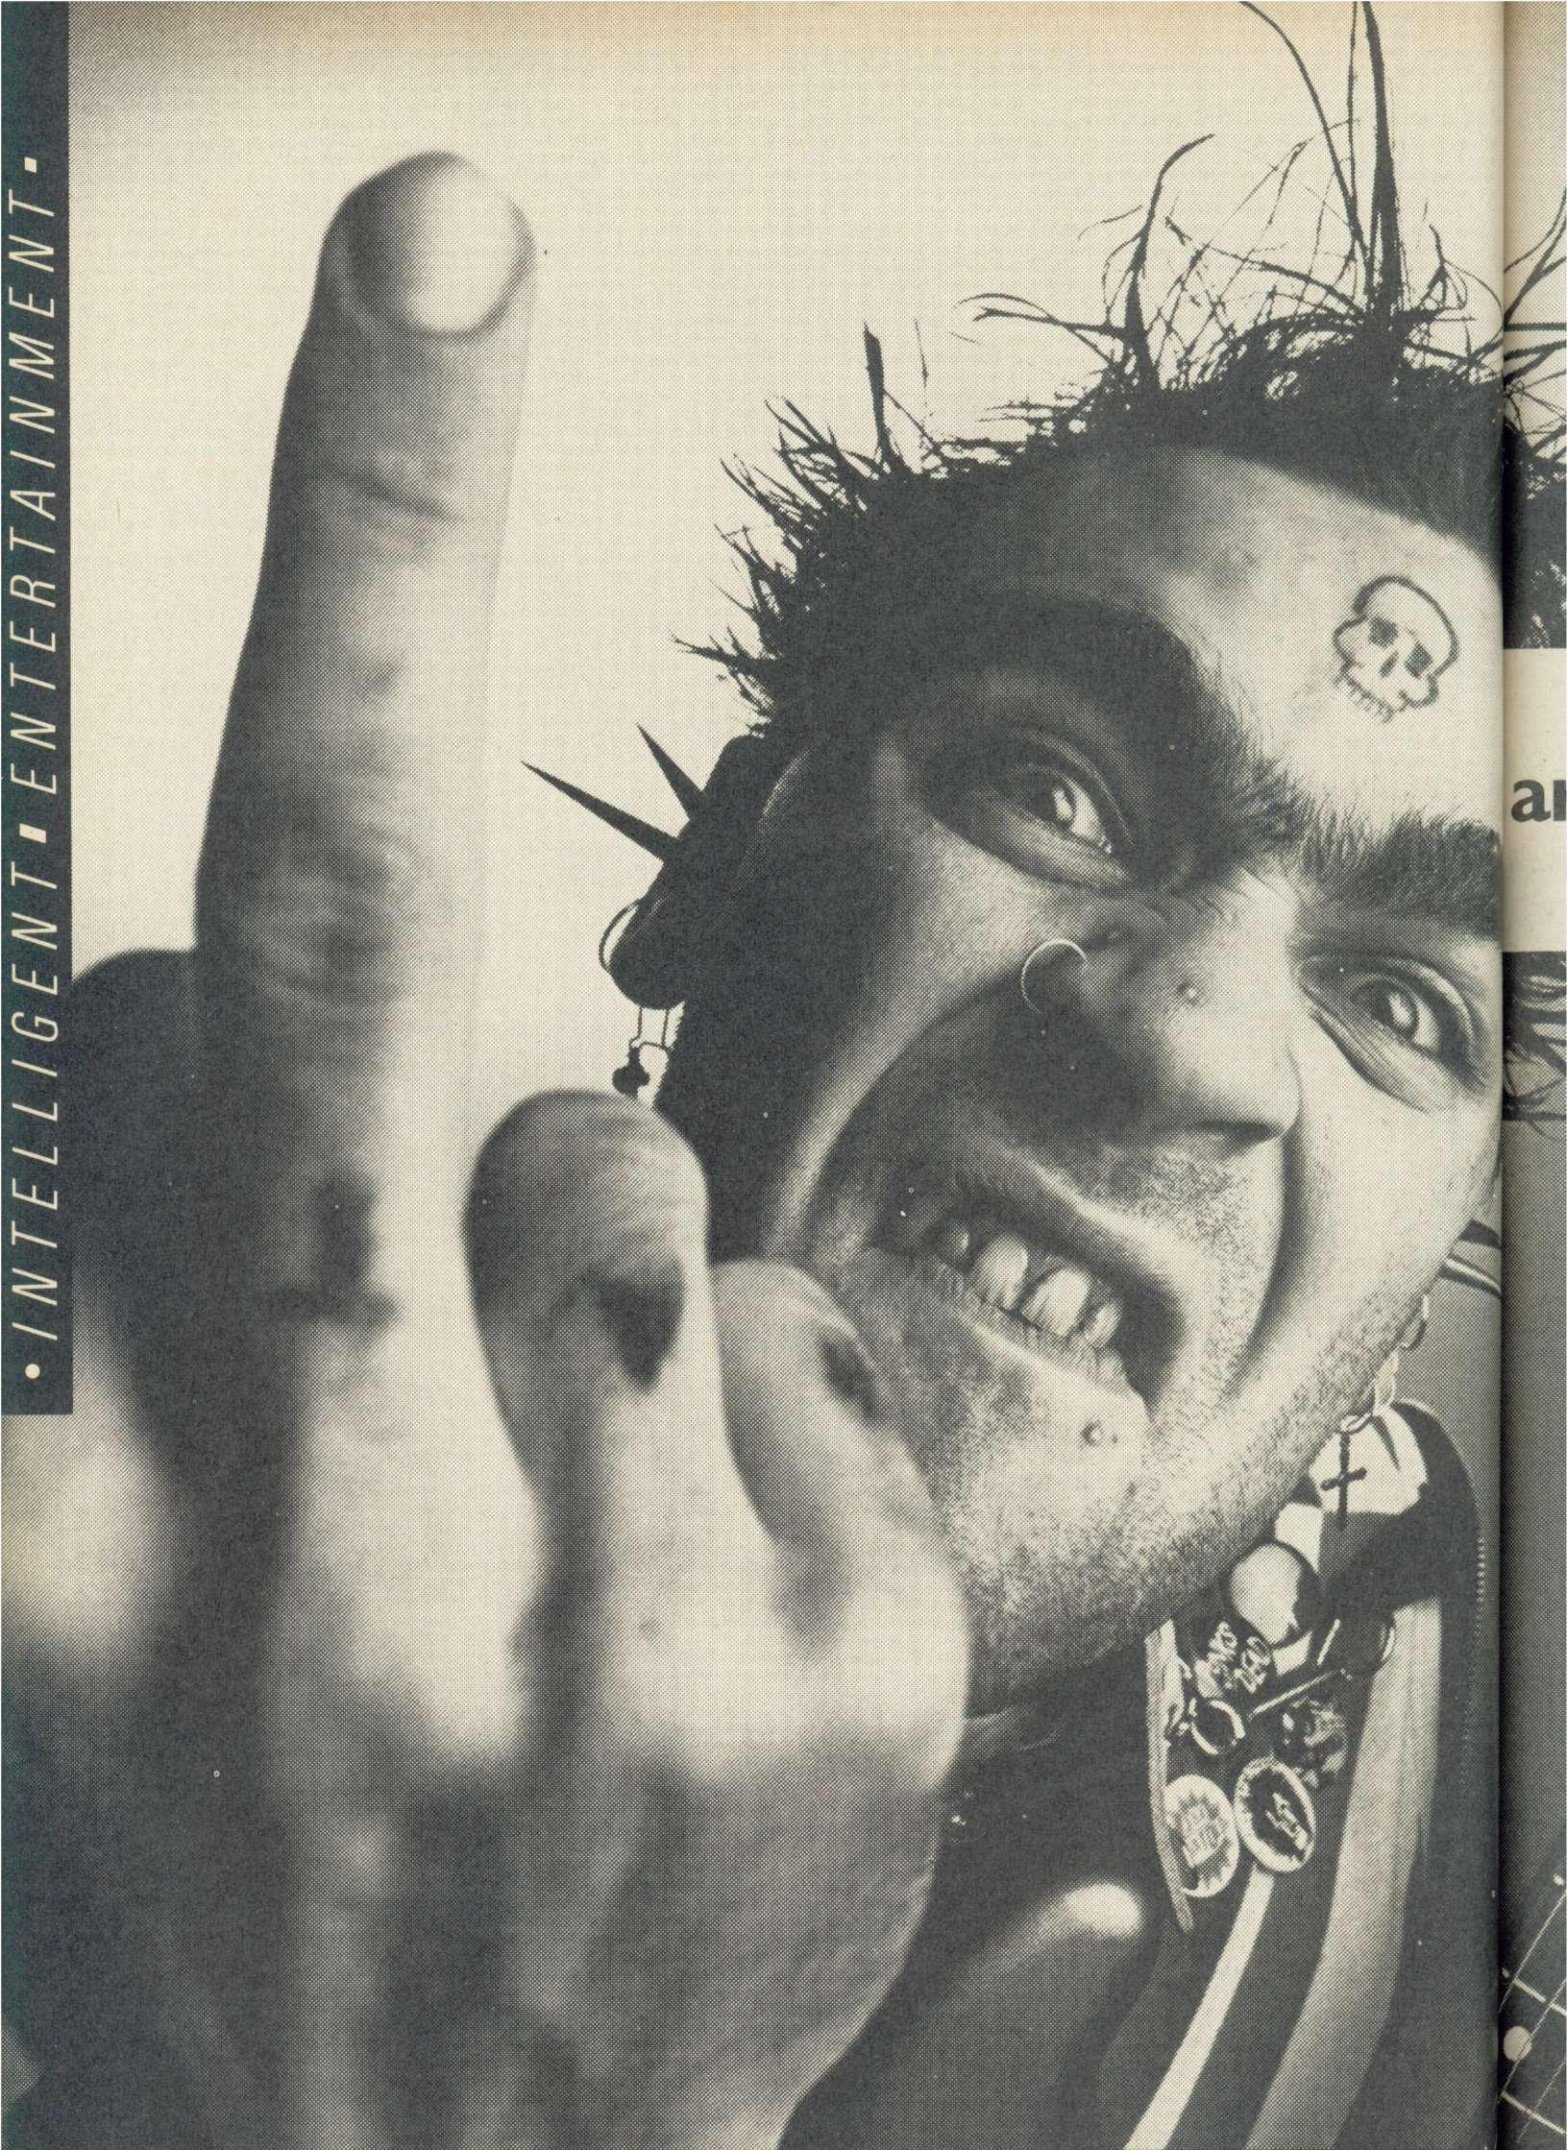

AVAILABLE ON



&



One finger and half a brain are all you need to make music on the new Music System.

You're looking at a composer. It's hard to believe, I know. But with the aid of The Music System program, he has just written a whole 'song' completely by himself.

Clever boy.

"Toxteth Dawn" is the name of the 'song'.

It's a love song.

Without any knowledge of music he bought the music system program, went home, booted it up on his dad's BBC B and started to create.

He used the synthesiser part of the program to make a few noises.

Added a pinch of an old song from the Song and Sound Library.

Laid down some percussion. And put a hint of bassoon and strings over the top.

And hey presto.

The musical answer to zits. "Toxteth Dawn."

Because his dad's computer had a printer as well, the program even printed out the composition in full musical-manuscript form.

So he could show it to the rest of the band. And they could say. 'WOSSAT?'

Isn't it time you became a composer too?

The brand new Music System from Island Logic.



DISK PACK £24.95 INC VAT. CASSETTE 1 (SYNTHESISER, KEYBOARD, SONG AND SOUND LIBRARY) £12.95 INC VAT. CASSETTE 2 (EDITOR, PRINT-OUT, SONG AND SOUND LIBRARY) £12.95 INC VAT. PLEASE ADD £1.25 P & P PER ORDER AND SEND A CHEQUE/PO, ACCESS OR VISA CARD NO. WITH ORDER TO: SYSTEM, 12 COLLEGIATE CRES., SHEFFIELD S10 2BA. (CREDIT CARD HOTLINE 0742 682321).

THIS PROGRAM IS RECORDED ON THE HIGHEST POSSIBLE QUALITY DISKS, AS SUPPLIED BY MEMOREX

COUPON OFFER



BBC CASSETTES

Aviator
Maze
Snooker
Tetrapod
Volcano
Black Box/Gambit
Bouncer
Seventh Star
Firebug
Quondain
Labyrinth
Go
Philosopher's Quest
Monsters
Snapper
Rocket Raid
Arcade Action
Sphinx Adventure
Cube Master
JCB Digger
Chess
Sliding Block Puzzles
Meteors
Arcadians
Planetoids
Super Invaders
Castle of Riddles
Missile Base

SAVE UP TO £160 ON THESE AU OFFERS!

IN THIS MONTH'S discount scheme exclusive to *Acorn User* readers, you can save as much as £160 on Acornsoft products ranging from the P-System languages to run on the 6502 second processor, to games cassettes for the BBC micro and Electron.

Just cut out any of the coupons opposite and send them to Vector Marketing with the form below—carefully filled in, of course—and your remittance.

Indicate which items you wish to purchase by entering the discounted price of each article or set of articles in the right-hand column of the box. At the foot of the column please show the total amount you are paying. When making your choice of software you will need in some cases to specify the title(s) that you want.

Only one coupon per item may be used. Closing date for receipt by Vector Marketing (London Road, Wellingborough, Northants NN8 2RL) of coupon(s), completed form and remittance is May 31, 1985.

ELECTRON CASSETTES

Philosopher's Quest
Monsters
Snapper
Sphinx Adventure
Maze
Meteors
Planetoids
Draughts/Reversi
Snooker
Starship Command
Hopper
Crazy Tracer
Free Fall
Boxer
Firebug
Go

ASK TITLES

Facemaker
Hide & Seek
Let's Count
Number Gulper
Number Puzzler
Number Chaser
Children from Space
Cranky
Table Adventures
Words Words Words
Podd
Juggle Puzzle
Squeeze

PLEASE SEND ME (POST AND PACKAGE FREE) THE ITEMS INDICATED ON THIS FORM

NAME _____

ADDRESS _____

POST CODE _____

☐ I ENCLOSE A CHEQUE/PO PAYABLE TO VECTOR MARKETING FOR £ _____

☐ PLEASE DEBIT MY ACCESS/BARCLAYCARD

ACCOUNT NUMBER

CREDIT CARD EXPIRY DATE

SIGNED _____ DATE _____

CODE	PRODUCT	NORMAL PRICE (incl. VAT)	DISCOUNT	OFFER PRICE (incl. VAT)	PAYMENT enclosed
SNB 26	Acornsoft P-System (BBC)*	£299	£25	£274	
SCB 03	Acornsoft View ROM cartridge (Electron)**	£49.80	£20	£29.80	
SCB 07	Acornsoft ViewSheet ROM cartridge (Electron)**	£49.80	£20	£29.80	
RAU 1	Five Acornsoft ASK titles (BBC/Electron) as specified here: 1.....3..... 2.....4.....5.....	£49.75	£25	£24.75	
RAU 2	Seven Acornsoft Mirle titles (BBC)† (see also page 131 of this issue)	£174.65	£60	£109.65	
RAU 3	One Acornsoft Electron cassette (excluding Elite) as specified here:.....	£9.20	£2	£7.20	
RAU 3	One Acornsoft Electron cassette (excluding Elite) as specified here:.....	£9.20	£2	£7.20	
SBD 25	Acornsoft Electron Advanced User Guide	£9.95	£2	£7.95	
RAU 4	One Acorn Electron games ROM cartridge** as specified here:.....	£14.95	£3	£11.95	
RAU 5	One Acornsoft BBC cassette (excluding Elite) as specified here:.....	£9.95	£2	£7.95	
	*Requires a second processor **Requires a Plus-1 140-track disc only				
	TOTAL REMITTANCE				£

Send this form with your remittance to: Acorn User Offer (2), Vector Marketing, London Road, Wellingborough, Northants NN8 2LR. Offer closes May 31, 1985.

ACORN USER SOFTWARE DISCOUNT SCHEME

VALID UNTIL MAY 31, 1985

RAU 2

£60**E60 COUPON
TOWARDS THE
PURCHASE OF
ALL SEVEN
ACORN SOFT
MIRLE TITLES
(BBC 40 track
disc only)**

OFF

RAU 2

ACORN USER SOFTWARE DISCOUNT SCHEME

VALID UNTIL MAY 31, 1985

RAU 1

£25**£25 COUPON
TOWARDS THE
PURCHASE OF
ANY FIVE
ACORN SOFT
ASK TITLES
(BBC or
Electron)**

OFF

RAU 1

ACORN USER SOFTWARE DISCOUNT SCHEME

VALID UNTIL MAY 31, 1985

SCB 07

£20**£20 COUPON
TOWARDS THE
PURCHASE OF
ACORN SOFT
VIEWSHEET
ROM CARTRIDGE
(Electron -
requires a Plus 1)**

OFF

SCB 07

ACORN USER SOFTWARE DISCOUNT SCHEME

VALID UNTIL MAY 31, 1985

RAU 3

£22**£22 COUPON
TOWARDS THE
PURCHASE OF
ANY ACORN SOFT
ELECTRON
CASSETTE
(except Elite)**

OFF

RAU 3

ACORN USER SOFTWARE DISCOUNT SCHEME

VALID UNTIL MAY 31, 1985

RAU 5

£22**£22 COUPON
TOWARDS THE
PURCHASE OF
ANY
ACORN SOFT
BBC CASSETTE
(except Elite)**

OFF

RAU 5

ACORN USER SOFTWARE DISCOUNT SCHEME

VALID UNTIL MAY 31, 1985

SNB 26

£25**£25 COUPON
TOWARDS THE
PURCHASE OF
ACORN SOFT
P-SYSTEM
(requires a
second
processor)**

OFF

SNB 26

ACORN USER SOFTWARE DISCOUNT SCHEME

VALID UNTIL MAY 31, 1985

SCB 03

£20**£20 COUPON
TOWARDS THE
PURCHASE OF
ACORN SOFT
VIEW ROM
CARTRIDGE
(Electron
requires a Plus 1)**

OFF

SCB 03

ACORN USER SOFTWARE DISCOUNT SCHEME

VALID UNTIL MAY 31, 1985

RAU

£3**£3 COUPON
TOWARDS THE
PURCHASE OF
ANY ACORN SOFT
ELECTRON
GAMES ROM
CARTRIDGE
(requires a Plus 1)**

OFF

RAU 4

ACORN USER SOFTWARE DISCOUNT SCHEME

VALID UNTIL MAY 31, 1985

RAU 3

£22**£22 COUPON
TOWARDS THE
PURCHASE OF
ANY ACORN SOFT
ELECTRON
CASSETTE
(except Elite)**

OFF

RAU 3

ACORN USER SOFTWARE DISCOUNT SCHEME

VALID UNTIL MAY 31, 1985

SBD 25

£22**£22 COUPON
TOWARDS THE
PURCHASE OF
ACORN SOFT'S
ELECTRON
ADVANCED
USER GUIDE**

OFF

SBD 25

VALID UNTIL MAY 31, 1985

SNB 26

TO THE READER:

This coupon entitles you to a saving of £25 on the tax-inclusive price of an Acornsoft P-System. Only one coupon may be used towards the purchase of each P-System. This coupon cannot be used to gain a saving on any other item.

Acornsoft Ltd reserves the right to refuse defaced or damaged coupons or those that have not been validly redeemed.

(This product requires a second processor)

SNB 26

—OFF—

VALID UNTIL MAY 31, 1985

RAU

TO THE READER:

This coupon entitles you to a saving of £60 on the tax-inclusive price of all seven Acornsoft Mirle titles. Only one coupon may be used towards the purchase of all seven Mirle titles. This coupon cannot be used to gain a saving on any other item.

Acornsoft Ltd reserves the right to refuse defaced or damaged coupons or those that have not been validly redeemed.

(This product is available only on 40 track disc)

RAU 2

—OFF—

VALID UNTIL MAY 31, 1985

SCB 03

TO THE READER:

This coupon entitles you to a saving of £20 on the tax-inclusive price of an Acornsoft View ROM cartridge. Only one coupon may be used towards the purchase of each View ROM cartridge. This coupon cannot be used to gain a saving on any other item.

Acornsoft Ltd reserves the right to refuse defaced or damaged coupons or those that have not been validly redeemed.

(This product requires a Plus 1)

SCB 03

—OFF—

VALID UNTIL MAY 31, 1985

RAU

TO THE READER:

This coupon entitles you to a saving of £25 on the tax-inclusive price of any five Acornsoft ASK titles. Only one coupon may be used towards the purchase of any five ASK titles. This coupon cannot be used to gain a saving on any other item.

Acornsoft Ltd reserves the right to refuse defaced or damaged coupons or those that have not been validly redeemed.

(These products are for the BBC or Electron)

RAU 1

—OFF—

VALID UNTIL MAY 31, 1985

RAU 4

TO THE READER:

This coupon entitles you to a saving of £3 on the tax-inclusive price of any Acornsoft Electron games ROM cartridge. Only one coupon may be used towards the purchase of any Electron ROM cartridge.

This coupon cannot be used to gain a saving on any other item.

Acornsoft Ltd reserves the right to refuse defaced or damaged coupons or those that have not been validly redeemed.

(These products require a Plus 1)

RAU 4

—OFF—

VALID UNTIL MAY 31, 1985

SCB 07

TO THE READER:

This coupon entitles you to a saving of £20 on the tax-inclusive price of an Acornsoft ViewSheet ROM cartridge. Only one coupon may be used towards the purchase of each ViewSheet ROM cartridge.

This coupon cannot be used to gain a saving on any other item.

Acornsoft Ltd reserves the right to refuse defaced or damaged coupons or those that have not been validly redeemed.

(This product requires a Plus 1)

SCB 07

—OFF—

VALID UNTIL MAY 31, 1985

RAU 3

TO THE READER:

This coupon entitles you to a saving of £2 on the tax-inclusive price of any Acornsoft Electron cassette (except Elite). Only one coupon may be used towards the purchase of any Electron cassette.

This coupon cannot be used to gain a saving on any other item.

Acornsoft Ltd reserves the right to refuse defaced or damaged coupons or those that have not been validly redeemed.

IAU 3

—OFF—

VALID UNTIL MAY 31, 1985

RAU

TO THE READER:

This coupon entitles you to a saving of £2 on the tax-inclusive price of any Acornsoft Electron cassette (except Elite). Only one coupon may be used towards the purchase of any Electron cassette.

This coupon cannot be used to gain a saving on any other item.

Acornsoft Ltd reserves the right to refuse defaced or damaged coupons or those that have not been validly redeemed.

RAU 3

—OFF—

VALID UNTIL MAY 31, 1985

SBD 25

TO THE READER:

This coupon entitles you to a saving of £2 on the tax-inclusive price of any Acornsoft Electron Advanced User Guide. Only one coupon may be used towards the purchase of an Electron Advanced User Guide. This coupon cannot be used to gain a saving on any other item.

Acornsoft Ltd reserves the right to refuse defaced or damaged coupons or those that have not been validly redeemed.

SBD 25

—OFF—

VALID UNTIL MAY 31, 1985

RAU 5

TO THE READER:

This coupon entitles you to a saving of £2 on the tax-inclusive price of any Acornsoft BBC cassette (except Elite). Only one coupon may be used towards the purchase of any BBC cassette. This coupon cannot be used to gain a saving on any other item.

Acornsoft Ltd reserves the right to refuse defaced or damaged coupons or those that have not been validly redeemed.

RAU 5

—OFF—

Get the full story

DOT MATRIX PRINTER SC-1000

 COPAL

GUARANTEE:
If any machine is found to be defective (other than through normal wear and tear) within six months of purchase, we will replace it free of charge within 48 hours.

£218



100 CPS • Centronics and Serial Interface • Tractor and Friction Feed.

DOT MATRIX PRINTER SC-1200

 COPAL

GUARANTEE:
If any machine is found to be defective (other than through normal wear and tear) within six months of purchase, we will replace it free of charge within 48 hours.

£248

NLQ
£285



120 CPS • Near Letter Quality option available • Centronics Parallel Serial Interface (option).

TYPE & TALK SPEECH COMPUTER

DEALER & OEM
ENQUIRIES
WELCOME

£171



Instant conversion of typed ASCII text into speech • Unlimited vocabulary • Centronics and Serial RS232 or 423 Interfaces.

NAMAL DISK DRIVES

USING
TEAC
FD55
SERIES

- 1 Single Disk Drive
- 2 Single Disk Drive with PSU
- 3 Dual Disk Drives (vertical)
- 4 Dual Disk Drives (horizontal)

from
£120



TEAC 5 $\frac{1}{4}$ " Drive • Choice of capacity from 125 KBytes to 1 MByte • High-speed data access.

from CMC

The new range of peripherals from CMC represents outstanding quality at the best prices around. Full details and colour leaflets on each product are available on request—call us on Cambridge 355404.



ALL PRICES INCLUDE VAT

Cambridge Microcomputer Centre

153-54 East Road, Cambridge CB1 1DD
Telephone (0223) 355404 Telex 817445

WATCH YOUR SCREEN FOR A GOOD PLOT

82

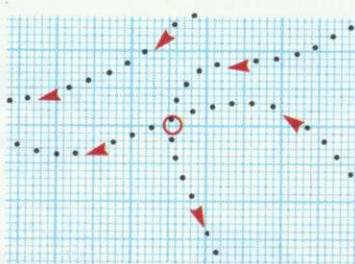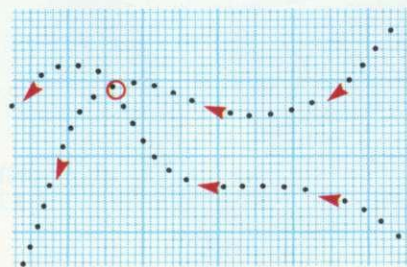

Nigel Jennings' *Graph* program allows you to plot equations on screen

A PROGRAM to plot equations so you can check your maths homework and impress your teacher—and any particularly artistic results can be dumped. The basic idea behind *Graph* is to represent a sheet of graph paper on the screen. The program will accurately plot any sensible mathematical function in the cartesian plane. By convention, Y is evaluated on the vertical axis as a function of X along the horizontal.

The program provides various functions and controls over output format. Considerable precision is achieved in mode 0, although this requires 32k, and the use of a monitor is recommended for readability. However, a mode 7 Help screen can be accessed at any time.

I have defined the plotting area so that, in the default mode, both axes are drawn from -10 to +10 (20 units in length). The BBC micro's graphics screen of 1280 × 1024 pixels can be conveniently 'rounded' to 1200 × 1000, providing essential margins at the screen boundaries. A one-line text window is required at the bottom of the screen for display of input and format code. Mode 0 accommodates 32 lines of text, which means that mode 0 text is 1024 divided by 32 pixels high, ie 32 pixels, leaving a maximum available Y-axis length, including the two borders, of 968 pixels (1000 - 32).

To ensure plotting accuracy, it is desirable to maintain an X:Y scaling

that can be represented exactly by the computer. This is readily achieved with the X-axis, where $1200/20 = 60$. Reducing the Y-axis length slightly gives $960 - 20 = 48$, so we have a plotting ratio of 60:48, or an intrinsic scaling $Y = 0.8X$ —this is a measure of how much the Y-axis is 'compressed' compared with the X-axis. By coincidence we now have exactly 32 pixels spare in the Y-direction ($1024 - 960 - 32$), and so can have equal margins of 16 at top and bottom. The X-axis margins work out conveniently at 40 on each side.

As the axis origin will be variable it is sensible to relocate the graphics origin with a VDU 29 call; the default X-coordinate is given by $40 + 1200/2 = 640$ and the Y-coordinate by $(32 + 16) + 960/2 = 528$.

Figure 1 (not to scale) illustrates the above arrangement.

Addressing the screen

To enable the axis origin to be changed during execution of the program, the screen is addressed by reference to the current graphics origin co-ordinates, relative to the margins. The significant points of each axis have the relative co-ordinates shown in figure 2.

It can be seen that when the axis origin (XA%,YA%) has the default co-ordinates of 640,528, the X-axis is plotted from screen positions -600 to +600; the Y-axis is plotted from -480 to +480.

The scale factor can also be changed during program execution, but plotting calculations must take account of both the 60:48 scaling and the current scale factor (SF).

For evaluation of the function to be plotted, all values must be scaled up to 'real-life' magnitude. X-values are incremented by the program statement:

```
FOR X = (40 - XA%) / 60 / SF TO
(1240 - XA%) / 60 / SF STEP 0.1 / SF
```

Irrespective of the axis origin of the scale factor, this expression always produces 200 X-values (actually, certain scale factors produce one extra X-value). At the default scale factor of 1, the values range from -10 to +10. If the scale factor is increased to 2 then the X-values range from -5 to +5. X-values are plotted at a density of six pixels per point ($1200/200$).

When the function has been evaluated for each X-value to produce a corresponding Y-value, it is necessary to scale down again to the magnitude required to plot each X-Y co-ordinate on the graphics screen. This is achieved by multiplying the X-value by $60 \times SF$ and the Y-value by $48 \times SF$.

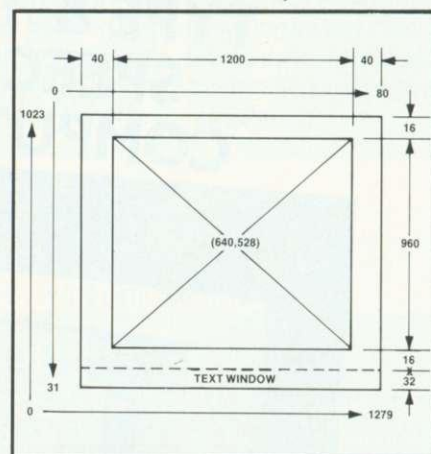


Figure 1. How the 'Graph' plotting area is defined, with margins all round and a one-line text window to display input and format codes

A similar process is used to calculate and print the scale points along each axis. Here the expression for the X-axis is incremented in steps of 120 and the Y-axis in steps of 96 to produce graduations and scale points at 20 intervals on each axis. Again, the scale points are calculated with reference to the scale factor and the 60:48 scaling. Whatever the scale factor, though, exactly 20 intervals are always graduated on each axis; only the values assigned to each graduation change according to the scale factor and axis origin.

This symmetry has one drawback, overcome by the procedure that

prompts for and executes new axis origin co-ordinates. PROC_ORIGIN contains a pair of functions that round up each new co-ordinate input to the nearest value that will produce scale points of even magnitude about the axis origin. Otherwise the untidy situation can arise where arbitrary X and Y co-ordinates will not intersect exactly at zero, because the graduations are 'fixed' on each axis. The alternative but more involved approach is to calculate variable graduations.

It is confusing but purely coincidental, by the way, that the margin relative to which the Y-axis is addressed and its intrinsic scaling are both 48.

Control codes

Output format and program functions are controlled by a series of codes that can be entered whenever the computer prompts for input. There are two types of code: print control codes select presentational features, operating with on/off logic. The currently selected print control codes are displayed on program initialisation whenever a code is changed or when the user requests. Program control codes determine changes to the normal execution of the program and have immediate effect. The effect of each code is shown in the box on page 85.

The program needs to distinguish control codes from potential functions for plotting. It achieves this by placing all the code mnemonics (except the Help and Repeat codes, which need separate attention) in an array, Code\$. All input is tested against this array and, if a correspondence is found, the control code is executed appropriately. The status (true or false) of the print control codes is recorded by another array, Code%. The structures of Code\$, and Code% at default, are shown in figure 3.

Error handling

The scope of the program is greatly increased by specifically handling four errors that a wide class of functions will create. These manifest themselves as the computer errors 'Division by Zero', 'Too Big', 'Negative Root' and 'Log Range'. Examples are, respectively, $1/X$, $1/X$ with $SF=5$, $SQR(X)$, and $X \uparrow 1.5$. Such errors arise in PROC_PLOT, while attempting to evaluate and plot the expression, for some particular value or interval of X.

All error-handling is contained in PROC_ERROR, which suitably increases the current X-value and then re-calls PROC_PLOT with new parameters. Certain complicated functions may cause this process to be repeated several times in succession before interrupted plotting resumes. Other

'treatments' are possible and worth considering if the user has problems with some exotic function he wishes to plot. PROC_ERROR also traps Escape and syntax errors in input.

Remaining errors will have one of two effects: the computer may 'recognise' that it is unable to plot the function, and return direct to the input prompt, or it may fail to plot the function correctly and produce garbage (often in the form of closely packed vertical lines)—a change of scale factor or origin may help here.

GOTO has been completely eliminated by the statement

ON ERROR PROC_ERROR

After error-handling, execution continues from the statement immediately following the ON ERROR statement, which here is the main program Repeat loop.

One remaining problem arises when plotting with a solid plot line functions containing Tan X. Tan is evaluated as an internal function which contrives to 'ignore' those values for which it is not defined (recall $\tan X = \sin X / \cos X$). As a consequence, the 'jumps' are traced out by the plot line. If you are desper-

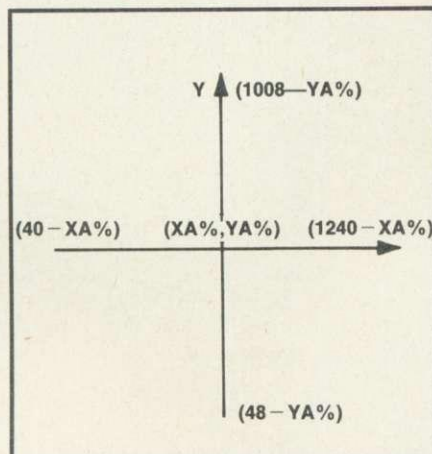


Figure 2. Relative co-ordinates for the significant points of each axis

ate, the following unwieldy statement will cure the problem:

```
8050 IF NOT Code%(6) AND
      INSTR(A$, "TAN") AND
      ABS(Y) > 5/SF AND
      SGN(Y) < > SGN(Yvalues
      (I%=1)) PLOT
      4,X*60*SF,48-YA%
```

An example of 'other treatments'!

Program structure

A few other points are worth looking at with regard to the program listing. The string variables A\$, which holds the current input, and B\$, which holds a copy of the last function plotted, are each assigned with an over-generous 78 blank spaces at lines 700:800. As

many readers will know, considerable memory space can be saved by first assigning strings to their maximum likely length (if the actual length is going to vary).

INKEY\$ timers are used to provide maximum display periods for the Help screen and print control codes display of approximately eight and five seconds respectively. A quick tap of any key will resume program execution immediately. The delay duration is easily changed—the argument to INKEY\$ is centiseconds.

The program resolves to a short loop calling the principal procedures. This structure facilitates error handling, as we have seen, and allows mode changes in conjunction with PROC_HELP (mode cannot be changed from within a procedure). Following convention, the axes are drawn before the graph is plotted, but for clarity the scales are drawn afterwards.

ENDPROC is frequently used to force a premature exit from procedures. Whether this is good programming practice is perhaps debatable, but it gives a minor speed advantage and simplifies program structure. On that note, ELSE is used infrequently because BBC Basic does not possess a structured IF... THEN... ELSE... ENDIF construct and one-line IF... ELSE statements can become tiresomely long: two exclusive IF statements are probably executed just as quickly.

In PROC_INITIALISE, VDU 29 relocates the graphics origin and VDU 28 defines the text window: for a one-line window the bottom-Y and top-Y parameters are identical. A graphics window is not defined; the only place that graphics plot outside the defined area is in the text window, where they are 'wiped out' by scrolling (for which reason the function string must be reprinted after input).


PROC_PLOT is responsible for the principal function—plotting the graph. If a solid plot line is selected it is important to position the graphics cursor at the exact starting point of the graph, otherwise a spurious straight line will trace the cursor's path from the last point plotted (usually the top of the Y-axis). The function to be plotted is evaluated for each X-value by the powerful EVAL(A\$) statement. A 201-element array, Yvalues, holds the value of the plotted function for each X-value, and is used for the Superposition function.

PROC_SCALE calculates the positioning of the scale points that are printed at the graphics cursor using VDU 5. The scales are formatted using @%=&02010A, where 02 is fixed format, 01 is one decimal place and 0A is field width of 10. VDU 4 and @%=

At last . . .

the AFFORDABLE robot

ZERO 2

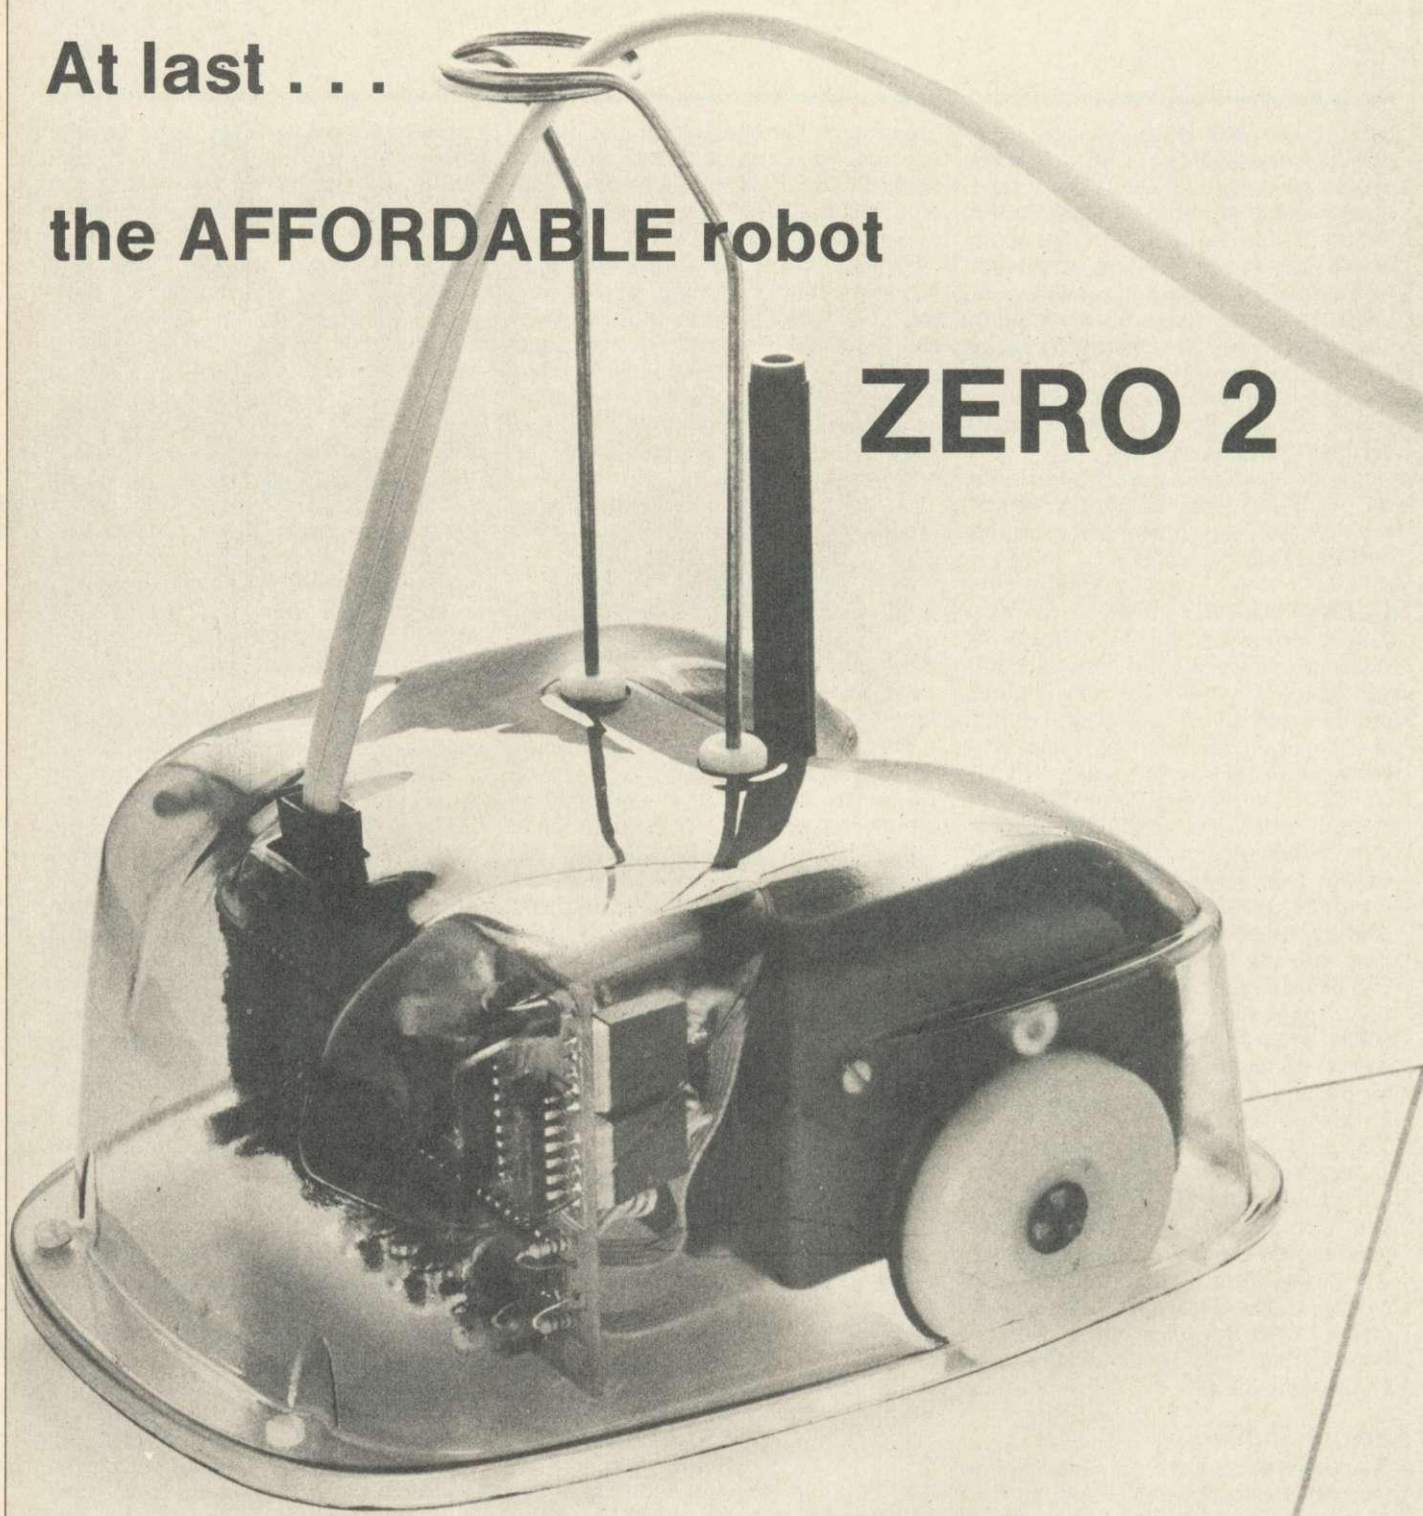

To: INTERGALACTIC ROBOTS LTD
Unit 208, 22 Highbury Grove
London N5 2EE

Please send me more information and an
order form for ZERO 2.

Name

Address

.....

.....

Postcode

AU1

ZERO 2 – THE FIRST TRUE ROBOT FOR UNDER £100

Zero 2 is a small robotic device equipped with wheels, pen, lights, line follower and two tone horn, which is controlled by electronic signals through a cable from the computer. It connects easily to the BBC microcomputer via a special adaptor cable. It is capable of precision movement in forward, backward or turning motions to accuracies of 1.0mm or one degree. Included in the software is an interface to Logotron LOGO, and many utility programs.

In the next few months Zero 2 will have many more abilities. An on-board expansion connector allows up to two other printed circuit boards to be plugged in: a bump sensor, hole sensing and speech synthesis, for example. A two way infra-red link will soon be available that will do away with the need for an umbilical connection to the microcomputer.

&OA cancel these settings at the procedure end.

As the procedure visits every scale point on the axes it is more efficient at drawing the graduations than PROC_AXES. Because the scale points are symmetrically placed against each graduation, the end points overhang the axes by half a character. Hence the need for the margins around the plotting area, the Y-axis fortuitously having a margin of exactly half the height of a mode 0 character.

PROC_ORIGIN, which handles new axis origin co-ordinates, arbitrarily restricts the range of those co-ordinates as a minor input validation measure. If you wish to plot outside that range the condition can be removed. With prac-

1	2	3	4	5	6	7	8	9	10	11
Code\$ (11)										
"AO"	"SF"	"AX"	"AS"	"PL"	"OP"	"SP"	"SD"	"RS"	"C"	"E"
Code% (8)										
--	--	--	--	-1	-1	-1	0	0	0	

Figure 3. The structure of the arrays Code\$ and Code% (at default)

tice, one or both axes can be retained on-screen for scale reference; using Overprint (OP), plot Y=0 to print the required axis scale correctly aligned while the other is positioned off-screen, then relocate the other axis and plot the desired function.

Full provision has been made in the program for a screen dump to printer

routine which can be called using the code mnemonic SD. All the user need do is write the dump procedure or interface into PROC_DUMP.

Other developments to consider are separate scale factors for the X- and Y-axes, and graph labelling (perhaps using a drag routine with the cursor control keys).

CONTROL CODES

PRINT CONTROL CODES

AO: Axis Origin

Inputting 'AO' prompts for new co-ordinates of the axis origin. The co-ordinates are adjusted to the nearest points convenient for plotting purposes. The default co-ordinates are 640,528. The program will accept X from 0 to 1279 and Y from 0 to 1023.

SF: Scale Factor

SF prompts for a new scale factor. The default is 1 when both axes are plotted from -10 to +10. For convenience, SF is really an inverse factor and SF=2 plots from -5 to +5 while SF=0.5 plots from -20 to +20.

AX: Axes

AX switches the axes 'off' and plots further graphs on a blank screen until 'AX' is input again.

AS: Axis Scales

AS stops printing of the axis scale points, while graduations continue to be drawn, until AS is input again. Note that AX also switches off the scales. AS is quite useful when the graph overlays the scale points.

PL: Solid/Dotted Plot Line

PL interchanges between a dotted and solid plot line—the default dotted line is usually more aesthetically pleasing, smoothing out rough edges, but it is particularly useful to employ the solid line when comparing different graphs after OP (see below). Note that for functions that are not 'well-behaved' a solid plot line may give a misleading impression of continuity in the graph which does not really exist, whereas a dotted line hides the discontinuities.

OP: Overprint

Selecting OP retains the previous graph(s) on screen during all subsequent plots. Deselecting OP ensures the screen is cleared before each new plot. OP in conjunction with a change of axis origin or

scale factor is not prohibited, but beware—the results may be unpredictable.

SP: Superposition

Superposition effectively means adding two or more equations and plotting the sum. It is particularly useful in Fourier analysis where output can be modelled as the sum of various functions. SP will produce the summation of the last graph and the next function input. Again, SP is not an illegal combination after other format changes. Remember to switch SP off after use.

SD: Screen Dump (optional)

SD calls a screen dump to printer routine of the user's choice.

PROGRAM CONTROL CODES

RP: Repeat last plot

RP repeats the last function plotted—very useful if the scale factor or axis origin needs to be adjusted after first plotting a function. Note that unintentional use of RP and SP will cause unexpected (but sometimes elegant!) results.

RS: Reset

RS resets all print control codes to their default values. RP is still effective after using this code.

H: Help

Displays the control code descriptions in mode 7 without disturbing the selected codes. The display will clear automatically after eight seconds, or immediately any key is pressed.

C: Codes

Displays the currently selected print control codes at the text window; the display will clear after five seconds or on pressing any key.

F: End

Ends the program in a logical manner after normalising VDU parameters.

Testing the program

When the input prompt 'Y=' appears in the text window, you can enter either a mathematical function, which will be plotted, or a control code, which will be actioned. Unless you are familiar with the function, it is best to start plotting with the default origin and scale factor. An area of interest in the graph can then be examined more closely by increasing the scale factors and possibly moving the origin. Use RP to repeat the last function plotted. Compare different graphs using OP and PL.

Expressions such as $Y = X$, $Y = X \uparrow 2$, $Y = X \uparrow 3$, and combinations such as $Y = X \uparrow 3 + 4 * X \uparrow 2 - 3$ (with SF=2) will produce classic polynomial graphs. For example, $Y = 5$ will plot a horizontal line.

To see how Superposition (SP) works, test the equivalence of say $Y = X + \cos(X)$ and $Y = X$ followed by SP then $Y = \cos(X)$; or $Y = 4 * \cos(X)$ and $Y = \cos(X)$ followed by SP then RP, RP, RP.

The following expressions are pretty severe and will test error-handling:

$$\frac{1}{(X+1)} + 1 \quad \frac{(X+2)}{(X-1)*(X-3)}$$

Bear in mind operator precedence when entering them: $1/(X+1) + 1$ and $(X+2)/((X-1)*(X-3))$ are correct forms.

Try expressions involving the built-in functions ABS, INT, DIV, MOD, LOG, EXP, SQR and the trig functions.

You may find it useful to program the user-defined keys to have '+', '*', '(', ')', available without having to press Shift, functions such as 'COS' and 'SIN', or even selected control codes.

Nigel Jennings' Graph listing to allow you to plot equations on the screen by inputting the co-ordinates is on yellow pages 102-103.

MOVE • OVER FOR • BUDGE

Brian Lienard's graphics editor brings DIY icons to your micro

86

DO YOU use the user-definable graphics feature on your BBC micro or Electron? Have you ever wished there was an easier way of defining graphics characters than the laborious and error-prone method of counting powers of two for each cell, as described in the *User Guide*? Would you like to be able to see more clearly what your characters will look like? Do you need to define multiple blocks of characters to make bigger shapes? If the answer is yes to more than two of these questions then this program is for you.

There are lots of character graphics editors around, so what's so special about this one? *Budge* (BBC User-Defined Graphics Editor) lets you design and edit graphics characters on a larger-than-life grid five character 'tiles' wide by three high. You can move a cursor around this grid using the cursor control keys, to 'draw' your designs. Also, this program lets you see what your characters will look like when displayed real-size as you work on them. When you have finished, the program will automatically convert the design into complete VDU23 statements which are then easily merged with your own program.

The program has been tested on BBC OS versions 0.1, 1.0 and 1.2 and will also run on the Electron. The program uses mode 4 so you will see what your characters look like in 40-column mode. You will have to stretch or contract them mentally if you want to use them in 20 or 80 column modes.

Starting the program

The program first asks you four questions, as follows:

No. of chars. across (1-5, default = 1)?

Answer with a number between one and five representing the number of character tiles you want across the screen. Just pressing Return sets the default value of one.


No. of chars. down (1-3, default = 1)?

Type in a number between one and

three. Conceptually, the block of character tiles can be thought of as a single 5 × 3 shape, or several smaller shapes. You can, of course, treat each tile as a separate character, in which case *Budge* will let you define up to 15 of them in one run.

ASCII codes for chars. to start at (224-2XX, default = 224)?

where the value of XX will depend upon the values given in answer to the first two questions. The BBC and Electron micros let you define ASCII codes 224 to 255. You must say at this point which character numbers you want to define. If you have no other graphics characters then just pressing Return will give

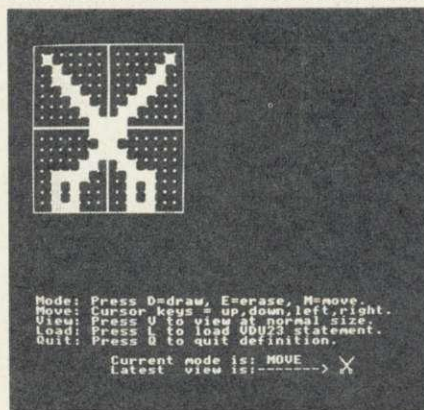

Scissors icon designed using Budge

you the default of 224 onwards.

1st line no. for VDU23 statements (1-32000, default = 1010)?

Graphics characters are defined by means of statements of the form:

lineNo VDU23, charNo, a,b,c,d,e,f,g,h

You need to tell *Budge* which line numbers you want to use for these statements. They will run in steps of 10 from the value you specify. They should not clash with any lines you are using for other bits of your program. I always have a procedure called 'init' starting at line 1000 which is called from any early line number in my programs: hence the default value of 1010 if you just press Return.

Defining graphics shapes

Once all the questions have been answered the screen is cleared and the set of tiles is displayed. Each tile is split up into an 8 × 8 array of cells representing the individual dots of a graphics character. Below the tile display the single key commands now in effect are summarised.

In the top left-hand corner you will see the cursor winking. You can move this cursor around the tile array by using the four cursor control keys in the top right-hand corner of the keyboard. These are the keys you normally use for editing programs.

What happens when you press the cursor keys depends to some extent on the mode that the program is currently in. Initially, the mode is set to 'move', and moving the cursor around does nothing to the display. By pressing D you set the mode to 'draw'. Moving the cursor now leaves a trail of white blocks in cells through which it passes. You can, of course, hold down the cursor keys to gain speed from the auto-repeat feature. You can't shoot off the edge because *Budge* will beep if you try to move outside the tile array.

The third mode is called 'erase' and is obtained by pressing E. In erase mode any white blocks in cells through which the cursor travels are wiped out. If you want to move to a different place without erasing or drawing blocks you can press M to set the mode back to 'move'. The mode change commands, D, E and M, can be given at any time between cursor movements.

Viewing your work

Pressing V, for View, at any time during the definition phase causes processing of the current tile display. You will see the cursor moving through the tiles of the display. *Budge* is constructing VDU23 statements for each tile. When processing is complete a real-sized copy of the tile display will appear in the bottom right-hand corner of the screen. This is useful because often shapes that look all right as a large block pattern look wrong when printed

the correct size.


When the real-sized display has appeared you are invited to press any key to continue. Doing this returns you to the command summary but does not delete the real-sized display. The mode is always set to 'move' when you return, irrespective of which mode was active when you pressed V. The cursor will, however, be wherever you left it. At this point you can add to or modify the display as usual. The real-sized version will not be updated, however, until you press V again.

The Load command

Pressing L at any time lets you load a VDU23 statement into the tile display. Use this option if you already have some parts or all of a shape defined as VDU23 statements and you want to modify it. When you press L the command summary disappears and is replaced by:

LOAD: Which tile across (1-X/1)?

where X will be between one and five depending on the width of your tile display. Type a number between one and X and press Return. On the next line you are asked a similar question for the vertical position of the tile you want to replace. When you have done this, any cells in the specified tile which are

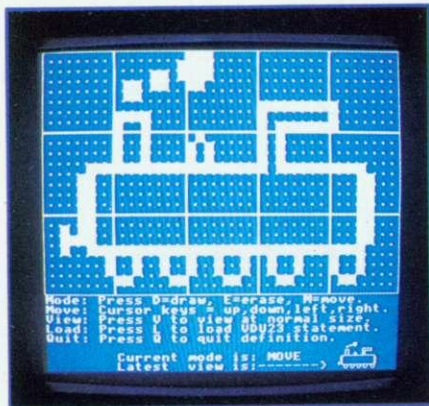

The 5 × 3 grid is adaptable

occupied by white blocks will be cleared, and below you will see:

Type in values from VDU23 statement:

Dot value for row 1 (0-255/0)?

You must now type in the first of the eight numbers following the character number in the VDU23 statement. If this statement was

VDU23,224,1,3,7,15,31,63,127,255

you would type 1 and press Return. The block pattern for the first row, corresponding to the number you have typed, will appear at the appropriate place on the tile display. Type in the remaining seven numbers to complete the defi-

nition of the tile. After the eighth number the command summary will replace the loading instructions again. The cursor will be where you left it when you pressed L and the mode will be set to 'move'.

Finishing off

When you have finished drawing (and perhaps redrawing) your shape(s), you press Q to quit the definition phase. Make sure you really have finished because you cannot go back to change the tile display once Q has been pressed. It does not matter which mode you are in or where the cursor is when you do this. You will see the command summary disappear, to be replaced by the word PROCESSING. Above, you will see the cursor rapidly scanning through each character tile. Wherever there is a white block it is replaced by a # sign. There is no significance in this – it's just done to keep you informed of progress.

As each tile is processed the ASCII code for the character is printed in the top left-hand part of the tile. Once the processing is complete the program waits until you press any key before continuing. At this point it is a good idea to write down the ASCII character numbers and a description of them for future reference.

When any key is pressed, the program

asks whether you want to save your VDU23 statements in a file or have them printed on the screen. Pressing F for file results in a file name being requested. Once given, the VDU23 statements are written as an ASCII file so you can merge them with your program by first loading it into memory and then typing *EXEC filename.

If you press S for screen then the VDU23 statements will be listed on the screen. At this point, these program lines are not stored in the computer's memory. To merge them with your own program, load it into memory and then 'cursor over' all the statements using the cursor and Copy keys just as if you were editing – but without making any changes in the lines. The screen display is more convenient if you do not have disc drives.

Program details

It's not necessary to understand how the program works in order to make good use of it. However, for those who would like to know how it's done, you'll find a brief description of all the variables in the table above and some notes on the listing on the yellow pages.

The Budge listing to allow you to draw icons is on yellow pages 104-106.

VARIABLES

A%	loop index for X-co-ordinates
B%	loop index for Y-co-ordinates
C%	char. sequence no. (0-14)
D%	bottom limit of tile display (7,15 or 23)
E%	offset for screen value
F%	flag used in PROCerase
G%	flag, G% = 0 View command, G% = 1 Quit command
H%	height of tile display (1-3)
I%	loop index over rows within tile
J%	loop index over cells within row
K%	saved value of X% (cursor co-ord.)
L%	left limit of tile display (always 0)
M%	mode: 1 = erase, 2 = draw, 3 = move
N%	dot value for row, used in Load command
O%	saved value of Y% (cursor co-ord.)
P%	X-co-ord. of tile origin (0, 8, 16, 24 or 32)
Q%	Y-co-ord. of tile origin (0, 8 or 16)
R%	right limit of tile display (7, 15, 23, 31 or 39)
S%	sum of V%s for current row (0-255)
T%	top of tile display (always 0)
U%	ASCII char. no. for 1st user-defined char.
V%	row cell value (128, 64, 32, 16, 8, 4, 2 or 1)
W%	width of tile display (1-5)
X%	current screen X-co-ordinate
Y%	current screen Y-co-ordinate
Z%	ASCII code of command key pressed
CHAN	Channel no. for data file
LI	line number for 1st VDU23 statement
vdus\$(14)	string array for VDU23 statements
val%(14,8)	dot row values (used to make View display)

SERIOUS SOFTWARE

FOR THE B.B.C. MICRO

DISCMASTER

The New Disc Utility

- ★ Eleven Powerful Utilities
- ★ Covers all aspects of disc usage
- ★ All called from a single menu



A tremendous collection of utility programs... A godsend to disc users.


EDUCATIONAL COMPUTING JANUARY 1985

FEATURES INCLUDE:

- 1) DISC EDITOR/STRING SEARCH**
A string search routine combined with a full screen editor, simply overtype on the screen (in hex or ascii) to update the disc.
- 2) RECOVER**
Recovers programs lost by accidental deletion or disc corruption.
- 3) MOVEDOWN**
The command *RUN will load, move down and run your long programs automatically, if you add this routine to them.
- 4) DISC MENU**
A colourful automatic menu to add to each of your discs, which will move down and
- 5) INDEXER**
Creates an information index file for all of your discs, which may then be displayed, up-dated or printed to help you keep track of your programs.
- 6) COPIER**
Transfer a whole cassette of programs onto disc automatically. (Will not copy protected cassettes).
- 7) LINK**
A utility to automatically call and insert useful routines from your own library, into your development programs.
- 8) OVERLAY**
Enables procedures or functions to be loaded from disc and overlayed into your program as it runs, allowing you to run programs much larger than available memory.
- 9) 40 to 80**
Insert your 40 track disc, 5 minutes later remove the disc which is now in 80 track format and still has all of your programs on it.
- 10) DUAL CATALOGUE**
Enables 61 files to be saved per disc surface instead of just 31.
- 11) FORMAT**
A speedy program to format or verify 40 and 80 track discs.

MASTERFILE II The Powerful Disc Database

- ★ Combines with Wordwise/View to produce standard letters
- ★ Ideal for Home, Business and School
- ★ Fast, Powerful and Simple to use

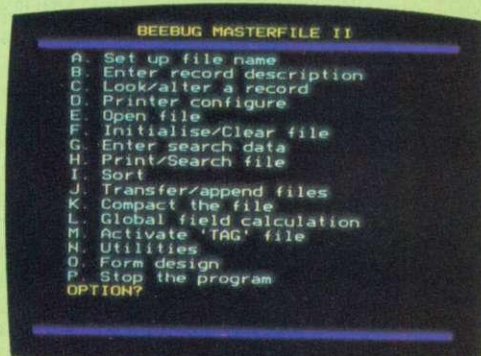

MASTERFILE is a general purpose file management package allowing large amounts of information to be stored and processed. It is extremely powerful yet flexible and easy to use.

Once set up, the information may be retrieved, sorted on any field, displayed, updated, printed etc, as required.

FEATURES INCLUDE:

- Up to 18 fields per record.
- Field size of up to 255 characters, record size limited to one screen.
- Any number of records per file (up to the full capacity of one disc surface).
- Field types of string, integer, numeric, decimal and date.
- Flexible data entry and update.
- Fast tag sorting (typically sorting 200 records a minute) and allowing subsets to be created.
- Spreadsheet-like facilities allowing global updates.
- Information on the database may be printed in almost any format and may include text from Wordwise or View files.
- Special multi-label printing facility.
- Output may also be spooled for use with Wordwise or View.
- Fully 6502 second processor compatible.
- Supplied with a comprehensive manual.

BEEBUG SOFT

MASTERFILE II **£19** (Specify 40 or 80 track disc)
DISCMASTER **£19** (Dual format disc)

Available from your local dealer and selected branches of

Post and packing 50p Prices include VAT



ACCESS ORDERS TEL: PENN (049481) 6666

ENQUIRIES


TEL: ST. ALBANS (0727) 60263

Mail Order to: BEEBUGSOFT, Dept. 13, P.O. Box 109, High Wycombe, Bucks.


B.B.C. Micro

SLEUTH

Looking for bugs in your Basic?
Let Sleuth track them down.

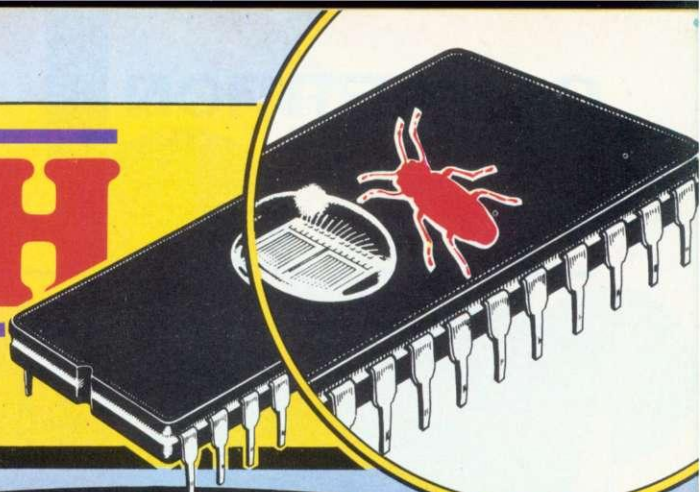

Here at long last is the **ULTIMATE DEBUGGING TOOL** for the Basic programmer!

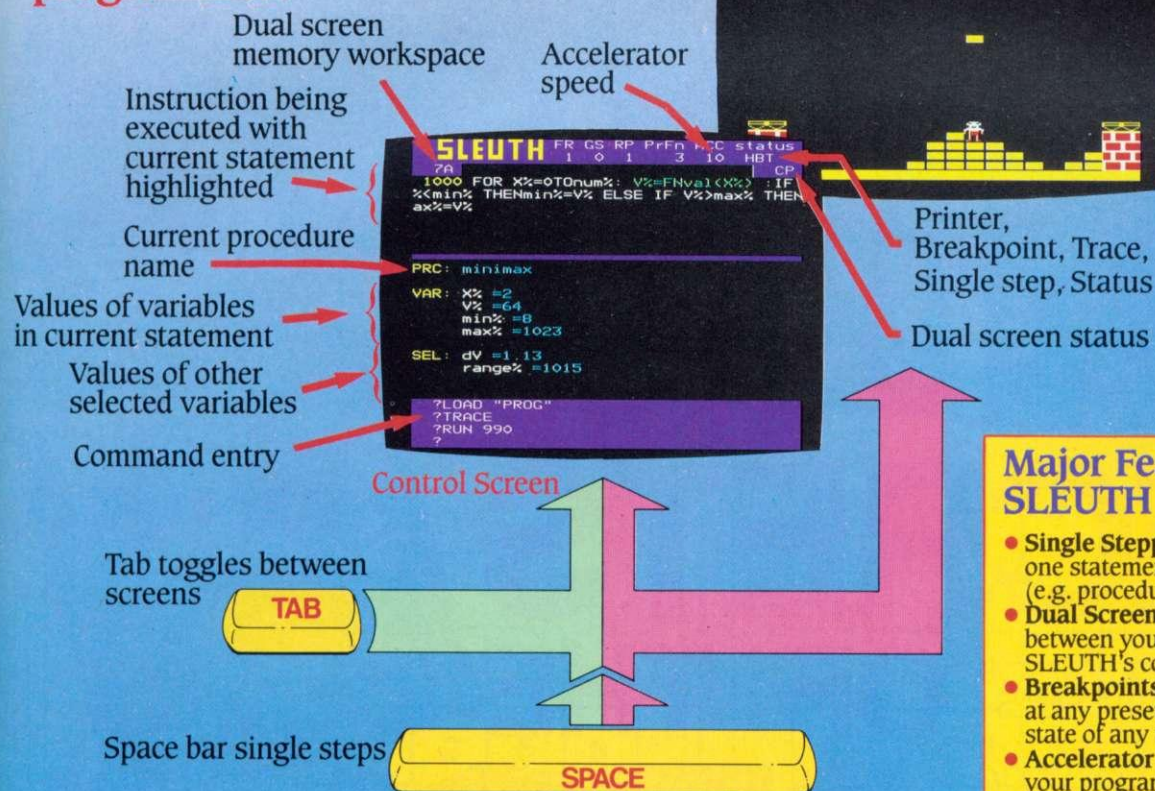

SLEUTH allows you to single step through your Basic program instruction by instruction, watching your screen display as it is built up. Simply press the Space Bar to execute the next instruction. Alternatively you may watch SLEUTH's control screen as you step through your program. (Press Tab to toggle between your own screen and the control screen.) This will show you the next instruction to be executed and allow you to list any part of the program. Also displayed will be the contents of all variables associated with the current instruction and the values of other specified variables. At any time you may alter the values of

any variable or update memory. You can even change the line number of the next instruction to be executed or alter the logic within a program statement. Then simply press the Space Bar to watch the next instruction execute. Breakpoints may also be set up at any position in your program, these allow you to speed to the problem area and then see exactly what's happening. You may even set conditional breakpoints. e.g. Stop IF A%=20. Advanced trace and decelerator facilities are also included. The decelerator allows you to alter the speed at which your program executes, actually as it is running.

SLEUTH is ideal for the novice and expert alike and will prove to be instantly invaluable, saving hours of debugging time. In addition, the single stepping facility makes it a powerful teaching aid.

**BEEBUG
SOFT**

Price **£29.00**

TEL ST. ALBANS (0727) 60263

MAIL ORDER (POST FREE) TO: BEEBUGSOFT,
Mailing Dept 13, P.O. Box 109, High Wycombe Bucks.




Major Features of SLEUTH

- **Single Stepping through Basic** - one statement at a time or a block (e.g. procedure) at a time.
- **Dual Screen Operation** - flip between your program screen and SLEUTH's control screen.
- **Breakpoints** - pause your program at any preset line number, or on the state of any variable.
- **Accelerator** - adjust the speed of your program from full speed to freeze frame.
- **Full Feature Control Screen** - monitor and update vital aspects of your program as it runs.
- **Trace** - a sophisticated line trace facility operating when program runs.

Control Screen Features

- Control screen entered at the press of a key.
- Select edit or single-step mode.
- Adjust program run speed (1-100%).
- View the current program line with the current statement highlighted.
- List the whole or any part of your program.
- Alter the next line number to be executed.
- Read and adjust the value of variables in the current statement.
- Read and adjust the values of any other specified variables or array parameters.
- Insert or remove breakpoints and conditional breakpoints.
- Return to the program screen or continue to single-step or to run at any speed.

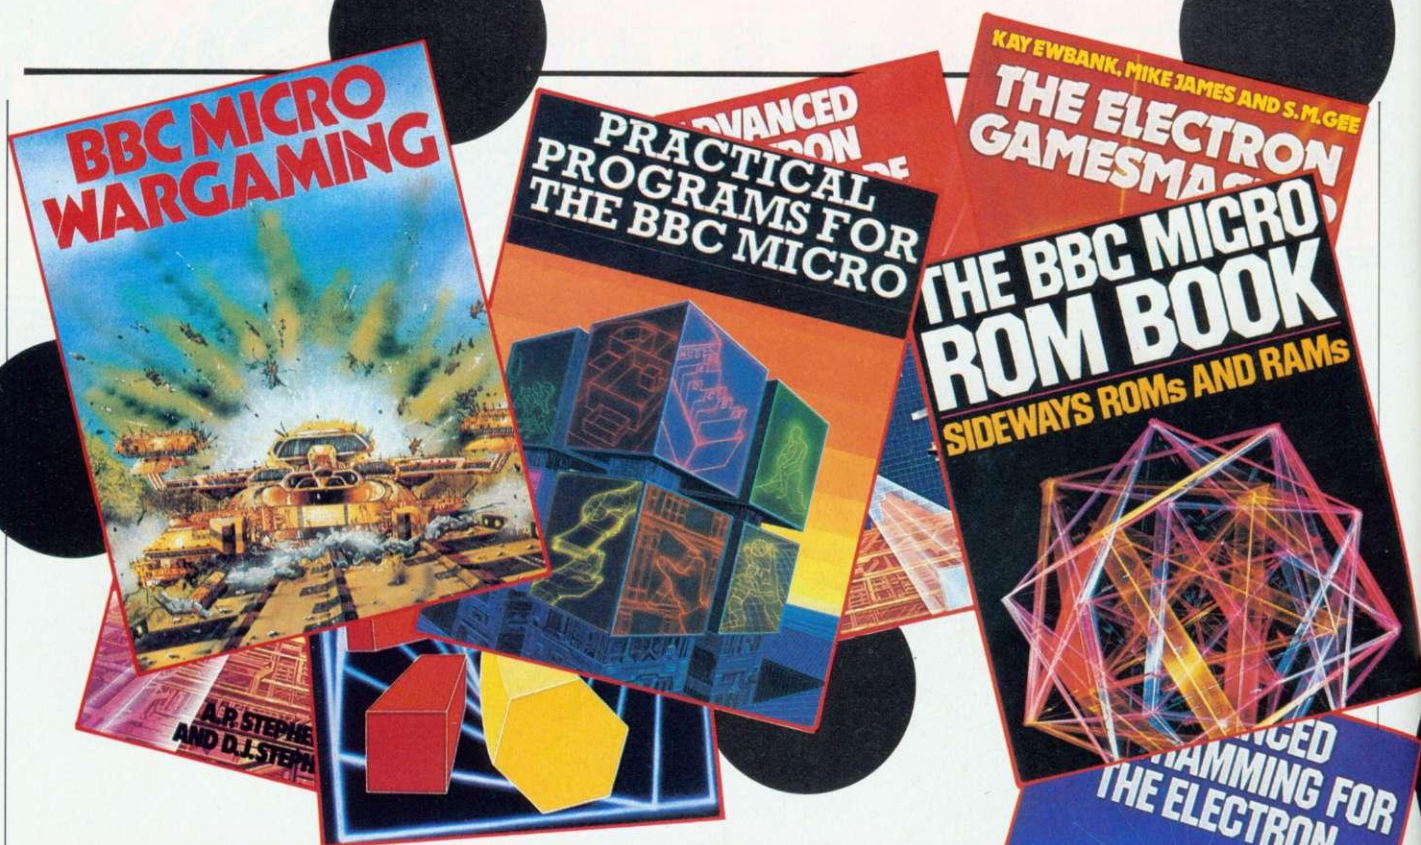

SECRETS OF THE STONE

Simon Dally sets an ancient puzzle that could win you a bumper prize

TAKE A LOOK at figure 1. First analysis suggests nothing special about it, but closer inspection shows:

- It contains all the digits 0-9 exactly twice
- The 13 numbers obtained by reading from left to right and downwards are all exactly divisible by 7

So far, so good. There are many ways in which you can arrange the twenty digits to have this property. What makes this one special is that it was inscribed on a block of stone inside the step pyramid at Saqqara, constructed by the first recorded architect, Imhotep, in approximately 3000 BC. Accompanying hieroglyphics have been deciphered to read: 'Secret of Zoser, King

of Upper and Lower Egypt'.

Zoser is known to have been a passionate mathematician and the appearance of a harp player on the stone suggests a general hymn of praise to the harmony of mathematics.

In 1932 an Egyptologist and mathematician, Dr Kirederf, caused a sensation by pointing out that the significance of this mysterious arrangement could be explained by posing the puzzle: 'How can you arrange the digits so as to obtain the highest possible sum from multiplying the 13 numbers?'. Astonishingly, the solution immortalised on the stone is not the highest possible product but the second highest!

The sensation was caused by the fact that it proved beyond doubt what many

scholars had long suspected – that the Egyptians, or at least some of them, knew the decimal system. But it poses some intriguing questions. Did Imhotep, who was later himself deified, not know the highest (figure 2)? Or was he teasing the viewer to find the highest for himself?

Is there some deeper, so-far unperceived meaning?

We can only speculate.

In this month's puzzle you must follow the same rules (the same grid pattern, all digits used twice, all 13 numbers divisible by 7) to find the arrangement that gives the highest sum when the 13 numbers are added together.

There are two solutions – either will suffice.

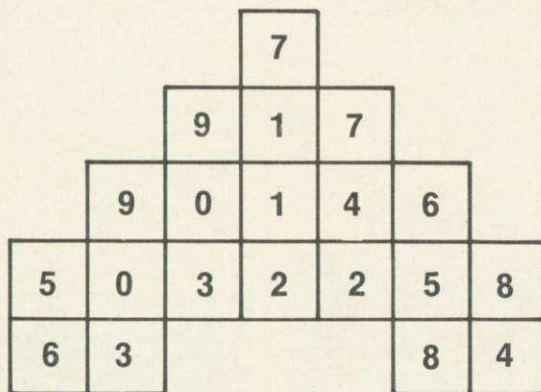


Figure 1. Saqqara stone

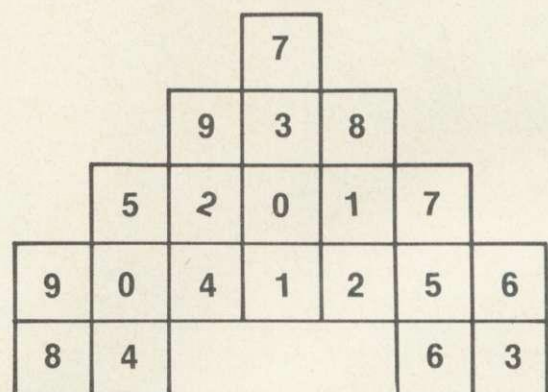


Figure 2. Highest possible product

PRIZES

THERE are 50 Acornsoft software packages, either for the BBC Micro or the Electron, to be won by the senders of the first correct answers out of the hat, so please state on your entry which Acorn micro you own – if you don't you'll be disqualified.

We've got 20 Granada books to give away as second prizes to 10 runners-up – two each for the next five correct entries from Electron owners and two each for five Beeb owners.

Answers on a postcard or back of an envelope, please, to arrive not later than May 3, 1985. Address your entries to April Competition, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

DECEMBER WINNERS

DECEMBER'S competition to win a bar code reader produced a healthy entry – nearly 400. However, unusually for this magazine, barely 10 per cent of entrants got it right, most of you stumbling over the mathematical questions: maybe Christmas went to your heads. The answers were as follows:

Problem 1: 987652413 – 102347586 = 885304827

Also allowed (just) was 012346587 as the minimum

Problem 2: $14^3 + 15^3 + 16^3 \dots + 25^3 = 312^2$

Many of you fell into the trap of $25^3 + 26^3 \dots + 29^3 = 315^2$

Problem 3: Mad Alex had 20 gallons

Problem 4: 772 peals

Table 1 A: Troll, B: Dwarf

Table 2 A: Dwarf, B: Troll, C: Troll

Table 3 A: Dwarf, B: Troll, C: Dwarf

Table 4 A: Troll, B: Troll, C: Troll

Depending on your answer to question 1, therefore, the correct solution is either 1770708894 or 1950710892.

The winners of the bar code readers donated by Addison-Wesley were: John Hunt of Stockport, D G Hall of Crawley, Michael Warwick of Ascot, Graham Goddard of Yelverton and Sean McGoogan of Ayrshire. The five runners-up have been notified by post.

1. July/August 1982 The first issue. Articles on drawing techniques. The BBC Computer Programme. Machine code graphics. Questions & answers. Hints and Tips. Sound. Interfacing scientific instruments. Dumb Terminals for 0.1 machines. Disc drives. Econet in schools.

2. September Ceefax telesoftware. Beeb in business. Mailing list. Simple files. 30-Hour Basic course. Art on a micro. Music. BBC micro as a key-



board. Extra Atom commands. BBC Basic board. ULA design. Teletext graphics. Machine code graphics. Analogue input. Schools training. 0.1 cassette bug patch.

3. October Electron details. BBC TV series—confessions. Two Epson graphics dumps. Seikosha GP100 dump. Worldwide networking for BBC micro. Garbage handling. Voice ROMs. Sound pitch envelope. Moving graphics. ZX printer for Atom. RGB colour separations for Atom. Biofeedback. Book reviews.

4. November Teletext. Second BBC TV series. Machine code series 1. Programming forum. *Trek III*. Speeding up graphics. Bomber game listing. 7-tone Epson graphics dump. Atom graphics manipulation. Dumb terminal for 0.1 machine. Firework graphics. Editing tips.

£1-25

5. December BBC TV in schools. Machine code 2—registers. Programming forum. Program generators. Carols. Hints & Tips. Logo and Turtle graphics in schools. Introduction to procedures. Software review. Atom word processing. Toolbox review. 16-colour graphics on model A. Sorting. Sound envelope design.

6. January 1983 MEP school launch. *FX commands for sound. Second BBC TV series. Machine code 3—two pass assembly. Disc drives for the Beeb. Programming forum. Program protection. Micros in schools—new series. Commodore Pet printer used with Beeb. BBC programs written on an Atom. Extra Atom memory.

7. February 1 MHz bus examined (4). 3D Atom graphics (3). Atom BBC Board reviewed (3). Machine code 4—memory (5). BBC Computer Literacy update (1). Atom error handling (2). Micros in schools 2—getting organised (6). Hints and Tips (4). Beeb Forum (3). Reviews of *Wordwise* (2) and the Amber printer (1).

8. March Chess on the BBC micro (3). Sound on the Beeb (4). Printers for beginners (4). Atom analogue converter (2). Schools 3—micros and maths (6). Machine code 5—indirect addressing (3). DIY lightpen (5). MEP's *Microprimer* review (2). Atom Ross toolkit review (1). Beeb Forum (2). Assembly language and Pascal book reviews (2).

£1-25

9. April *Hexangle* game listing (4). Bach on the Beeb (4). Hints & Tips on disc drives (4). Machine code 6—the CALL statement (4). Interfacing the 1 MHz bus (3). Schools 4—young children and micros (6). Graphics listings (2). Printers for beginners 2 (4). Reviews of BCPL, educational software and Atom software (3).

10. May Review of Basic II(1). Graphics listings(1). New *FX calls in OS1.2(1). Colour mixing on the Beeb(4). Jazz, blues and folk on the BBC(6). Schools 5—language development(6). DIY Beeb interface box(4). Atom sound board(5). A to Z of printing: how to get going(4). Hints and Tips: PROCs, discs and FNs(5). Printer, software and book reviews.

11. June Techniques series—sorting(2). Hints and Tips: 50p network(5). Drawing techniques and CAD(5). Machine code: interrupts(6). Schools



6—information technology. Atom Forum. Beeb Forum. Printers—write your own graphics dumps(4). Comparative review of *View* and *Wordwise*(3). Three graphics packages reviewed(3). Test of *Acorn User's* interface box(4). **12. July** Techniques—hash tables(2). Hints and Tips: logic made easy(5). Recursion and graphics(6). Handling strings(3). Two ideas for passing variables(2). Beeb aids the blind(2). DIY

second keyboard(5). Beeb Forum. Sounds on the Atom(2). Hardware, firmware, software and book reviews. Atom Forum.

13. August Printer graphics and dumps(2). Techniques—Tree structures and sorting(2). All the fun of the fair(7). 40/80 disc copier(2). Colour painting(5). Basic II: random access



files(2). Screen dumps for Olivetti, Centronics and Seikosha(5). Atom strings(3). Reviews of Tandy CGP115 printer, five educational packs, A to D converter.

£1-25

14. September Techniques—ink-blots and mazes. Painting by lightpen. DFS space explored. Beeb Forum. *Mega Monsters* game listing. Machine code graphics dumps. Atom Forum. Atom cassette recorder check. Reviews of Atom RAM boards, Cumana disc manual, *Logo* for schools, Hobbit floppy tape and books.

15. October Women and computing. Techniques—random numbers. Review of Computer Concepts' *Beebcalc*.



Fractal graphics. 57 files on 40 & 80 track discs. *Vampire* game listing. Beeb Forum. Assembly code controls tab key. Osfile merging. Atom future. Atom


verify routine. Reviews of *Vu-Type*, Procyon Atom book, Epson FX80, Teletext adapter, disc drive, software.

16. November Techniques—impossible problems. Contour graphics. Connecting two Beebs together. XREF: sorts & lists variable, function and procedure names. Assembler utilities in Basic II. OS, VDU, *FX, OSBYTE calls—pull-out poster. Disc overlays. Adding extra Atom commands. Reviews of 7 educational packs, Atom ROM, books, games.

£1-25

17. December Random graphics. Animated graphics in colour. Techniques—graphs. Hints & Tips. Universal printer dump. 6522 connected to the Electron. Saving machine code. Beeb Forum. Graphics pull-out poster. Index: July 82–July 83. Forum Extra: EQUUS. BBC helps the disabled. Schools—data processing. Transferring data between Beebs, Atoms... or Pets. Atom block demolition utility. Atom disassembler program. Reviews of software, books, educational programs from Chalksoft.

18. January 1984: Games special issue Techniques—graphs part 2. Stacks and queues. Basic and languages. Hints & Tips. Voice chip revealed. How to write games. Electron interfacing. Beeb Forum. Life graphics routines. *Defencecom* game listing. *The Train Game* listing. Machine code graphics. Where to put machine code. Schools—handling data. Juki daisywheel printer examined. Atom Forum and adventure.

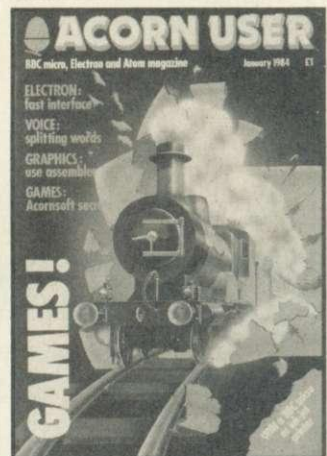


Reviews of utilities, software, *Beeline* wordprocessor, educational packages, two chess programs.

19. February: Adventures special issue Techniques—efficient sorts(3). PROC for a numeric keypad on the Beeb keyboard(1). 12 graphics listings(1). Random access filing on disc(5). Locking files(2). MCP40 printer/plotter looked at(5). Hints & Tips(3). Beeb Forum(2). Make discs readable on 40 and 80 track drives(4). Screen memory organisation(3). Hints on adventure design(3). Adventure action(4). Adventure ideas in computer language(2). Text compression(2). Word-crunch-

ing(4). VIA chip on Electron to drive a parallel printer(3). Atom Forum(2). Schools—simulation packages(4). Reviews: *Disc Doctor*, Leasalink's DFS upgrade, Hitachi's microdrive system, Solidisk's sideways RAM board, software.

20. March Utility: timing routine. Fractals. Teletext and mode 7 dump. ROMs reviewed. Hints & Tips. Beeb Forum. Add sounds to your games. Learn Lisp

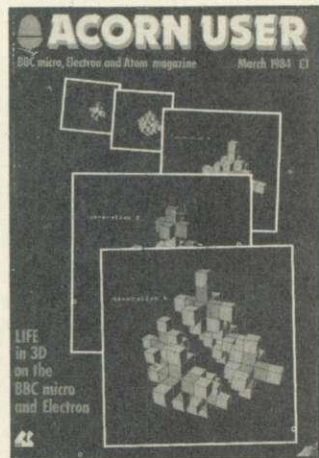

1. Cube graphics. Printer driver for View. Basic II from Basic I. Beeb's ADC chip. Atom Forum. Listing formatter for the Atom. Atom 'bytes free' routine. Schools—test of *Factfile*. Keyboard skills. Amcom DFS v Acorn DFS. Reviews: *Beebpen* wordprocessor, Atom expansion system, software, books.

21. April Beeb graphics on TV(3). 6845 chip explored(3). Advanced filing systems(1). Lisp 2(4). Hints & Tips(3). Beeb Forum(4). Choose disc tracks to copy(4). Function key editing(4). Teletext dumps(3). CES scrutinised(3). Passing variables(2). Computer Concepts' graphics ROM(4). Schools—simulations(4). Calculating Easter dates(3). Better programming(3). Atom Forum(2). Atom ROM routines(5). Converting BBC to Atom Basic(2). Three printers compared(2). Reviews: software, Aries B20 RAM board, *Toolkit*, Monitors.

£1-25

22. May Bitstik graphics system. Hints & Tips. 6502 second processor examined. Lisp 3. Beeb Forum. Disc utility to keep track of available space. Statistics. Pattern graphics. OSWORD explained. 4 colour graphics listings. Second-hand



disc drives. Education—do girls get a fair deal? Atom Forum. BBC to Atom

Basic 2. Reviews: British Micro's *Grapad*, *Edword* wordprocessor, 4 sprite generators, Opus microdrive, *Beasty*, software.

23. June Acorn Z80 second processor(3). Forth(2). Graphics to brighten up your games(2). Soft Pottery graphics(4). Go faster and save



memory space(3). Rapid search and load routine for tapes(2). How the Beeb and Electron work 1(3). Business: reviews and how to gently enter office computerisation(4). Education—adult literacy(3). Dumping Atom programs on the BBC(2). Atom Forum. Software copyright laws(2). Hints & Tips(4). Techniques—B-Trees(3). Beeb Forum(2). Reviews of monitors, printers, books, software, adventures, EPROM programmer.

24. July Communications: the future; portable micros; modems & electronic mail. Hints & Tips. First Byte: using your micro. Beeb Forum on Basic. How it works II: slow down the Beeb. Business: Acorn's Z80 software, Starbase ROM. Education: a look at Edfax, how to teach facts. Atom Forum. Converting BBC to Atom Basic. Reviews:



Electron Plus-1, Solidisk's 128k RAM board, three IEEE interfaces, Canon colour and Brother printers, ADE ROM.

25. August Downloading the weather. Teaching tots: keyboard overlays, activity board. First Byte: writing & debugging programs. Hints & Tips. Beeb Forum: 6502 second processor & Tube tips. How it works III: random numbers. Business: Plan software for Z80. Atom Forum, avoiding errors. Reviews: 3 drawing packs, Torch Unicomm, MCP's Interbeeb, software plus for Micronet.

26. September Decoding radio signals, First Byte: getting moving. Hints & Tips. Education: problem solving. Sprite design and animation part I. Beeb

Forum: fastest dump. Write your own disc formatter. How it works IV: random number generator. Business: Nucleus software for Z80, accounts. Atom Forum, ? and !. Reviews: Torch Unicorn, Quinkey, Parfitt plotter, Turbo compiler, Multi-aid.

£1-25

27. October The BBC and space. First Byte: noises on the Elk. Hints & Tips. Sprite design and animation part II. Programming the 8271. Sorting techniques. Diagnosing ills in the Beeb. Beeb Forum: NFS update. Education: report on government scheme, review of Microtext. Atom: wordprocessor. Communications: bulletin boards. Reviews: Basic utility ROMs, sideways ROM sockets, Bearsoft's Editor, Watford's Buffer & Backup, Ampersand's Colour module.


28. November Acorn's ABC range. First Byte: drawing. Hints & Tips: 3D-effect printing. Sprite design and animation part III. Floating point variables. ROM juggler. *Micro Live*. Education: news, Edword in the classroom, school quiz. Atom forum: hardware, the Auto command. Reviews: Six turtles and buggies. Toad's extension socket, Watford's Speech Synthesiser and



Beebfont ROM, BBtype, Romex 13 ROM board, 3 language coaching packs, two graphics tablets.

29. December Guide to bar codes. First Byte: text & graphics windows. Hints & Tips: control codes for Epsoms. The

Domesday project. Low-cost keyboard for the Beeb. Dumping games' screens. Speed up your micro. DIY database. Education: news, science quiz, review

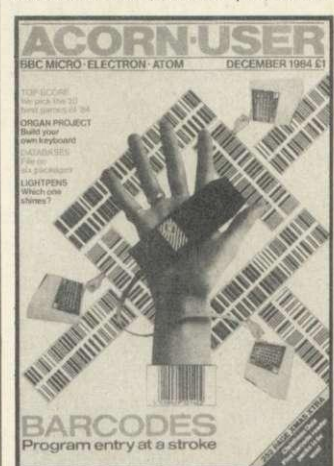

of the Dudley suite of software. Atom: Forum, build a ROM pager, competition. Reviews: 6 databases compared, part I of lightpens, Acornsoft's Logo and Pascal, best games of 1984.

30. January 1985 Games special: Quadline, Picture Puzzle, musical tunes. Colourfill graphics. Hints & Tips. Operation



Raleigh report. Setting up your own teletext database. Second processors examined. Education: news, activity board revisited. Reviews: 6 wordprocessors compared, three astronomy packs, software for lightpens.

Sold-out copies

Eleven issues are not available—July 1982; February, March, April, May, June, July and August 1983; February, April, and June 1984. Photocopies of articles are available at 18p a page (minimum charge 50p, inclusive of postage). Orders should be addressed to AU Photocopies, Redwood Publishing, 68 Long Acre, London WC2E 9JH. Figure in brackets indicate the number of pages in each article.


HOW TO ORDER

Fill in the order form on page 96 and send with your cheque or postal order for £1.25 per issue (made payable to Redwood Publishing) to Acorn User Services, PHS Mailing Ltd, PO Box 14, Horley, Surrey.

TWELVE TEMPTING TITLES

Acorn User presents 12 titles to captivate, entertain and educate. Could you run a railroad? ... find out with *Trains*. Try your hand at swordfencing with *Swordmaster*. Break into the computer with *Hacker 2000*. Beat the bacteria in *Corpuscle*. Face the final frontier in *Trek*. Try three great games with our compendium. Or see how good your adventuring skills are with *Vampire Castle* and *Flint's Gold*. What more could you ask for? All these tried, tested and developed by Micrograf.


94

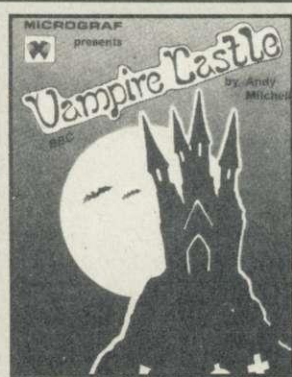

Make sure you play this adventure with the lights on. You can almost smell the dank odours and feel the terror around every corner.
£6.95 Cassette, £9.95 Disc (40/80) BBC micro only

TRAINS

This classic game by Peter Balch requires quick wits and clear thinking. Your aim is to manoeuvre a number of trains around a complex network of track, as you pick up fare-paying passengers and deliver them to their destinations.
£7.95 Cassette, £10.95 Disc (40/80)
BBC micro only




COMPENDIUM

Three Acorn User games. In HEXANGLE you and the micro take turns in drawing lines between six points. In MEGA MONSTERS you are confronted by waves of aliens while you rescue stranded mutants. VAMPIRE is a two-player action game.
£7.95 Cassette, £10.95 Disc (40/80) BBC micro only

HACKER 2000



In the year 2000 only two classes survive, Programmers and Proles. As a Prole, your only escape from a life of drudgery is to 'hack' your way into the massive Multivax complex in order to change your Brain Scan Report.
£7.95 Cassette, £10.95 Disc (40/80)
BBC micro only



In your search for the legendary Flint's Gold you will sail the Spanish Main to a land of blood-thirsty pirates.
£6.95 Cassette, £9.95 Disc (40/80) BBC micro only

SWORD MASTER

SWORD MASTER is one of the few two-player games around, and is designed for joystick or keyboard. It is based on the fencing rules written in 1190 by Herman von Salza for the Teutonic Order of Teutonic Knights.
£7.95 Cassette, £10.95 Disc (40/80) BBC Micro and Electron




CORPUSCLE

In CORPUSCLE you assume control of the body's defences, journeying into the three-dimensional labyrinth of the human arterial system. Invading colonies of bacteria advance relentlessly and you must destroy as many as you can.
£7.95 Cassette, £10.95 Disc (40/80)
BBC micro only

TREK

TREK was the first game to take advantage of voice synthesis on the BBC micro - and uses joystick or keyboard. Trek puts you in charge of a Starship with the task of wiping out an alien fleet.
£7.95 Cassette, £10.95 Disc (40/80) BBC micro and Electron



ACORN USER SOFTWARE

Please send me:	40/80 disc* Cassette* (£10.95)	Cassette* (£7.95)	Other title.....	40/80 disc* Cassette* <input type="checkbox"/>	<input type="checkbox"/>
Crazee Caverns	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Mars Mission plus Astro Blaster	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Grafpak plus Maze	<input type="checkbox"/>	<input type="checkbox"/>			
Tellscope	<input type="checkbox"/>	<input type="checkbox"/>			
Total value of my order is £					
I enclose a cheque/postal order payable to Redwood Publishing for £					
Please debit my Access/Barclaycard					
Account No	<input type="text"/>			Expiry date	<input type="text"/>
Name	Address			Post code	
Signed.....	Date.....				
Send this form with your remittance in an envelope to: PHS Mailing Ltd, PO Box 14, Horley, Surrey. All the above prices include VAT, postage and packing. *Tick appropriate box(es)					


STILL AVAILABLE

All these old favourites - *Vampire Castle*, *Flint's Gold*, *Trains*, *Sword Master*, *Compendium*, *Corpuscle*, *Hacker 2000* and *Trek* - are still available. Just complete the order form on the left and state which of these eight exciting games you'd like, then send the coupon to us together with your money.

GREAT NEW GAMES FROM ACORN USER

CRAZEE CAVERNS

CRAZEE CAVERNS: Pete the Potholer is on an epic journey through a fantastic underworld ruled by Willy the Wierd. Pete must take control of each of the caverns making up this empire step-by-step. To help in this task, a local wizard has coated his feet with a magic dye, so Pete can see how much ground he has covered.

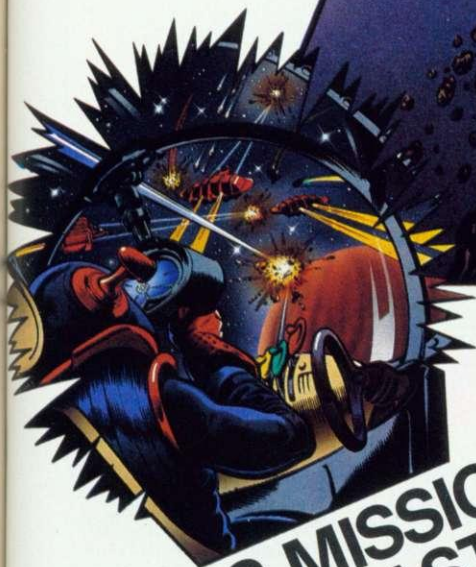

MARS MISSION + ASTRO BLASTER

MARS MISSION: Mars is your destination. The mission—to rescue fellow astronauts stranded on the bleak, hostile surface below. But between your orbiting space station and the safety of the colony's landing pads are the deadly meteor showers and marauding aliens.

ASTRO BLASTER: As commander of the SS Destroyer, you patrol space to seek out and destroy asteroid swarms threatening the fringes of civilisation—alien pirate ships prey on any ship they find. With every few waves, you must return to base to refuel, but beware, docking is no easy task.

Craze Caverns, Telescope, Mars Mission + Astro Blaster and Grafpak are available for the BBC micro at only £7.95 (cassette), £10.95 (40/80 disc)



TELESCOPE

TELESCOPE is an early learning package for 2 to 10 year-olds which provides a kaleidoscope of words, pictures and music. It is designed with options to test word/picture recognition and association, as well as memory and speed, and includes upper or lower case text. These options make it suitable for a wide range of ages, and for use with or without adult supervision. Although the application is serious, the emphasis is on fun, and to add to this a selection of nursery rhyme tunes is played while the program runs.

GRAFPAK

GRAFPAK is a mode 7 graphics utility incorporating machine code routines not available in other packages, eg Draw, Plot, Fill. It's easy to use and provides a useful tool for the construction of advanced text graphics for games, or any other software.

PLUS 3D MAZE—a game which not only provides an excellent demonstration of Grafpak and its speed, but also hours of fun. Machine code routines in both programs can be adapted for your own applications, making the package extremely good value for money.



ACORN USER

SUBSCRIPTIONS

Please start my subscription to Acorn User from the next available issue as indicated:

Beat the price rise!

	12 months	24 months
01: UK	£15 <input type="checkbox"/>	£30 <input type="checkbox"/>
02: Europe	£25 <input type="checkbox"/>	£50 <input type="checkbox"/>
03: Middle East	£30 <input type="checkbox"/>	£60 <input type="checkbox"/>
04: The Americas and Africa	£30 <input type="checkbox"/>	£60 <input type="checkbox"/>
05: All other countries	£35 <input type="checkbox"/>	£70 <input type="checkbox"/>

Name

Address

Please answer these questions to help us improve your magazine.

- Do you use your micro for?:
1 ☐ school 2 ☐ business 3 ☐ hobby
- Do you have, or intend to buy, any of the following?:
1 ☐ monitor 2 ☐ disc drive 3 ☐ second processor
4 ☐ printer 5 ☐ modem
- How many software packages do you think you will buy in the next 12 months?:
1 ☐ 0-5 2 ☐ 6-10 3 ☐ 10 or more

- ☐ I enclose my cheque/postal order/sterling bank draft payable to Redwood Publishing for £.....
- ☐ Please debit my Access/American Express/Barclaycard

Account no.

Expiry date

Signed..... Date.....

Send this form, with your remittance, in an envelope, to Acorn User Subscriptions, Redwood Publishing, 68 Long Acre, London WC2E 9JH

ACORN USER


SERVICES

BACK DATED ISSUES @ £1.25 per copy

	MONTH	YEAR	
..... AU	issue £.....
..... AU	issue £.....
..... AU	issue £.....
			Total £.....

BINDERS

In red with silver logo on the spine. Holds 12 issues of over 200 pages. ONLY £4.75 inc. p&p.



RP01

Binders

@ £4.75 £.....

Please add £1.00 each for overseas items. Please allow 28 days for delivery.

Name.....

Address.....

☐ I enclose my cheque/PO payable to Redwood Publishing for £.....

☐ Please debit my Access/Barclaycard

Account no.

Expiry date

Signed..... Date.....

Send this form, with your remittance, in an envelope, to Acorn User Services, PHS Mailing Ltd, PO Box 14, Horley, Surrey. All the above prices include postage and packing.

ACORN USER

SOFTWARE



DISC EXCHANGE SERVICE

Send in your copy of any Acorn User tape with a cheque for £3.50 and we will exchange it for a disc (which runs on 40 or 80 tracks).

NEW

24 HOUR PHONE SERVICE (02934) 72208

Please add £1.00 each for overseas items. Please allow 28 days for delivery.

MONTHLY PROGRAM LISTING CASSETTES

Please send me a cassette of all major BBC micro and Electron program listings (April issue) as advertised on page 95

@ £3.75

Total £.....

Name.....

Address.....

☐ I enclose my cheque/PO payable to Redwood Publishing for £.....

☐ Please debit my Access/Barclaycard

Account no.

Expiry date

Signed..... Date.....

Send this form, with your remittance, in an envelope, to Acorn User Software, PHS Mailing Ltd, PO Box 14, Horley, Surrey. All the above prices include postage and packing.

SET UP A SIMPLE TOUCH SCREEN

by Alf Ripool

READERS who saw the February edition of *Micro Live*, will be familiar with the concept of touch screens. The one demonstrated at the start of the program relied on an additional piece of hardware to convert the screen into an area sensitive to touch.

All the actual hardware for such a useful item of software does exist within the BBC and Electron micros. In the Beeb the Cathode Ray Tube Controller and Video ULA handle the screen, while the two have been combined into a single ULA in the Electron. The real problems in utilising these exist in writing the software – this is complex and often the timings required are very delicate. However, the software exists within the MOS of both

the correct addresses. Note that it is not possible to use this program on the 6502 second processor because Hi-Basic is copyright 1983, and the transience across the Tube is not suitable for the I/O processor slave.

The program presented this month, will enable you to use this technique to set up and initialise a touch screen. The area used for the touch screen is the full width and about two-thirds of the screen's height; the lower third of the screen is used for messages and text. Figure 1 shows the dimensions of the template you should construct. For best results thin white paper works best – black paper is out due to its albedo factor. The edge of the paper should be about 10 mm in from the edge of the screen.

Next you need to mark out sections onto the template (figure 2). I find a heavy black felt-tip pen ideal for this. First mark a square about the size of your thumb in each corner of the template. Mark the other boxes as shown – again keep each to about thumb size.

When complete, fix the template onto the screen, using a clear stickytape that has a flour-free base.

Load and run the program. This will prompt you to initialise each 'pad' area on the screen. This must be done with

care – if you are using an RGB monitor then you might need to repeat the process a couple of times due to the low phosphorescence screen ratios.

The program will first ask you to set the four corners of the screen so that it has a reference point. When prompted, use your thumb to cover the relevant square. During this time the MOS/patch will be scanning the video ULA to detect changes in polarisation. When you are sure that you have a firm and steady contact press the space bar. The area last detected with the most reverse polarisation (prior to pressing the space bar) will be selected as the appropriate point on the screen. Once each of the four screen corners have been set move onto the Yes, No and number boxes.

The touch screen can now be used as a direct replacement for the numbers and letters Y and N on the keyboard, and should work with any programs written in Basic you already have.

Next month I'll show just how simple it is to use the touch screen in this manner, with some simple but effective educational applications. In addition a short assembler routine will be supplied to allow a transparent version of the touch screen to be used with Acornsoft's *Elite*.

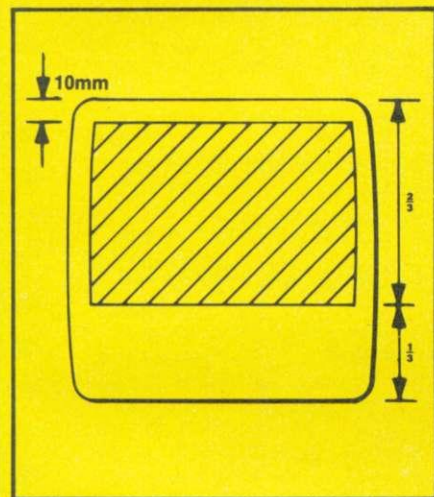


Figure 1. The paper template should only cover the top two-thirds of the screen and should be placed about 10 mm from the edge

machines, as we shall see.

The TV or monitor screen is primarily used to display the signal generated by your micro's video circuitry, but by reprogramming the correct sequence of video display registers it is possible to read the screen using a technique known as 'reverse polarisation' – the more technically-minded among you will probably know of this, however less learned readers can still use the technique, without understanding it. I would refer you to the *FTAD Journal*, of March 1982 for further details.

To use the MOS-based software we require just a simple machine code patch to ensure that the correct MOS addresses are set – this will of course depend on which issue Basic you have. Suitable PROCs are used to assemble

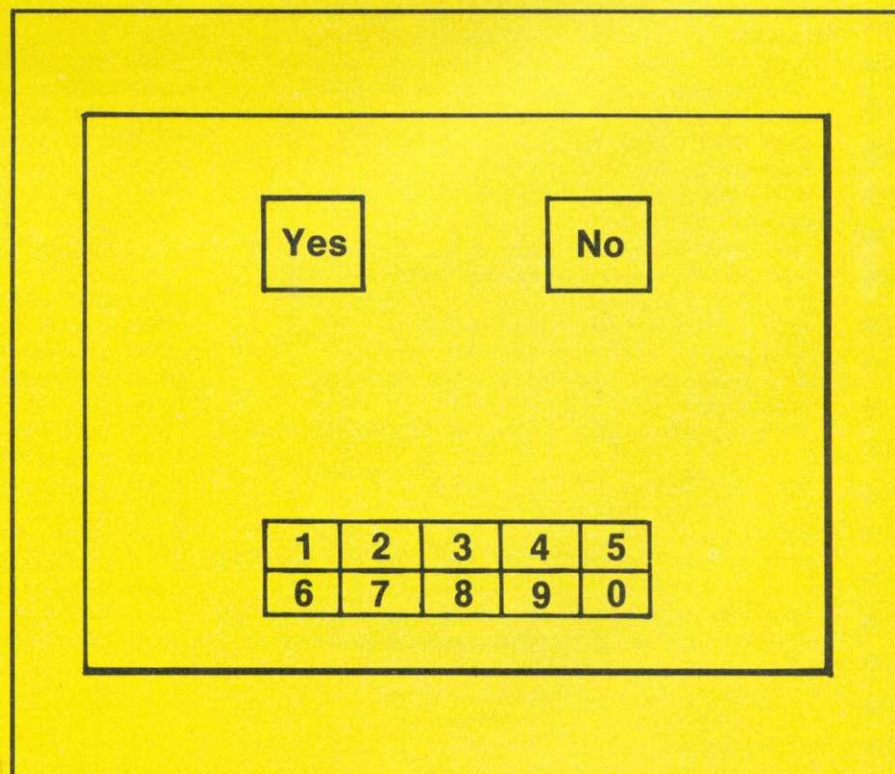


Figure 2. How to mark your template – use a heavy felt-tip pen

page 98 ►

Using the paper overlay described on page 97 and this listing you can add a touch screen to your micro

```

10 REM Touch Screen using MOS
20 REM by Alf Ripool
30 REM For BBC and Elk
40 REM (c) Acorn User April 1985
50 :
60 DIM patch 20
70 IF ?&B015=ASC("1") PROCbasicI
80 IF ?&B015=ASC("2") PROCbasicII
90 PROCassemble
100 MODE0
110 VDU 28,0,31,79,24
120 ?patch=&60
130 PRINT"INITIALISE SCREEN CORNERS:"
140 PRINT"WHEN PROMPTED PLEASE PRESS";
150 PRINT" SPECIFIED SCREEN CORNER," ;
160 PRINT" & HOLD DOWN SPACE BAR"
170 PRINT"UNTIL TOLD TO RELEASE"
180 FOR NZ=0 TO 5000:NEXT NZ
190 FOR LZ=1 TO 4
200 CLS
210 READ A$
220 PRINT"SET ";A$;" SCREEN, AND PRESS
SPACE BAR TO CONFIRM"
230 CALL patch
240 REPEAT
250 AX=255 : X%=1 : Y%=2 : C%=0
260 CALL patch
270 UNTIL GET=32
280 AX=128 : X%=3 : Y%=78 : C%=1
290 CALL patch
300 CLS : PRINT A$;" SET"
310 FOR NZ=0 TO 5000:NEXT NZ
320 NEXT LZ
330 :
340 CLS
350 PRINT"PREPARE TO INITIALISE YES/NO
SCREEN SEGMENTS"
360 FOR NZ=0 TO 617
370 AX=96 : X%=96 : Y%=96 : C%=1
380 CALL patch:NEXT NZ
390 FOR LZ=1 TO 2
400 READ A$
410 PRINT"SET ";A$;" , AND PRESS SPACE
BAR TO CONFIRM"
420 FOR NZ=0 TO 142: CALL patch:NEXT
430 REPEAT:CALL patch:UNTIL GET=32
440 CALL patch
450 CLS : PRINT A$;" SET"
460 NEXT
470 FOR NZ=0 TO 489: CALL patch:NEXT
480 CLS
490 PRINT"PRESS Y ON KEYBOARD TO CONTI
NUE"
500 REPEAT
510 UNTIL GET=ASC"Y"
520 CLS
530 PRINT"PREPARE TO INITIALISE KEY-PA
D"
540 FOR NZ=0 TO 617:CALL patch:NEXT NZ
550 PRINT"PRESS N ON KEYBOARD TO CONTI
NUE"
560 REPEAT: CALL patch
570 UNTIL GET=ASC"N"
580 CLS
590 FOR LZ=0 TO 9
600 READ B%
610 VDU30
620 PRINT "PRESS ";CHR$(B%);" ON SCRE
EN";
630 PRINT " - PRESS SPACE BAR TO CONF
IRM"
640 REPEAT
650 UNTIL GET=32
660 VDU30:PRINTSTRING$(50," ")
670 VDU 30
680 PRINT"KEY ";CHR$(B%);" CONFIRMED"
690 IF B%=48 THEN PRINTTAB(19,5);"0":G
OTO 710
700 PRINTTAB(B%-49+EVAL(CHR$(B%)),5);
CHR$(B%)
710 FOR D%=0 TO 5000:NEXT
720 VDU30
730 NEXT
740 FOR D%=0 TO 5000:NEXT
750 X%=1
760 FOR LZ=0 TO 9
770 READ B%
780 PRINTCHR$7;TAB(X%,5);CHR$(B%)
790 X%=X%+2
800 FOR D%=0 TO 3000:NEXT
810 NEXT
820 PRINTCHR$7;TAB(X%,5);CHR$(33)
830 END
840 :
850 DEF PROCassemble
860 P%=patch
870 [
880 LDA #&EA
890 JSR read1
900 ROL A
910 JSR read2
920 CLC : BIT ackn
930 JMP trans
940 ]
950 ENDPROC
960 :
970 DEF PROCbasicI
980 read1=&E072 : read2=&E981
990 trans=&E109 : ackn=&E004
1000 ENDPROC
1010 :
1020 DEF PROCbasicII
1030 read1=&E089 : read2=&E999
1040 trans=&E101 : ackn=&E00F
1050 ENDPROC
1060 DATA "TOP LEFT","TOP RIGHT"
1070 DATA "BOTTOM LEFT","BOTTOM RIGHT"
1080 DATA "YES SEGMENT","NO SEGMENT"
1090 DATA 49,50,51,52,53,54,55,56,57,48
1100 DATA 65,80,82,73,76,32,70,79,79,76

```

April Fool! Here's the listing to help you make fools of family and friends

```

10 REM Interactive Determination of
11 REM Intellectual Objectivity
12 REM Test Meter
20 REM Martin Phillips
30 REM For BBC and Electron
40 REM (C) Acorn User April 1985
50 :
60 MODE1
70 PROCinitialise
80 PROCinstructions
90 PROCscale
100 PROCrun
110 PROCcrash
120 END
130 :
140 DEF PROCinstructions
150 GCOLOR,1
160 PROCdouble("Interactive Determinati
on of",192,1007)
170 PROCdouble("Intellectual Objectivit
y Test Meter",96,928)
180 GCOLOR,3
190 PRINT"" The computer is connected
to a highly"
200 PRINT"sensitive amplifier which is
able to"
210 PRINT"monitor low-level, high frequ
ency"
220 PRINT"electromagnetic radiation."
230 PRINT" The human brain relies on ti
ny"
240 PRINT"electrical impulses to send m
essages."
250 PRINT"The strength and frequency of
these"
260 PRINT"impulses are a measure of the
activity"
270 PRINT"of the brain."
280 PRINT" This meter can detect these
tiny"
290 PRINT"impulses and by measuring the
frequency"
300 PRINT"and intensity of them is able
to"
310 PRINT"determine one's IQ."
320 PRINT" The aerial must be 50cm from
the fore-"
330 PRINT"head, and you must concentrat
e as hard"
340 PRINT"as possible on the simple pro
blems"
350 PRINT"presented at the bottom of th
e screen,"
360 PRINT"and say the answers out loud.
"
370 PRINT" The computer then sets the r
ate at"
380 PRINT"which the problems are presen
ted, until"
390 PRINT"it reaches an optimum speed.
Then the"
400 PRINT"computer will be able to calc
ulate and"
410 PRINT"display your IQ."
420 VDU19,3,4,0,0,0
430 GCOLOR,1
440 PRINT SPC(8); "Press space to start"
450 REPEAT:UNTIL GET=32
460 ENDPROC
470 :
480 DEF PROCinitialise
490 *FX11,0
500 X1=156:Y1=693
510 VDU5
520 VDU19,0,7,0,0,0
530 VDU19,3,7,0,0,0
540 VDU23;8202;0;0;0;
550 PX=0:PY=0
560 *KEY10 OLD:M MODE1:M VDU23;8202;0;0
;0;:M GOTO1390:M
570 ENDPROC
580 :
590 DEF PROCscale
600 GCOLOR,128
610 CLG
620 GCOLOR,3
630 FOR S=0 TO 20
640 angle=0.07*S+0.869:L=740
650 IF S MOD2=0 THEN L=L-24
660 IF S MOD4=0 THEN L=L-24
670 X=ABS(-640+(L*COS(angle)))
680 Y=120+L*SIN(angle)
690 MOVE X,Y
700 X=ABS(-640+(764*COS(angle)))
710 Y=120+764*SIN(angle)
720 DRAW X,Y
730 DRAW X1,Y1
740 IF S MOD4=0 THEN PROCdouble(STR$(S*
10),X,Y+80)
750 X1=X:Y1=Y
760 NEXT S
770 ENDPROC
780 :
790 DEF PROCbezel(text$)
800 GCOLOR,130
810 VDU24,0;0;1279;250;
820 CLG
830 GCOLOR,3
840 X=640-(16*LEN(text$))
850 PROCdouble(text$,X,175;
860 VDU24,0;250;1279;1023;
870 ENDPROC
880 :
890 DEF PROCpointer(val)
900 GCOLOR,0
910 PROCdrawpointer
920 angle=0.869+val*0.007
930 PY=50+750*SIN(angle)
940 PX=ABS(-640+680*COS(angle))
950 GCOLOR,1
960 PROCdrawpointer
970 ENDPROC
980 :
990 DEF PROCdrawpointer
1000 MOVE(640-(200/TAN(angle))),252
1010 DRAW PX,PY
1020 ENDPROC
1030 :
1040 DEF PROCdouble(A$,K,L)
1050 A%=&A:X%=0:Y%=&A:D=&A00

```

continued ►


◀ *continued*

```

1060 FOR T=1 TO LEN(A$)
1070 K1=K+(32*(T-2))
1080 B$=MID$(A$,T,1)
1090 ?D=ASC(B$)
1100 CALL &FFF1
1110 VDU23,240,D?1,D?1,D?2,D?2,D?3,D?3,D
?4,D?4
1120 VDU23,241,D?5,D?5,D?6,D?6,D?7,D?7,D
?8,D?8
1130 MOVE K1,L:PRINTCHR$(240);
1140 MOVE K1,L-32:PRINTCHR$(241);
1150 NEXT T
1160 ENDPROC
1170 :
1180 DEF PROCrun
1190 angle=1.57
1200 FOR N=1 TO 30
1210 PROCsum
1220 I=INKEY(200-5*N)
1230 PROCpointer(50+N*3+RND(20)-RND(20))
1240 NEXT N
1250 FOR N=50 TO -60 STEP-5
1260 PROCsum
1270 I=INKEY(RND(25))
1280 PROCpointer(50+N*2+RND(20)-RND(20))
1290 NEXT N
1300 ENDPROC

1310 :
1320 DEF PROCcrash
1330 FOR N=1 TO 200
1340 VDU19,0,(RND(15)),0,0,0
1350 VDU19,1,(RND(15)),0,0,0
1360 VDU19,2,(RND(15)),0,0,0
1370 VDU19,3,(RND(15)),0,0,0
1380 NEXT N
1390 VDU19,0,0,0,0,0
1400 VDU19,1,0,0,0,0
1410 VDU19,2,0,0,0,0
1420 VDU19,3,0,0,0,0
1430 SOUND1,-15,4,255
1440 *FX200,1
1450 *MOTOR1
1460 VDU4,14
1470 REPEAT
1480 FOR N=1 TO 35:PRINT:NEXT N
1490 UNTIL 0
1500 ENDPROC
1510 :
1520 DEF PROCsum
1530 a$=STR$(1+RND(9))
1540 b$=STR$(1+RND(9))
1550 PROCbezel(a$+" x "+b$+" = ")
1560 ENDPROC

```

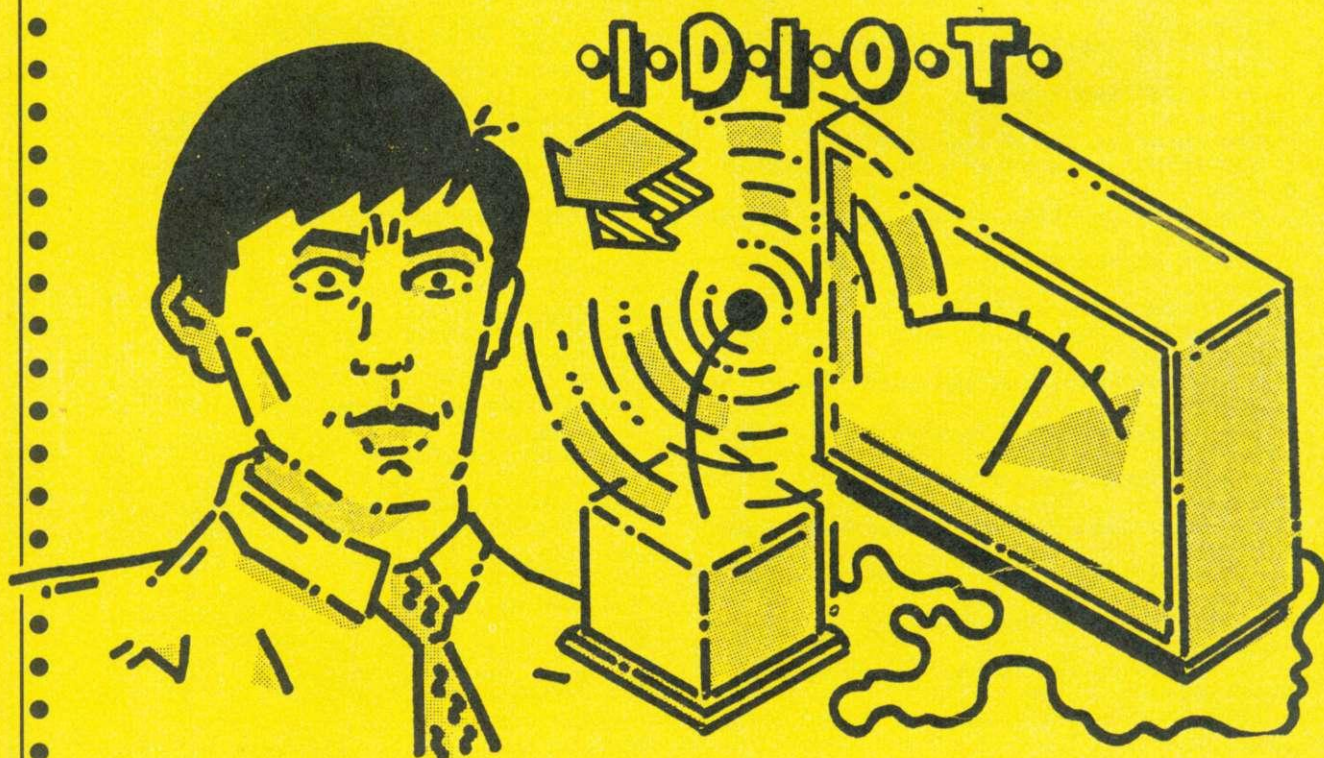

Tristram Mabbs' listing allows you to have high-resolution, multi-coloured graphics without losing too much memory

```

10 REM Colours by Interrupts
20 REM By Tristram Mabbs
30 REM for BBC Micro
40 REM (c) Acorn User April 1985
50 :
60 DIM DLI=50
70 Line_Val=&260
80 REM Set up demonstration
90 FOR A=0 TO 17 STEP 3
100 A'DLI=4*Line_Val
110 ?(A+DLI+2)=((A/3)AND7)+1)OR&10
120 NEXT A
130 A'DLI=TRUE
140 MODE 6
150 REM PROCsetdlis does the work
160 PROCsetdlis(DLI)
170 REM Insert "L." into input buffer
180 *FX138,0,76
190 *FX138,0,46
200 *FX138,0,13
210 END
220 :
10000 DEF PROCsetdlis(Data)
10010 A%:=135:Mode=((USR(&FFF4)AND&FF0000)/&10000)
10020 DIM Code FNassemble(0,&C000)
10030 A=FNassemble(0,Code)
10040 A=FNassemble(2,Code)
10050 A=?Data+&A8:?Data=A
10060 Data?1=((Data?1)+((A AND &F00)/&100)+6)
10070 CALL Vec_Setup
10080 ENDPROC
10085 :
10090 DEF FNassemble(Pass,Adr)
10100 P%:=Adr:LOPT Pass
10110 \ Change the IRQ1 vector
10120 .Vec_Setup SEI
10130 LDA&204:STA OldIrq:LDA&205:STA OldIrq+1
10140 LDA#NewIrq AND&FF:STA&204:LDA#NewIrq/256:STA&205
10150 CLI:RTS
10160 .OldIrq BRK:BRK
10170 \ New interrupt routine
10180 .NewIrq LDA&FC:PHA:TXA:PHA:TYA:PHA
10190 LDA&FE4D:AND&FE4E:AND&#20
10200 BNE DLI
10210 LDA&FE4D:AND&FE4E:AND&#2
10220 BNE FSI
10230 .Irq_Exit PLA:TAY:PLA:TAX:PLA:STA&FC:JMP(OldIrq)
10240 \ Interrupts identified
10250 .FSI LDA&FE4E:AND&#20:BEQ Irq_Exit
10260 LDA#0:STA ColCount
10270 \ DLI routine
10280 .DLI STA&FE4D
10290 LDX ColCount
10300 LDA Data+1,X:AND Data,X:CMPI&FF:BN
EP%+10:LDA#0:STAColCount:JMP Time
10310 LDA Data+2,X:AND&#F0
10320 LSRA:LSRA:LSRA:LSRA:TAY
10330 LDA Data+2,X:AND&#F:EDR#7
10340 J:ON Mode+1 GOSUB 10490,10570,10670,10490,10490,10570,10490:LOPT Pass
10350 \ Set the timer
10360 .Time LDA&FE4B:AND&#DF:STA&FE4B
10370 LDX ColCount
10380 LDA Data,X:STA&FE4B:INX:LDA Data,X:STA&FE49
10390 INX:INX:STX ColCount
10400 LDA&#A0:STA&FE4D:STA&FE4E
10410 JMP Irq_Exit
10420 \ Assorted data
10430 .ColCount BRK

```

```

10440 .Col2base EQU&B0:EQU&80
10450 .Col4base EQU&B0:EQU&20:EQU&80:ED
UB&A0
10460 .Col16base BRK
10470 \ The colour routines
10480 J:=P%-Adr
10490 REM 2 Colour
10500 LOPT Pass
10510 PHA:TYA:AND#1:TAY:PLA
10520 ORA Col2base,Y
10530 LDX#7
10540 .C2_loop STA&FE21:CLC:ADC#&10:DEX:
BPL C2_loop
10550 J
10560 RETURN
10570 REM 4 Colour
10580 LOPT Pass
10590 PHA:TYA:AND#3:TAY:PLA
10600 ORA Col4base,Y
10610 LDX#3
10620 STA&FE21:CLC:ADC#&10:STA&FE21
10630 CLC:ADC#&30:STA&FE21
10640 CLC:ADC#&10:STA&FE21
10650 J
10660 RETURN
10665 :
10670 REM 16 Colour
10680 LOPT Pass
10690 STA Col16base
10700 TYA:ASLA:ASLA:ASLA:ASLA
10710 ORA Col16base
10720 STA&FE21
10730 J
10740 RETURN
10745 :
10750 DEF PROCdlisoff
10760 ?&FE4E=&20:ENDPROC
10765 :
10770 DEF PROCdlison
10780 ?&FE4E=&A0:ENDPROC

```

101

HOW TO ENTER THE PROGRAM

The program can be broken down into three sections; the demonstration section (lines 10 to 150), the DLI core routine and utilities (lines 10000 to 10080 and 10750 to 10780) and the assembly section. To enter the program, first enter the following short routine:

```

10 Data=&4000
20 Data1=Data:Data2=Data
30 FOR Mode=0 TO 2
40 L=FNassemble(0,&4000)
50 L=FNassemble(2,&4000)
60 B=0
70 FOR A=&4000 TO &4000+L-1
80 B=B+?A
90 NEXT A
100 PRINT"Checksum is :";B
110 NEXT Mode
120 END

```

Save this as you will be able to use it with next month's program for mode changing. Then type AUTO 10090 and enter the assembly language section. If you now type RUN, three checksums, &4DB3, &524C and &4A59, should be printed. If so, you can now delete lines 10 to 120 and enter the remainder of the program. If not, or if an error occurs, check the listing and correct the error. Note that the REM statements at lines 10110, 10170, 10240, 10270, 10350, 10420 and 10470 are not essential and can be shortened or ignored. Lines 10490, 10570 and 10670 can be ignored if line 10340 is altered. With the entire program entered, save the program before running it in case an error still exists, as an error in the interrupt routine may corrupt the entire program.

Plotting equations on screen is easy using Nigel Jennings' *Graph* listing

```

10 REM Graph
20 REM by Nigel Jennings
30 REM For BBC and Electron
40 REM (c) Acorn User 1985
50 :
60 A$=STRING$(78," ")
70 B$=STRING$(78," ")
80 DIM Code$(11)
90 DIM Code%(8)
100 DIM Yvalues(201)
110 FOR I%=1 TO 11
120 READ Code$(I%)
130 NEXT
140 DATA "AO","SF","AX","AS","PL"
150 DATA "OP","SP","SD","RS","C","E"
160 MODE 7
170 PROC_HELP
180 MODE 0
190 PROC_INITIALISE
200 ON ERROR PROC_ERROR
210 :
220 REPEAT
230 PROC_INPUT
240 IF A$="H" MODE 7:PROC_HELP:MODE 0:P
ROC VDU:UNTIL FALSE
250 IF NOT Code%(6) CLG
260 PRINTTAB(0,31);"Y="A$;
270 IF Code%(3) PROC_AXES
280 PROC_PLOT((40-XA%)/60/SF,1)
290 IF Code%(8) PROC_DUMP
300 UNTIL FALSE
310 END
320 :
330 DEF PROC_INITIALISE
340 XA%=640 : YA%=528
350 PROC_VDU
360 SF=1
370 FOR I%=3 TO 8
380 IF I%<6 Code%(I%)=-1 ELSE Code%(I%)
=0
390 NEXT
400 PROC_DISPLAYCODE
410 ENDPROC
420 :
430 DEF PROC_VDU
440 VDU 29,XA%;YA%;
450 VDU 28,0,31,79,31
460 ENDPROC
470 :
480 DEF PROC_INPUT
490 REPEAT
500 CLS
510 INPUT TAB(0,31) "Y=" A$
520 I%=1
530 REPEAT
540 IF A$=Code$(I%) PROC_READCODE:PROC_
INPUT ELSE I%=I%+1
550 UNTIL I%>11
560 UNTIL A$<>" "
570 IF A$="H" ENDPROC
580 IF A$="RP" A$=B$ ELSE B$=A$
590 ENDPROC
600 :
610 DEF PROC_READCODE
620 IF I%>2 AND I%<9 Code%(I%)=NOT Code
%(I%):PROC_DISPLAYCODE
630 IF A$="AO" PROC_ORIGIN:PROC_DISPLAY
CODE:ENDPROC
640 IF A$="SF" PROC_SCAFAC:PROC_DISPLAY
CODE:ENDPROC
650 IF A$="RS" PROC_INITIALISE:ENDPROC
660 IF A$="C" PROC_DISPLAYCODE:ENDPROC
670 IF A$="E" PROC_END
680 ENDPROC
690 :
700 DEF PROC_DISPLAYCODE
710 PRINTTAB(0,31);"AO: ";XA%;", ";YA%;
720 PRINTTAB(17);"SF: ";SF;
730 FOR I%=3 TO 8
740 IF Code%(I%) PRINTTAB(I%*10-3);Code
$(I%);
750 NEXT
760 C$=INKEY$(500)
770 ENDPROC
780 :
790 DEF PROC_PLOT(S,I%)
800 IF Code%(5) P%=69 ELSE P%=5:X=S:Y=E
VAL(A$):PLOT 4,X*60*SF,Y*48*SF
810 FOR X=S TO (1240-XA%)/60/SF STEP .1
/SF
820 Y=EVAL(A$)
830 IF Code%(7) Y=Y+Yvalues(I%)
840 PLOT P%,X*60*SF,Y*48*SF
850 Yvalues(I%)=Y
860 I%=I%+1
870 NEXT
880 IF Code%(3) PROC_SCALE
890 ENDPROC
900 :
910 DEF PROC_AXES
920 MOVE 40-XA%,0
930 DRAW 1240-XA%,0
940 MOVE 0,48-YA%
950 DRAW 0,1008-YA%
960 ENDPROC
970 :
980 DEF PROC_SCALE
990 VDU 5
1000 @%=&02010A
1010 REM x-axis
1020 FOR XC%=40-XA% TO 1240-XA% STEP 120
1030 REM Graduations
1040 MOVE XC%,-10
1050 DRAW XC%,10
1060 REM Scale points
1070 MOVE XC%-120,-30
1080 IF Code%(4) PRINT XC%/60/SF
1090 NEXT
1100 REM y-axis
1110 FOR YC%=48-YA% TO 1008-YA% STEP 96
1120 REM Graduations
1130 MOVE -5,YC%
1140 DRAW 5,YC%
1150 REM Scale points
1160 MOVE -85,YC%+15
1170 IF Code%(4) AND YC%/48/SF<>0 PRINT
YC%/48/SF
1180 NEXT
1190 @%=&0A
1200 VDU 4

```

```

1210 ENDPROC
1220 :
1230 DEF PROC_ORIGIN
1240 REPEAT
1250 INPUT TAB(0,31) "Enter Origin: x-co
ord,y-coord : " XA%,YA%
1260 UNTIL XA%>=0 AND XA%<1280 AND YA%>=
0 AND YA%<1024
1270 XA%=60*((XA%-10)DIV 60)+40
1280 YA%=48*((YA%-28)DIV 48)+48
1290 VDU 29,XA%,YA%;
1300 ENDPROC
1310 :
1320 DEF PROC_SCAFAC
1330 REPEAT
1340 INPUT TAB(0,31) "Enter Scale Factor
: " SF
1350 UNTIL SF>0
1360 ENDPROC
1370 :
1380 DEF PROC_END
1390 VDU 26
1400 CLS
1410 END
1420 ENDPROC
1430 :
1440 DEF PROC_ERROR
1450 REM 17=Escape 18=Div by Zero 20=Too
Big 21=-ve Root 22=Log Range
1460 IF ERR=17 ENDPROC
1470 IF ERR=18 OR ERR=20 PROC_PLOT(X+.1/
SF,1%+1)
1480 IF (ERR=21 OR ERR=22) AND SGN(X)=-1
PROC_PLOT(.1/SF,100)
1490 ENDPROC
1500 :
1510 DEF PROC_HELP
1520 VDU 23,1,0;0;0;0;0;
1530 PRINT TAB(8);"OUTPUT CONTROL CODES
"
1540 PRINTTAB(11);"Print Control"
1550 PRINT "AO : Axis Origin";SPC(13);":
640,528"
1560 PRINT "SF : Scale Factor";SPC(12);":
: 1"
1570 PRINT "AX : Axes";SPC(20);": on"
1580 PRINT "AS : Axis Scales";SPC(13);":
on"
1590 PRINT "PL : Dotted Plot Line";SPC(8
);": on"
1600 PRINT "OP : Overprint";SPC(15);": o
ff"
1610 PRINT "SP : Superposition last plot
: off"
1620 PRINT "SD : Screen Dump";SPC(13);":
off"
1630 PRINTTAB(10);"Program Control"
1640 PRINT "RP : Repeat last plot"
1650 PRINT "RS : Reset codes to default"
1660 PRINT "H : Display this list"
1670 PRINT "C : Display current codes"
1680 PRINT "E : End program"
1690 C#=INKEY$(800)
1700 ENDPROC
1710 :
1720 DEF PROC_DUMP
1730 REM Insert Screen Dump Routine here
1740 ENDPROC

```

103



IF KEYING in all these listings gets you down and your fingers in a tangle why not send off for our monthly listings cassette? It contains all the major programs in this issue and costs £3.75 including postage and packing. You'll find the details about the cassette on page 95 and the order form on page 96.

Better still, be the envy of your friends and buy a bar-code reader (see our offer on page 113). All the listings in these yellow pages are reproduced in bar code format – send a cheque or postal order for £1.60 plus an A4 sized stamped addressed envelope to Bar Code Listings (April), Acorn User, 68 Long Acre, London WC2E 9JH.

Brian Lienard's Budge graphics editor lets you design icons for your micro

```

10 REM Budge
20 REM by Brian Lienard
30 REM For BBC and Electron
40 REM (C) Acorn User April 1985
50 :
60 *FX144,0,1
70 IF ?&FFFE=164 THEN EX=0 ELSE EX=96
80 MODE4:VDU19,0,4;0;
90 DIMvdu$(14),val%(14,8),mode$(3)
100 mode$(1)="ERASE";mode$(2)="DRAW "
110 mode$(3)="MOVE "
120 PROCsetchars
130 PROCtitle
140 PROCquestions
150 PROCdisplay(H%,W%)
160 LX=0:RX=W%*8-1:TX=0:DX=H%*8-1
170 MX=3:XY=0:YX=0
180 PROCcomlist
190 *FX4,1
200 :
210 REPEAT
220 PRINTTAB(X%,Y%);:Z%=GET AND &DF
230 IF Z%=139 AND Y%>TX THEN PROCup
240 IF Z%=138 AND Y%<DX THEN PROCdn
250 IF Z%=136 AND X%>LX THEN PROClt
260 IF Z%=137 AND X%<RX THEN PROCrt
270 IF Z%=68 THEN MX=2:PROCmode
280 IF Z%=69 THEN MX=1:PROCmode
290 IF Z%=77 THEN MX=3:PROCmode
300 IF Z%=86 THEN PROCsave:GX=0:PROCpr
cess:PROCcomlist:PROCrestore
310 IF Z%=76 THEN PROCload
320 UNTIL Z%=81 OR Z%=113
330 :
340 GX=1:PROCprocess
350 CLS:PRINT "Do you want to save ";
360 PRINT "VDU23 statements in a file";
370 PRINT " or print them on the";
380 PRINT " screen?"
390 PRINT "Press : F for file"
400 PRINTSPC(8);"S for screen";
410 REPEAT Z%=GET AND &DF
420 UNTIL Z%=70 OR Z%=83
430 IF Z%=70 THEN PROCfile : END
440 CLS:FORCX=0TO14:PRINTvdu$(CX):NEXT
450 PRINT "Now LOAD your program and CO
PY over"
460 PRINT "the statements to merge them
with it."
470 *FX4,0
480 END
490 :
500 DEF PROCfile
510 PRINT "Please enter File name :";
520 REPEAT:INPUT F$:UNTIL F$<>" "
530 F$=LEFT$(F$,7):CHAN=OPENOUT(F$)
540 FOR CX=0 TO W%*H%-1
550 FOR IX=1 TO LEN(vdu$(CX))
560 BPUT#CHAN,ASC(MID$(vdu$(CX),IX,1))
570 NEXT
580 BPUT#CHAN,13:NEXT:CLOSE#CHAN
590 PRINT "Now LOAD your program ";
600 PRINT "and *EXEC ";F$;" to"
610 PRINT " merge the VDU23 statements
with it"
620 *FX4,0
630 ENDPROC
640 :
650 DEFPROCprocess
660 PROCcls
670 PRINT TAB(15,27);"Processing";
680 FOR CX=0 TO W%*H%-1
690 PX=(CX MOD W%)*8-1
700 QX=(CX DIV W%)*8-1
710 IF GX=1 THEN vdu$(CX)=STR$(LI+CX*1
0)+"VDU23,"+STR$(UX+CX)
720 FORIX=1 TO 8:VX=128:SX=0
730 FORJX=1 TO 8
740 PRINTTAB(PX+JX,QX+IX);
750 AX=135
760 IF (USR(&FFF4)AND&FFFF)DIV &100=233
-E% THEN SX=SX+VX:IF GX=1 THEN PRINT"#";
770 VX=VX/2
780 NEXT JX
790 IF GX=1 THEN vdu$(CX)=vdu$(CX)+","
+STR$(SX) ELSE val%(CX,IX)=SX
800 NEXT IX
810 IF GX=1 THEN PRINTTAB(PX+1,QX+1);S
TR$(UX+CX);
820 NEXT CX
830 IF GX=0 THEN PROCview
840 PRINTTAB(8,27);"Press any key to c
ontinue";:Z%=GET
850 ENDPROC
860 :
870 DEFPROCmode
880 PRINTTAB(25,30);mode$(MX);
890 PROCupdate:ENDPROC
900 :
910 DEFPROCcls
920 FORYX=24 TO 31
930 PRINTTAB(0,YX);SPC(39);
940 NEXT:ENDPROC
950 :
960 DEFPROCsave
970 KX=XX:QX=YX:ENDPROC
980 :
990 DEFPROCrestore
1000 XX=KX:YX=QX
1010 PRINTTAB(X%,Y%);
1020 ENDPROC
1030 :
1040 DEFPROCsetchars
1050 VDU23,224,255,128,128,128,128,128,
128,129
1060 VDU23,225,255,1,1,1,1,1,1,129
1070 VDU23,226,129,128,128,128,128,128,
128,255
1080 VDU23,227,129,1,1,1,1,1,1,255
1090 VDU23,228,129,0,0,0,0,0,0,255
1100 VDU23,229,255,0,0,0,0,0,0,129
1110 VDU23,230,129,128,128,128,128,128,
128,129
1120 VDU23,231,129,1,1,1,1,1,1,129
1130 VDU23,232,129,0,0,0,0,0,0,129
1140 VDU23,233,255,255,255,255,255,255,
255,255
1150 VDU23,234,60,66,153,161,161,153,66
,60
1160 ENDPROC
1170 :
1180 DEF PROCdisplay(H%,W%)
1190 CLS:FOR BX=0 TO H%-1
1200 FOR AX=0 TO W%-1
1210 XX=AX*8:YX=BX*8:PROCtile(X%,Y%)
1220 NEXT:NEXT:ENDPROC
1230 :
1240 DEFPROCtile(X%,Y%)
1250 PRINTTAB(X%,Y%);CHR$(224);
1260 FOR IX=1 TO 6:PRINTCHR$(229);:NEXT
1270 PRINTCHR$(225)
1280 FOR JX=YX+1 TO YX+6
1290 PRINTTAB(X%,JX);CHR$(230);
1300 FOR IX=1 TO 6:PRINTCHR$(232);:NEXT
1310 PRINTCHR$(231);
1320 NEXT

```

```

1330 PRINTTAB(X%,Y%+7);CHR$(226);
1340 FOR I%=1 TO 6:PRINTCHR$(228);:NEXT
1350 PRINTCHR$(227);
1360 ENDPROC
1370 :
1380 DEFPROCcomlist
1390 PRINTTAB(0,24);"Mode: Press D=draw
,E=erase, M=move."
1400 PRINT"Move: Cursor keys = up,down,
left,right."
1410 PRINT"View: Press V to view at nor
mal size."
1420 PRINT"Load: Press L to load VDU23
statement."
1430 PRINT"Quit: Press Q to quit defini
tion."
1440 PRINTTAB(8,30);"Current mode is: "
;:COLOUR1:PRINTmode$(M%):COLOUR3
1450 ENDPROC
1460 :
1470 DEFPROCup
1480 Y%=Y%-1:PROCupdate:ENDPROC
1490 :
1500 DEFPROCdn
1510 Y%=Y%+1:PROCupdate:ENDPROC
1520 :
1530 DEFPROClt
1540 X%=X%-1:PROCupdate:ENDPROC
1550 :
1560 DEFPROCrt
1570 X%=X%+1:PROCupdate:ENDPROC
1580 :
1590 DEFPROCupdate
1600 PRINTTAB(X%,Y%);
1610 ON M% GOTO 1620,1630,1640
1620 PROCerase:GOTO 1640
1630 PRINTCHR$(233);
1640 ENDPROC
1650 :
1660 DEFPROCerase
1670 PRINTTAB(X%,Y%);
1680 A%=X% MOD 8:B%=Y% MOD 8:F%=0
1690 IF A%=0 AND B%=0 THEN PRINTCHR$(22
4);:F%=1
1700 IF A%=0 AND B%=7 THEN PRINTCHR$(22
6);:F%=1
1710 IF A%=7 AND B%=0 THEN PRINTCHR$(22
5);:F%=1
1720 IF A%=7 AND B%=7 THEN PRINTCHR$(22
7);:F%=1
1730 IF A%=0 AND B%>0 AND B%<7 THEN PRI
NTCHR$(230);:F%=1
1740 IF A%=7 AND B%>0 AND B%<7 THEN PRI
NTCHR$(231);:F%=1
1750 IF A%>0 AND A%<7 AND B%=0 THEN PRI
NTCHR$(229);:F%=1
1760 IF A%>0 AND A%<7 AND B%=7 THEN PRI
NTCHR$(228);:F%=1
1770 IF F%=0 THEN PRINTCHR$(232);
1780 ENDPROC
1790 :
1800 DEFPROCquestions
1810 PRINTTAB(0,15);"No. of chars. across
(1-5,default=1)";
1820 REPEAT INPUT W%
1830 UNTIL W%=0 OR W%<5
1840 IF W%=0 THEN W%=1
1850 PRINT"No. of chars. down (1-3,defa
ult=1)";
1860 INPUT H%:IF H%=0 THEN H%=1
1870 IF H%>3 THEN PRINT CHR$(7);:GOTO 1
860
1880 PRINT"ASCII codes for chars.to st
art at"

```

```

1890 PRINTSPC(12);"(224-";256-H%*W%";,d
efault=224)";
1900 INPUT U%:IF U%=0 THEN U%=224
1910 IF U%>256-H%*W% THEN PRINTCHR$(7);
:GOTO1900
1920 PRINT"1st line no. for VDU23 state
ments"
1930 PRINTSPC(11);"(1-32000,default=101
0)";
1940 INPUT LI:IF LI=0 THEN LI=1010
1950 IF LI<0 OR LI>32000 THEN PRINTCHR
$(7);:GOTO1940
1960 ENDPROC
1970 :
1980 DEFPROCtitle
1990 CLS
2000 PRINTTAB(5,2);"* BUDGE ";CHR$(234)
;" by Brian Lienard."
2010 PRINTTAB(5,4);"B BBC (& Electron
)"
2020 PRINTTAB(5,5);"U User-"
2030 PRINTTAB(5,6);"D Defined"
2040 PRINTTAB(5,7);"G Graphics"
2050 PRINTTAB(5,8);"E Editor."
2060 ENDPROC
2070 :
2080 DEFPROCview
2090 PRINTTAB(8,31);"Latest view is:--
---->";
2100 FOR C%=0 TO H%*W%-1
2110 VDU23,235,val%(C%,1),val%(C%,2),va
l%(C%,3),val%(C%,4),val%(C%,5),val%(C%,6
),val%(C%,7),val%(C%,8)
2120 PRINTTAB(C% MOD W%+33,C% DIV W%+32
-H%);CHR$(235);
2130 NEXT
2140 M%=3
2150 ENDPROC
2160 :
2170 DEFPROCload
2180 PROCsave:PROCcls
2190 PRINTTAB(0,25);"LOAD: Which tile a
cross(1-";W%"/1)";
2200 INPUT P%:IF P%=0 THEN P%=1:GOTO 22
20
2210 IF P%<1 OR P%>W% THEN PRINTTAB(31,
25);CHR$(7);SPC(4);:GOTO2190
2220 PRINTTAB(0,26);SPC(5);"Which tile
down (1-";H%"/1)";
2230 INPUT Q%:IF Q%=0 THEN Q%=1:GOTO225
0
2240 IF Q%>H% THEN PRINTTAB(31,26);CHR$
(7);SPC(4);:GOTO2220
2250 PROCtile((P%-1)*8,(Q%-1)*8)
2260 PRINTTAB(0,28);"Type in values fro
m VDU23 statement:"
2270 FOR I%=1 TO 8
2280 PRINTTAB(0,29);"Dot value for row
";
2290 COLOUR1:PRINT;I%:COLOUR3
2300 PRINT" (0-255/0)";:INPUTN%
2310 IF N%<0 OR N%>255 THEN PRINTTAB(30
,29);CHR$(7);SPC(5);:GOTO2280
2320 V%=128
2330 FOR J%=1 TO 8
2340 IF N% DIV V%=1 THEN PRINTTAB((P%-1
)*8+J%-1,(Q%-1)*8+I%-1);CHR$(233);:N%=N%
-V%
2350 V%=V%/2:NEXTJ%
2360 PRINTTAB(30,29);SPC(5):NEXT I%
2370 PROCcls: M%=3: PROCcomlist: PROCre
store
2380 ENDPROC

```

Program notes ►

BUDGE PROGRAM NOTES

In the following brief description of the parts of the program, the only deviousness occurs in lines 70 and 760. Line 70 finds out whether we are running under OS 0.1 or 1.0 and later, or the Electron. The value of O is set to either 0 or 96. Line 760 reads the ASCII code of the character at the current screen cursor position (I know there is an *FX call to do this but it isn't implemented in version 0.1 of the OS). The code given here works, but returns values differing by 96 for each OS, hence line 60.

Main Program Lines 60–610. Setting up is done in lines 60–190. The main 'set and do a command' loop runs from 210 to 320. Commands are recognised and executed in lines 230 (up), 240 (down), 250 (left), 260 (right), 270 (mode=draw), 280 (mode=erase), 290 (mode=move), 300 (view) and 310 (load). Line 320 traps all other keys as errors. The REPEAT...UNTIL loop is exited when the quit command is given. Lines 340–610 set up the VDU23 statements, ask whether they are to be displayed on the screen or sent to a file, do as requested and end the program.

PROCprocess Lines 650–850. Process tile display and construct the VDU23 statements. It is a triple nest of loops over each tile within the display, then rows within tiles, then dots within rows.

PROCmode Lines 870–890. Displays the new mode and updates the cell where the cursor is currently located.

PROCcls Lines 910–940. Clears the command summary area of the screen.

PROCsave Lines 960–970. Remembers where the cursor was when the display for View or Load commands is processed.

PROCrestore Lines 990–1020. Reverse of PROCsave.

PROCsetchars Lines 1040–1160. Set up the graphics characters needed to draw the tile display.

PROCdisplay Lines 1180–1220. Calls

PROCtile repeatedly to draw the display.

PROCtile Lines 1240–1360. Draws one character 'tile' on the screen.

PROCcomlist Lines 1380–1450. Prints command summary.

PROCup, PROCdn, PROClt & PROCrt Lines 1470–1570. Move the current cursor position (X%,Y%) in the appropriate direction and update the tile display accordingly.

PROCupdate Lines 1590–1640. Put the cursor in the right place and then, depending on the mode, draw a block, erase a block or do nothing.

PROCerase Lines 1660–1780. Erasing a block is easy – what you put in its place to restore the tile array is more difficult. All those IFs do the trick – work it out!



PROCquestions Lines 1800–1960. Asks all the questions that need answers before you can get started.

PROctitle Lines 1980–2060. Displays the program title.

PROCview Lines 2080–2150. After a call to PROCprocess this routine repeatedly sets up character no. 235 and puts it on the screen in the right place so you can see what your efforts look like actual size.

PROCload Lines 2170–2380. Implements the Load command. Asks which tile and then sets eight values and puts the block patterns they represent onto the screen.

Because the program is quite well structured it's relatively easy to extend. You can add a line in the main command loop to recognise a new command, mention it in PROCcomlist and a new procedure to do what you want. For example, I have implemented a slide command that lets you slide rectangular pieces of the tile display about. Another possibility is a command to read VDU23 statements into the display from an ASCII file you have prepared from an existing program.

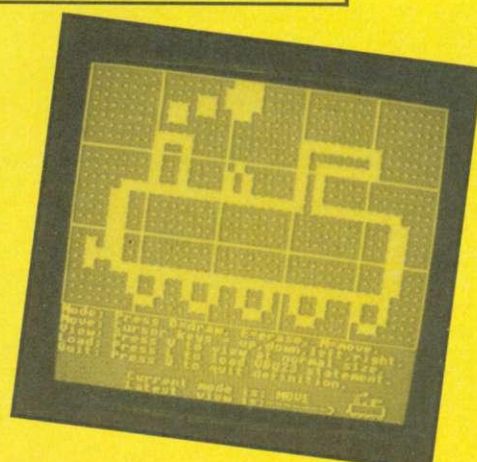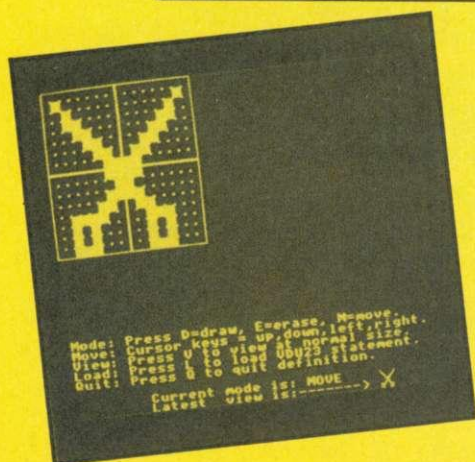

Listing 1. Chris Davies' program to trap the Break key using the ON ERROR sequence

```

10 REM Trap Break/Reset with ON ERROR
20 REM by Chris Davies
30 REM for BBC and Electron
40 REM (c) Acorn User April 1985
50 :
60 oldvec=&70
70 errvec=&202
80 osbyte=&FFF4
90 P%=&900
100 [
110 \ Restore error vector
120 \ to Basic's ON ERROR
130 LDA oldvec
140 STA errvec
150 LDA oldvec+1
160 STA errvec+1
170 \
180 \ initialise ROMs
190 LDA #143
200 LDX #1
210 LDY #&E
220 JSR osbyte
230 LDX #2
240 JSR osbyte
250 LDX #3
260 LDY #&FF
270 JSR osbyte
280 \
290 \ create error 100 (Break)
300 BRK
310 ]
320 $P%=CHR$(100)+"BREAK"+CHR$(0)
330 :
340 REM Point Break vector to
350 REM Machine code patch - JMP &900
360 *FX 247,76
370 *FX 248,0
380 *FX 249,9
390 count=1
400 :
410 ON ERROR PROCerror
420 :
430 REM Save Basic error vector
440 ?&70=?&202: ?&71=?&203
450 :
460 REPEAT
470 count=count+0.5
480 UNTIL FALSE
490 END
500 :
510 DEF PROCerror
520 REPORT:PRINT" at line ";ERL
530 :
540 REM Escape stops program
550 IF ERL=17 A%=247:X%=0:Y%=0:CALL os
byte:END
560 REM also removes patch - *FX247,0
570 IF ERL=100 PRINT"Press RETURN";:RE
PEAT UNTIL GET=13:PRINT
580 ENDPROC

```

Listing 2. Stewart Marshall's procedure to make the computer ignore redundant letters of the alphabet

```

10 REM PROC_search
20 REM by Stewart Marshall
30 REM For BBC and Electron
40 REM (c) Acorn User April 1985
50 :
60 MODE 6
70 CLS
80 PRINT TAB(3,4);STRING$(31,"*")
90 PRINT TAB(3,5);"*"TAB(33,5);"*"
100 PRINT TAB(3,6);"*"TAB(13,6);"PROC_
search"TAB(33,6);"*"
110 PRINT TAB(3,7);"*"TAB(33,7);"*"
120 PRINT TAB(3,8);STRING$(31,"*")
130 PRINT
140 PRINT "This procedure searches for
a specified"
150 PRINT "word or series of words in
the answer"
160 PRINT "inputted by the student. It
ignores any"
170 PRINT "extra words, spelling mista
kes and"
180 PRINT "typing errors that the stud
ent might"
190 PRINT "make."
200 PRINT
210 PRINT "What follows is a test-driv
e program."
220 PRINT TAB(0,22);"Press any key."
230 A$=GET$
240 CLS
250 REPEAT
260 PRINT TAB(0,5);"WORDS REQUIRED BY
TEACHER"
270 INPUT TAB(0,7) teacher$
280 PRINT TAB(0,10);"STUDENT'S ANSWER
TO BE CHECKED"
290 INPUT TAB(0,12) student$
300 PROC_search(student$,teacher$)
310 IF FD%=1 THEN PRINT TAB(0,15);"Tha
t's correct. Very good." ELSE PRINT TAB(
0,15);"Sorry, but that's not correct."
320 PRINT TAB(0,18);"TEST DRIVE AGAIN
(Y/N)"
330 again$=GET$
340 CLS
350 PROC_search(again$,"N")
360 UNTIL FD%=1
370 END
380 :
390 DEF PROC_search(reply$,answer$)
400 reply$=" "+reply$
410 IF reply$=" " THEN PRINT "You don'
t seem to have typed anything."
420 FD%=0:SPACE%=0:LK%=1:R%=0
430 REM Removing all but the bare
440 REM essentials from the answer$
450 VOWEL$="AEIOUYHaeiouyh"
460 an$=LEFT$(answer$,1)
470 FOR N=2 TO LEN(answer$)
480 X%=0
490 IF MID$(answer$,N-1,2)="SC" OR MID
$(answer$,N-1,2)="sc" THEN X%=1
500 IF MID$(answer$,N,1)=MID$(answer$,
N-1,1) THEN X%=1
510 FOR Y=1 TO LEN(VOWEL$)
520 IF MID$(answer$,N,1)=MID$(VOWEL$,Y
,1) THEN X%=1
530 NEXT Y
540 IF MID$(answer$,N-1,1)=" " THEN X%
=0
550 IF X%=0 THEN an$=an$+MID$(answer$,
N,1)
560 NEXT N
570 REM Checking the reply$
580 REPEAT
590 R%=R%+1
600 Aasc%=ASC(MID$(an$,LK%,1))
610 Rasc%=ASC(MID$(reply$,R%,1))
620 IF Aasc%=32 THEN SPACE%=LK%
630 IF Rasc%>96 THEN Rasc%=Rasc%-32
640 IF Aasc%>96 THEN Aasc%=Aasc%-32

```

Continued ►

See 'Testing Your Resistance', page 119

108

Listing 1. Paul Beverley's automatic resistance measurement program

```

10 REM Auto resistance measurement
15 REM By Paul Beverley
20 REM For BBC and Electron-Plus1
25 REM (c) Acorn User April 1985
30 :
40 MODE 7
50 PROCinitialise
60 REPEAT
70 PROCread_Rs
80 Rx=(65520/FNADC1-1)*Rs+.0005
90 PROCcalc_range
100 PROCprint_prompts
110 PROCdisplay_result
120 PROCchange_timing
130 UNTIL 0
140 END
150 :
160 DEF PROCinitialise
170 ON ERROR MODE 7:PROCerror:END
180 min%=400
190 ave%=2
200 places%=6
210 blank%=STRING$(18," ")
220 *FX16,4
230 VDU23,1,0;0;0;0;
240 *FX225,128
250 ENDPROC
260 :
270 DEF PROCread_Rs
280 Rs=1022.56
290 REPEAT UNTIL ADVALDIV256=4
300 IF ADVAL(4)<min% Rs=110.98
310 IF ADVAL(3)<min% Rs=11.0065
320 IF ADVAL(2)<min% Rs=1.0113
330 IF ADVAL(1)<min% Rs=1022.6
340 switch%=3-INT(LOG(Rs)/LOG(10))
350 ENDPROC
360 :
370 DEF FNADC1
380 *FX16,1
390 total%=0
400 FOR K%=1TOave%*50
410 IF ave%>4 IF K%MOD50=0 PRINT TAB(0
,23);ave%-K%DIV50;" ";
420 REPEAT UNTILADVALDIV256
430 total%=total%+ADVAL1
440 NEXT
450 *FX16,4
460 =total%/ave%/50
470 :
480 DEF PROCcalc_range
490 range%=4-LOG(Rx)/LOG(5)
500 IF range%>3 range%=3
510 ENDPROC
520 :
530 DEF PROCprint_prompts
540 D$=blank$
550 IF range%>0 D$="CLOSE SWITCH "+ST
R$(range%)
560 PROCdprint (0,0,D$)
570 D$=blank$
580 IF switch%>0 D$="SWITCH "+STR$(sw
itch%)+ " CLOSED"
590 PROCdprint (19,0,D$)
600 ENDPROC
610 :
620 DEF PROCdisplay_result
630 IF ave%>4 VDU7
640 R$=LEFT$(STR$(Rx),places%)+ " k ohm
s "
650 IF Rx>1000 R$=LEFT$(STR$(Rx/1000),
places%)+ " M ohms "
660 IF Rx<1 R$=LEFT$(STR$(Rx*1000),pla
ces%)+ " ohms "
670 PROCdprint(12,10,R$)
680 ENDPROC
690 :
700 DEF PROCdprint(X%,Y%,Z$)
710 PRINT TAB(X%,Y%) CHR$(141);Z$
720 PRINT TAB(X%,Y%+1) CHR$(141);Z$
730 ENDPROC
740 :
750 DEF PROCchange_timing
760 REPEAT
770 G%=INKEY(0)
780 IF G%=128 ave%=ave%*2
790 IF G%=129 ave%=ave%/2
800 IF ave%=0 ave%=1
810 UNTIL G%<0
820 PRINT TAB(0,23);SPC(4)
830 IF ave%>4 PRINT;ave%;" "; ELSE PRI
NT " ";
840 ENDPROC
850 :
860 DEF PROCerror
870 VDU23,1,1;0;0;0;
880 *FX225,1
890 REPORT
900 PRINT " at line ";ERL
910 ENDPROC

```

◀ Continued

```

650 IF Aasc%=67 THEN Aasc%=83
660 IF Rasc%=67 THEN Rasc%=83
670 IF Rasc%=Aasc% THEN PROC_found E
LSE PROC_notfound
680 UNTIL R%=LEN(reply$) OR FD%=1
690 ENDPROC
700 :
710 DEF PROC_notfound
720 IF Rasc%=32 THEN LK%=SPACE%+1
730 ENDPROC
740 :
750 DEF PROC_found
760 IF LK%=LEN(an$) THEN FD%=1 ELSE LK
%=LK%+1
770 ENDPROC

```

TOP OF THE LIST

Bob Tinley of Binley Woods, Coventry, supplies the first Top of the List for 1985. Bob's routine, which runs on both the BBC micro and Electron, allows you to have 40 characters per line in mode 2—twice as many as normal. It's possible to redefine part or all of the ASCII character set by hand using the VDU23 option, but this is very tedious.

Bob's program reads the standard 8*8 bit pattern and compresses it onto a 4*8 bit matrix. It then writes a character string at the position of the graphics cursor in the current foreground colour, but does not otherwise affect the screen background colour.

The program is written in assembler, but this should not stop anyone unfamiliar with programming in assembler entering it. When run, the machine code generated is stored above HIMEM, which is lowered slightly to allow for this. The machine code is then saved by the last line of the program. You can check that your assembler is correct by entering the following two lines after you have run the program:

```
17Z=0:FOR NZ=&2E00 TO &2F56:Z%=Z%+?NZ:NEXT
2PRINT "Checksum is : ";Z%:END
```

The correct code will produce the result:

"Checksum is : 41049"

Using the program is quite simple. First ensure that HIMEM has been set to &2E00 to protect subsequent loading of the machine code. Then load the machine code using *LOAD SLIM. Next reset the User Vector to point to the machine code:

```
U%=&200:U%?0=0:U%?1=&2E
```

The slim string can then be written at the position of the graphics cursor using *LINE. To print 'Acorn User' at the centre of the mode 2 screen use:

```
MODE 2:MOVE 640,512:*LINE Acorn User
```

Listing 2 is a demonstration program using this technique.

Listing 1. Bob Tinley's program allows you 40 characters per line in mode 2

```
10 REM Slim characters in Mode 2
20 REM by Bob Tinley
30 REM for BBC Micro and Electron
40 REM (c) Acorn User April 1985
50 :
60 HIMEM=&2E00
70 osword =&FFF1:oswrch =&FFEE
80 osnewl =&FFE7
90 string =&70 :char =&72
100 forecol=&7B :gline =&7C
110 mask =&7D :screen =&7E
120 top =&81 :pix =&83
130 flag =&84 :oldtop =&85
140 gcell =&D6 :userv =&200
150 glin =&31A :col =&359
160 flag =&84 :oldtop =&85
170
180 FOR pass=0 TO 3 STEP 3
190 P%=&2E00
200 IOPT pass
210 .line
220 CMP #1:BEQ slim
230 RTS
240 .slim
250 LDA #5:JSR oswrch
260 STX string:STY string+1
270 LDA #&19:JSR oswrch
280 LDA #0:LDY #5
290 .sli
300 JSR oswrch
310 DEY:BNE sli
320 JSR colour
330 LDA glin :STA gline
340 LDA gcell :STA oldtop
350 LDA gcell+1:STA oldtop+1
360 STA oldtop+1
370 LDY #0
380 .character
390 LDA (string),Y
400 CMP #&D :BEQ slimen
410 STA char
420 TYA:PHA
430 LDX #char:LDY #0
440 LDA #&A :JSR osword
450 JSR slimchar
460 LDX #1
470 LDA oldtop :STA top
480 LDA oldtop+1:STA top+1
490 LDY gline
500 .charline
510 TYA:CLC:ADC top
520 STA screen
530 LDA top+1
540 STA screen+1
550 TXA:PHA:TYA:PHA
560 JSR pair
570 PLA:TAY:PLA:TAX
580 CMP #8:BEQ nextcha
590 INX:INY
600 CPY #8:BNE charline
610 LDY #0
620 LDA top:CLC
630 ADC #&80:STA top
640 LDA top+1
650 ADC #&2:STA top+1
660 CMP #&80:BCC charline
670 SEC:SBC #&50
680 STA top+1:JMP charline
690 .slimen
700 JMP slimend
710 .nextcha
720 JMP nextchar
730 .pair
740 LDY #0
750 .pair1
760 LDA (screen),Y
770 ASL char,X
780 BCC pair2
```

Continued ►

◀ Continued

```

790 AND #&55
800 ORA forecol
810 .pair2
820 LSR forecol
830 ASL char,X
840 BCC pair3
850 AND #&AA
860 ORA forecol
870 .pair3
880 ASL forecol
890 STA (screen),Y
900 CPY #0:BNE pairend
910 LDY #8
920 JMP pair1
930 .pairend
940 RTS
950 .slimchar
960 LDX #8
970 LDA char
980 CMP #116:BEQ tf4
990 CMP #102:BEQ tf4
1000 CMP #52 :BEQ tf4
1010 CMP #74 :BEQ J
1020 .slim1
1030 LDA #0:STA pix
1040 LDA #&80:STA mask
1050 LDY #4
1060 .slim2
1070 TYA:PHA:LDY #2:CLC
1080 LDA #0:STA flag
1090 .slim3
1100 LSR mask
1110 LDA char,X
1120 AND #&FE
1130 BIT mask:BEQ slim4
1140 LDA #1:STA flag
1150 .slim4
1160 DEY:BNE slim3
1170 CLC
1180 LDA flag:BEQ slim5
1190 SEC
1200 .slim5
1210 ROL pix
1220 PLA:TAY
1230 DEY:BNE slim2
1240 LDY #4:LDA pix
1250 .slim6
1260 ASL A
1270 DEY:BNE slim6
1280 STA char,X
1290 DEX:BNE slim1
1300 RTS
1310 .tf4
1320 TXA:PHA:LDX #8
1330 .tf41
1340 LSR char,X
1350 DEX:BNE tf41
1360 PLA:TAX:JMP slim1
1370 .J
1380 TXA:PHA:LDX #6
1390 .J1
1400 LDA char,X:AND &FB
1410 STA char,X
1420 LDA char+1:ORA &7E
1430 STA char+1
1440 DEX:BNE J1
1450 PLA:TAX:JMP slim1
1460 .colour
1470 LDA col
1480 AND #&AA
1490 STA forecol
1500 RTS
1510 .nextchar
1520 LDA oldtop:CLC
1530 ADC #&10:STA oldtop
1540 LDA oldtop+1:ADC #0
1550 STA oldtop+1
1560 CMP #&80:BNE next1
1570 SEC:SBC #&50
1580 STA oldtop+1
1590 .next1
1600 PLA:TAY
1610 INY:JMP character
1620 .slimend
1630 JMP osnew1
1640 J
1650 NEXT pass
1660 *SAVE SLIM 2E00 2F57

```

Listing 2. Demonstration of slim characters

```

10 REM Slim characters test
20 REM by Bob Tinley
30 REM for BBC micro & Electron
40 REM (c) Acorn User April 1985
50 :
60 *LOAD SLIM
70 UX=&200:UX?0=0:UX?1=&2E
80 MODE2
90 VDU23;8202;0;0;0;
100 :
110 REPEAT
120 REPEAT B%=RND(8)-1:F%=RND(8)-1:UNT
ILB%<>F%
130 GCOL0,128+B%:CLG:GCOL0,F%
140 COLOUR 128+B%:COLOUR F%
150 MOVE0,900
160 *LINE QUICK BROWN FOX JUMPS OVER T
HE LAZY DOG.
170 MOVE0,700
180 *LINE quick brown fox jumps over t
he lazy dog.
190 MOVE480,500
200 *LINE 0123456789
210 MOVE160,300
220 *LINE !"#$%&'()*+,-./:;<=>?@[\\]^_
`{|}
230 VDU4:PRINTTAB(0,30);"ANY KEY to c
ontinue";
240 G%=GET
250 UNTIL FALSE

```

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15

30

BAR CODE OFFER

KEEP UP WITH THE KIDS IN SCHOOL



113

BAR CODES will revolutionise the way we use computers in applications as well as the way we load data. Here is the chance to get experience of this important development by ordering the Addison Wesley/MEP Bar Code Teaching Pack (see our January issue, page 129) direct through *Acorn User*.

These bar code readers are being offered to schools first and versions will not be available to the public in the shops until later in the year – when they will certainly cost more. However, because of its active involvement in the scheme *Acorn User* is able to offer the Teaching Packs direct to readers at the introductory price of £49.95 plus £2.95 post and packing (plus VAT).

Acorn User will be printing some listings in bar code format in each issue and making booklets of bar codes available by mail order. Book publishers are already printing listings in bar code format, in fact Bruce Smith's latest book *The BBC Micro Machine Code Portfolio* has 13 pages of bar code listings.

So, to stay ahead of the latest development in computers and education, send off for a pack from *Acorn User* today. See page 103 for offer of magazine listings in bar code format.

The pack includes:

- ★bar code reader
- ★explanatory booklet written by *Acorn User* author George Hill
- ★software to print bar codes
- ★music program by Joe Telford
- ★bar code stencil
- ★disc or cassette of utility software

Note to disc users: the disc supplied is 40 track – however, if you order the cassette, there are instructions on how to transfer the software to 40 or 80 track discs.

Please state disc or cassette version.

All for £60.84 including VAT and £2.95 postage, (£52.90 excluding VAT). Make your cheque payable to Redwood Publishing, fill in the form below and send it to Bar Code Offer, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

Please send me Bar Code Reader Teaching Packs* (£60.84 each inclusive)

*please tick for 40 track disc ☐ or cassette ☐

Name

Address

Post code

☐ I enclose a cheque/PO payable to Redwood Publishing for £.....

☐ Please debit my Access/Barclaycard/American Express

Account number


Signed

Credit card expiry date


Date

Send this form with your remittance to Bar Code Offer, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

**AND GIVING
YOU MORE.**

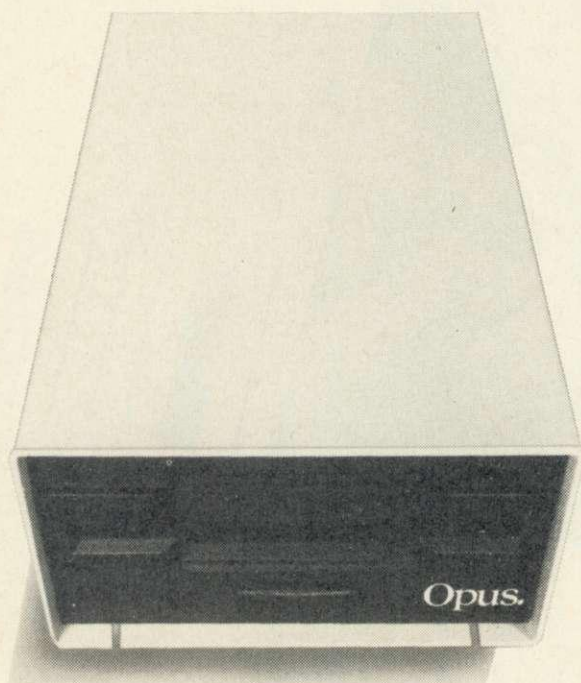


£199.95 (INC. VAT.)

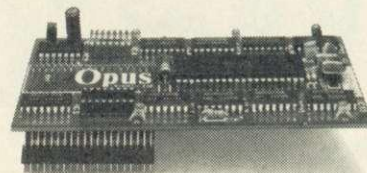

FREE.

PLEASE NOTE FROM 1ST APRIL OUR ADDRESS WILL BE: 55 ORMSIDE WAY, HOLMTHORPE INDUSTRIAL ESTATE, REDHILL, SURREY. TELEPHONE: REDHILL 65080.

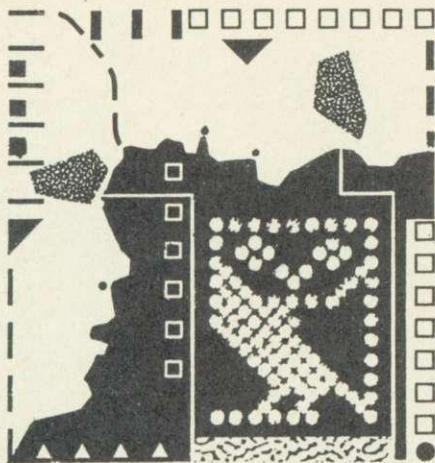

Your tips selected by Bruce Smith, including a way to trap the Break key and how to teach your machine to ignore your spelling mistakes

The Break

key trap

IT'S possible to trap the Break key by using Basic's ON ERROR sequence. Chris Davies of Hove shows you how...

The error vector must be copied to two spare locations immediately after the ON ERROR statement in a Basic program has been executed. Since there is a vector available (MOS 1.0+ only) to intercept the Break key (using OSBYTEs 247-249), this can be used to restore this error vector into Basic when Break is pressed (even with Control or Shift!) and then generate the error 'Break' to return control to the Basic interpreter via ON ERROR...

The advantage over the method of program trapping published in *Acorn User* (July 1984) is that no variables are

lost by putting OLD and RUN into the keyboard buffer. The only disadvantage I have found with my routine is that *COMPACT destroys a disc rather than compacting the programs on it! All other DFS operations work correctly (I've checked both the Acorn and Watford 1.30 DFS).

The example program (listing 1 on page 107) counts continuously using a floating-point number; normally this would be lost after Break/Reset. The routine can be disabled with *FX247. Programmers should, however, provide a way of exiting their program - without having to switch off the computer!

I see no reason why the routine should not work on the Electron, other than that lines 180-270 may have to be omitted. For tape users (Beeb & Electron) the origin of the code (currently &900) will have to be altered if the cassette system is going to be used (try DIM mc 60:P% = mc).

The top and bottom

of Forth stacks

FORTH addicts will no doubt be aware that the standard set in 1979 was superseded by a new one in 1983, which has many subtle differences. Peter Walker, an avid *Acorn User* reader from New Zealand, supplies some practical advice. The most important point is to clarify the status of the return stack throughout with the use of a suitable stack diagram. The following definition of INPUT illustrates the technique. Peter takes up the description...

To make things clear in Forth you have to write out the definitions in great detail - not compactly as the machine would happily accept. You must give a wealth of comment too, but the most important thing is to clarify the behaviour of the stack. (Sometimes the return stack - it holds loop counters - is used and it has to be shown too.) The stack is on the left from top to bottom, followed by words and comments.

Starting from the top then, you can see how each word takes a value or two from the stack, does something and puts a value or two back. INPUT works very like the Basic 'input', and is about as long a definition as one would wish to use. It demonstrates a great deal of Forth such as the use of QUERY, WORD and CONVERT - all difficult to follow from programs - as well as logic functions, a conditional loop, an IF-THEN branch and lots of stack movement.

The beginning is a little tricky. QUERY accepts a string of characters from the keyboard and tucks them away in a very temporary place called the 'terminal input buffer'. For safety during processing, WORD shifts them up to a 'specified delimiter', in this case BL for blank (20 hex), into another place

Help your micro understand you

PROCs away! Stewart Marshall from Sheffield sends a useful procedure that will be lapped up by those of you writing CAL programs. Stewart explains...

It is frustrating for students completing a computer assisted learning program to be told that they have given an incorrect answer when the only mistake they have made is a spelling or typographical error. My program (listing 2 on page 107) is a simple procedure designed to accept ordinary language input and avoid this situation.

When calling the procedure, the first parameter is supplied by the student's reply, and the second by the teacher/programmer as the word or group of words that he or she is looking for. The procedure then searches for the word or group of words in the student's reply. The search is deemed successful (by returning the value of FD% as 1) even if he or she has inserted extra characters or words; typed in upper and/or lower case; or made any of the more common spelling mistakes.

The procedure utilises an important feature of the English language,

namely that approximately 50 per cent of it is 'redundant'. Roughly speaking, this means that half of what we say or write is little more than padding. However, it is this that enables us to do crosswords, to understand spoken sentences even though we don't always hear every word, and, more generally, to complete many of the partial messages we receive daily.

For example, if you obliterate all the vowels in the previous sentence and then ask a friend to complete the sentence, I would expect him or her to be able to do it fairly quickly.

The procedure tells the computer to ignore the more redundant letters of the alphabet (most notably, the vowels) and so concentrate on those that uniquely specify the concepts we are looking for.

Beeb Forum is a platform for ideas, tips and applications relating to the BBC micro and the Electron, intended for experienced programmers to share their thoughts. For every reader's tip published we pay £5 - or more for something special. Contributions should be typed or printed, with substantial listings on cassette. WRITE TO Beeb Forum, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.



£60 WILL ORGANISE YOUR SYSTEM BEAUTIFULLY.

If you have a micro system which is beginning to roam all over the room, Opus can help you to get organised.

For only £59.95 you'll find our purpose built, beautiful teak finished Organiser Desk has plenty of storage space for a complete micro system.

The top shelf has sufficient room for both monitor and printer, while the large desk top area will accommodate your computer, disc drive or cassette recorder and software.

It has castors, making it fully mobile. And the assembled dimensions are H: 31" W: 40¼" D: 26"

Our price includes VAT and free delivery. And the desk comes with simple assembly instructions.

To get your system organised contact us on 01-701 8668 or by posting the coupon to: Opus Supplies Ltd., 158 Camberwell Road, London SE5 0EE. Opening Hours: 9.00 – 5.30pm, Monday – Friday. 9.00 – 1.00pm Saturdays.

To: Opus Supplies Ltd., 158 Camberwell Road, London SE5 0EE.

Please rush me the following:
(PRICES INCLUDE VAT AND CARRIAGE.)

_____ Organiser Desk(s) at £59.95 each (inc VAT)

I enclose a cheque for £ _____ or please debit my credit card account with the amount of £ _____
My Access/Barclaycard (please tick) no. is:

Name _____

Address _____

Telephone _____

Opus.
Opus Supplies Ltd.
AC12

The BEGIN, WHILE REPEAT loop tests a flag on the stack at WHILE and loops back from REPEAT to BEGIN if the flag is true. If it is not true, the WHILE-REPEAT code is skipped and there is no loop.

£5

no markers

MIKE McNAMARA, from my part of the world in north London, has provided an even easier method of removing markers in *Wordwise*. Mike says . . .

I agree with the solution provided by Martin Wax in February's Forum. However, I have been using the following method for the past two years:

*KEYO !0 !\$!#A !\$!#A

To remove the markers from anywhere in the text you press CTRL + SHIFT + f0 together. Hey presto, no markers! The text cursor is positioned at the place of the last marker.

£5

errors

HATE ERRORS? Perhaps you don't even like REMs? Well, Angus Rodger from Osbaston in Gwent might have come up with a cure . . .

When writing computer programs, I have found it very useful to be able to switch off the BBC micro's error handling. To do this, the user has to enter the following two instructions:

```

empty stack...      : INPUT      start definition
                    BEGIN          look below for WHILE and REPEAT
                    QUERY          text to terminal input buffer
                    BL             specified delimiter for WORD is a blank
20                  WORD          text to word buffer, starts with count byte
                    w             w is addr of count byte
                    w+1           DUP      step over count byte
                    w+1           C@      fetch first character
                    w+1           c       2D      is it a minus ?
                    w+1           c       2D      =
                    w+1           nf      DUP      negative flag
                    w+1           nf      >R      to Return Stack                      nf
                    w+1           nf      ABS     if neg, digits start one byte further
                    w+1           infl     +
                    ptr            0 0      ptr (pointer) = w+1 or w+2
                    ptr            0      ROT
                    0 0 ptr        CONVERT needs a dummy double number to fill and
                    n1 n2 addr     C@      returns the addr of next non-numeric ch
n1 n2                c            DUP      Now test this next character :
n1 n2                c            c       BL =    is it a space ?
n1 n2                c            bf      OVER     (blank-flag)
n1 n2                c bf c        2E =    is it a point ?
n1 n2                c bf .f       OR      (point-flag)
n1 n2                c            b.f      OVER
n1 n2                c b.f c        0=      is it a null? (EOL)
n1 n2                c b.f 0f      OR
n1 n2                c            b.0f     NOT      if none of these loop back from REPEAT

n1 n2                c            f       WHILE
n1 n2                c            R>      get neg-flag from Return stack
n1 n2                c            nf      2DROP 2DROP ." Not Valid"      clear all
                    REPEAT          back to the top BEGIN

n1 n2                c            R>      get neg-flag from Return stack
n1 n2                c            nf      IF      if the flag is True,
n1 n2                c            >R      put c out of the way
n1 n2                c            DNEGATE put a negative onto the double number
n1 n2                c            R>      get c back
n1 n2                c            2E -    If c is not a "." this result will be
n1 n2                diff          IF      non-zero, (true)
n1 n2                DROP          - upper byte (most significant)
n1 n2                or just n1      THEN
                    ;                end of definition.

```

Stack diagram showing the definition of INPUT which accepts single or double number values from the keyboard

*FX229,1 (Switch off Escape action)
?&202 = 165 (Change break vector)

This executes any valid instructions normally, but ignores anything which would generate an error message. I have found this very useful in writing programs as remarks can be entered into programs with no REM, eg,

PRINT5+5: This prints sum of five and five

will work correctly.

Finding OSHWM

across the Tube

KEITH MILLER of Leighton Buzzard provides some information and a useful function for those with second processors. Keith explains . . .

You may need to know the operating system high water mark (OSHW) in the I/O processor, for instance when saving the section of memory containing the definitions of ASCII codes 32-196.

The value of OSHWM varies depending on the filing system(s) fitted and if the second processor is not being used it will be simply the value of PAGE as set up by the operating system. How-

ever, with the second processor active, PAGE is set at &800, regardless of the filing systems fitted, and so a method is needed to find OSHWM across the Tube.

Both the User Guide and Advanced User Guide document OSBYTE call &83 (131) as a means of reading OSHWM, but when used in the second processor it merely returns the value of PAGE in the second processor (ie, &800). The Advanced User Guide also details OSBYTE &B4 (180), and says that it is equivalent to OSBYTE &83 as far as reading OSHWM is concerned, but this is not the case. With the second processor turned off the two calls indeed return the same result, but when used from within the second processor, OSBYTE &B4 returns the high byte of OSHWM in the I/O processor and this can then be used to save the definitions of ASCII codes 32–196 that lie in the &600 bytes below it, or as a pointer to free memory in the I/O processor. The following function returns the value of OSHWM:

```
1000 DEF FN__ioOSHW
1010 LOCAL A%,X%,Y%
1020 Y%=&FF:X%=0:A%=&B4
1030 =USR(&FFF4) AND &FF00
```

... Does anybody else have anything to pass on about the 6502 second processor?

MONITOR THE REDUCTION ON OUR HIGH RESOLUTION.



CALL
01-701 8668
FOR
GENEROUS
EDUCATION
DISCOUNTS.

We've reduced the price of our RGB high resolution colour monitor (580 x 470 pixels) to only £199.95 – that means you save £50 on our previous offer – and that includes VAT, leads and carriage.

And just because you're saving on price doesn't mean you're sacrificing quality. Here's what Acorn User had to say about our monitors.

“..Gave steadier pictures than the Microvitec Cub, and the colours were rather better.

It seems that all ‘normal’ and ‘medium’ resolution monitors, including the Sanyo, are simply inadequate to deal with the Beeb's graphics and text output.

The JVC was excellent, giving clear, legible results.

Was the JVC better than the Microvitec?*
Would I buy one? Yes to both questions.”

The unit has a 14" screen and is suitable for the BBC Micro, Electron, Sinclair QL, Lynx, Oric, Apple, IBM, Amstrad and RML 480Z and most other leading micros.

And there's a two year full guarantee—a year longer than any other company offers.

If you order your monitor by post, you'll receive it within 48 hours by courier service.

Simply post the coupon below to: Opus Supplies Ltd., 158 Camberwell Road, London SE5 0EE. Or by telephoning 01-701 8668 quoting your credit card number. Or, of course, you can buy at our showroom between 9.00–5.30 pm, Monday–Friday.

*Microvitec Cub 14" Monitor

To: Opus Supplies Ltd., 158 Camberwell Road, London SE5 0EE.

Please send me: _____ High Resolution Colour Monitor(s) at £199.95 (inc. VAT)

I enclose a cheque for £ _____ Or please debit my credit card account with the amount of £ _____ My Access/Barclaycard (please tick) no. is _____

Please state the name of your computer. _____

Name _____

Address _____

Postcode _____

Telephone _____

Opus.
Opus Supplies Ltd.

AC13

MODEL REFERENCE	1302-2 High Resolution
RESOLUTION	580x470 Pixels
C.R.T.	14"
SUPPLY	220/240v. 50/60Hz.
E.H.T.	Minimum 19.5kv Maximum 22.5kv
VIDEO BAND WIDTH	10MHz.
DISPLAY	80 characters by 25 lines
SLOT PITCH	0.41mm
INPUT: VIDEO	R.G.B. Analogue/TTL Input
SYNC	Separate Sync on R.G.B. Positive or Negative
EXTERNAL CONTROLS	On/off switch and brightness control

PLEASE NOTE FROM 1ST APRIL OUR ADDRESS WILL BE: 55 ORMSIDE WAY, HOLMTHORPE INDUSTRIAL ESTATE, REDHILL, SURREY. TELEPHONE: REDHILL 65080.



Having explored the Beeb's analogue port, Paul Beverley now examines how you can use the ADC for a variety of electrical measurements

TESTING • YOUR RESISTANCE

119

YOU CAN use the ADC (analogue to digital converter) inputs to measure various electrical quantities – voltage (ac and dc), resistance, capacitance and inductance. Measuring current is not easy, but for most applications, if you are able to measure voltage and resistance, you can calculate the current. I'm going to start with the simplest of all to measure – resistance. I'm also going to look at how we can use the same set-up to provide a way of testing transistors and diodes to see if they are working. It will only provide a 'go/no-go' test, but that is still useful and is simple to set up.

Measuring resistance – the basic principle

The basic principle of operation is to compare the unknown resistance (R_x) with a standard resistor (R_s) of known value. This is done by putting the two resistors in a 'potential divider' circuit (figure 1). The reference voltage which is used for the ADC chip is applied to the top of the divider chain, and the voltage at the middle is measured by applying it to one of the ADC inputs.

You can then work out the value of R_x by using the ratio of the voltages across the two resistors. If you read the ADVAL number (A), this gives a value which represents the voltage across R_s . Since the total voltage, V_{ref} , is represented by the number 65520, the voltage across R_x will be equivalent to $(65520 - A)$. Thus, using simple proportions, we can write:

$$\frac{R_x}{R_s} = \frac{(65520 - A)}{A} = \frac{65520}{A} - 1$$

Thus we can write $R_x = R_s \cdot (65520 /$

$A - 1)$. The only problem with this technique is that, for best accuracy, R_s and R_x should be about the same size. To measure a whole range of different values of resistance we need to have various standard resistances available.

There are limits to the values we can use, however. At the lower end we have to be careful not to draw too much current from the voltage reference source, and at the other end, if R_s is too large, we get problems with noise and the effect of the impedance of the ADC input, which is approximately 10 megohms. As a compromise, I suggest using four standard values: 1k, 10k, 100k and 1M.

So how do you implement this? One way is to have the four resistors on a rotary switch, and select whichever is most appropriate for the resistor under test. You then have to indicate to the program which standard resistor is being used so it can make the appropriate calculation. This can be done either by an appropriate key press each time you change ranges, or by having a second set of switch contacts (ie use a two pole, four way switch) and set up a divider chain on ADC channel two so that the computer itself can sense the switch position and automatically change the value of R_s .

An alternative method, and the one I have used (figure 2), is to put all four standard resistors in series with the unknown resistor and then use simple switches to short out one or more of them when the unknown one is too small to be compared with the higher value resistors. This method was chosen as it was the cheapest solution,

needing only three push-button switches rather than the more expensive rotary switch. However, the software has been written in a structured way so that if you prefer to use the rotary method, all you need do is to rewrite the 'read_ R_s ' procedure which detects which buttons are pressed. If you want to use the system to get really high accuracy readings you'll need to use longer averaging times, in which case it might be better to use toggle switches rather than push switches in order to avoid getting a sore thumb, but this would increase the cost again.

Operating the program

You operate the program (listing 1) as follows. When you first run it with an unknown resistor in place (R_x) the value of the resistor is calculated from the simple potential divider formed by R_x and the combination of R_1 to R_4 . If the component under test has a high enough resistance value then you will get a fairly accurate reading just from

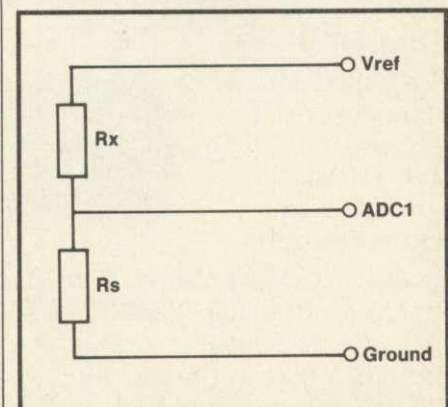


Figure 1. Simple potential divider circuit

the first test. If R_x is below about 120k the program prompts you to press button one. This shorts out R_1 leaving the other three resistors to form the potential divider with R_x .

The computer knows you are pressing button one because ADC channel four will give a very low value and so it automatically changes the value of R_s in the calculation. If the resistance is below 25k you are prompted to press button two, and if it's below 5k to press button three. To some extent it does not matter which button you press because the computer always knows which one is pressed and does the calculations accordingly, but for optimum accuracy you should press the button as prompted.

The program uses averaging to improve the accuracy, but at the extremes of the range you will need to use longer averaging times to get the highest precision. Function keys f0 and f1 are programmed to double and halve, respectively, the averaging times. When you first run the program you get one reading each second. Pressing f0 once will double this to two

seconds, twice to four seconds and so on. If you use sufficient averaging, say eight or 16 seconds you can even get a good indication of the value of resistance less than 10 ohms. If the averaging time is four seconds or more, a prompt is given at the bottom of the screen to show how the timing of the measurement is proceeding. It counts down in half seconds towards zero.

Setting up and using the system

The precision of the system depends not only on the accuracy of the ADC, but also of the resistance used. There is little point in buying expensive close tolerance resistors, though, as the impedance of the ADC itself will change the effective value of the standard resistance, especially with the 1 megohm resistor. It is best to buy high stability resistors (five per cent tolerance will do) and then, if possible, borrow some close tolerance resistors to calibrate the system. For the highest accuracy it should be calibrated on one particular computer as there is a certain amount of variation of the input

impedance of the different ADC chips. The calibration is done by adjusting the values of R_s in lines 280 to 330 of the program. The values given in the listing are the theoretical values of 1k, 11k, 111k and 1111k. The easiest way to do the calibration is to choose an accurately known resistor in each of the four ranges, eg 1 megohm, 100 kilohms, 10 kilohms and 1 kilohm. Start with the 1 megohm and see what value it reads. You then calculate the new value of R_s as:

$$\text{New value of } R_s = 1111 \times \frac{\text{Actual value of } R_x}{\text{Measured value of } R_x}$$

This value can then be entered into lines 280 and 330. If you've got it right, the program should give exactly 1.0000 megohms. You may require a longer averaging time to do an accurate check. You then press button one and use a 100k standard resistor, adjusting line 300, then button two with a 10k resistor, adjusting line 310 and finally a 1k resistor with button three pressed, adjusting the value of R_s in line 320.

With the prototype I found that over

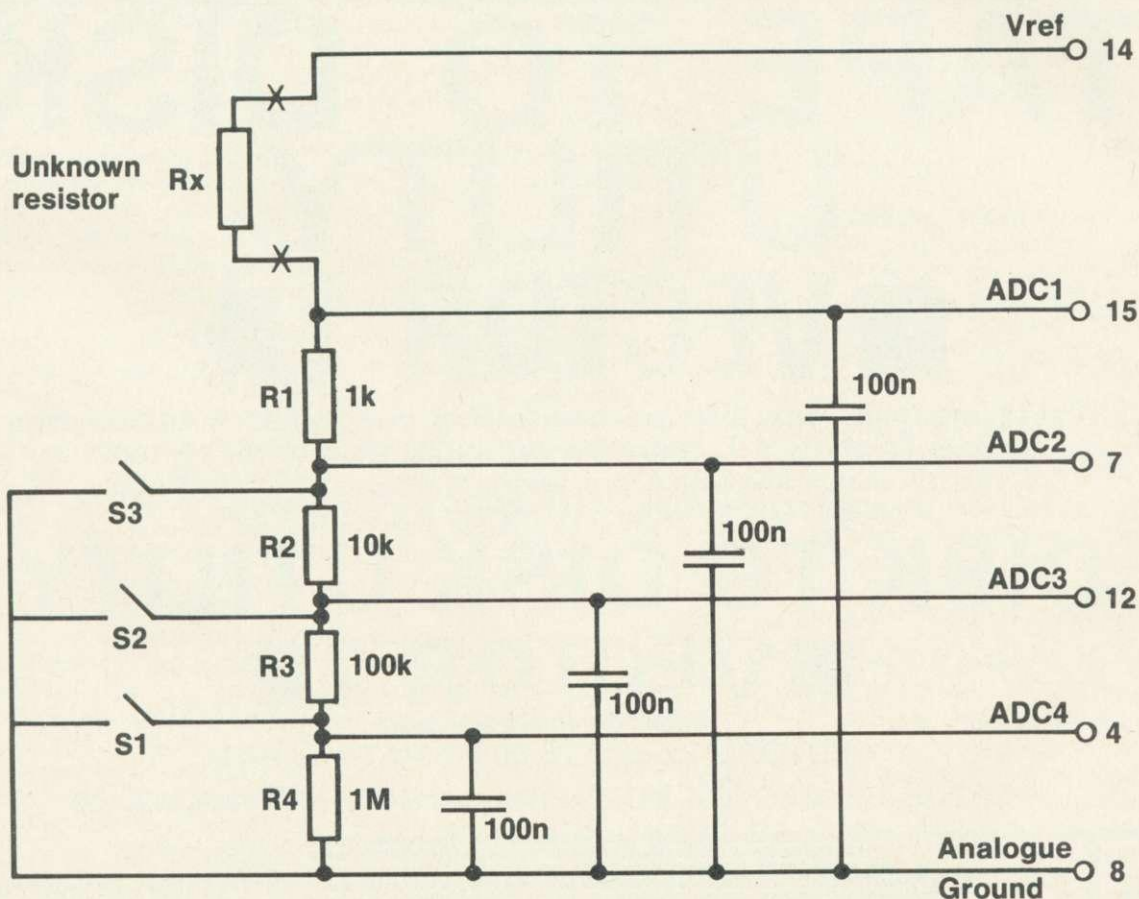


Figure 2. Hardware for semi-automatic resistance measurement

TURN YOUR BBC COMPUTER INTO A REAL TIME IMAGE PROCESSOR WITH THE IMAGE III FRAME STORE



IMAGE III is a high resolution Frame Store which can capture and display pictures in real time from any 625/525 line video source. Once captured in the 512×512 frame memory, the computer can access the stored image for processing or manipulation. The store utilises 6 bit A/D and D/A converters to give up to 64 grey levels per pixel. A major feature of this store is that if a lower resolution picture is selected then the store can be partitioned to store multiple pictures, eg for 256×256 resolution, four pictures can be stored. This allows the computer to compare two or more pictures captured from the same or different video sources.

The IMAGE III Frame Store turns your BBC computer into a low cost image processing system and opens up a range of possibilities such as Robotic Vision, Medical Imaging, Factory Inspection etc. Alternatively the store can be used in applications where picture data is arriving slowly, eg weather satellite transmissions, ultrasonic imaging, enabling the user to have a steady display without the need for long persistence display devices.

IMAGE III plugs directly into the 1MHz bus on the BBC micro, and is supplied with a comprehensive software package which demonstrates the features of the store.

Price: £1,990 plus VAT

IMAGE III is also available for the IBM PC and Apple computers.

ELTIME LTD

Unit D29, Maldon Industrial Estate, Fullbridge
Maldon, Essex CM9 7LP

Tel: 0621 59500

The TV Picture Store Board used in IMAGE III was developed by British Telecom Research Laboratories and is manufactured under licence by Eltime Ltd.

FLAT BED PRINTER/PLOTTER



£399

(save £300 on R.R.P.)
includes software for BBC.
Routines include axis, circle,
spiral, polygon hatching
scale etc.

Please ring 095 389 592 for details.

BIZZEL COMPUTERS

Walnut Tree House, Forncett St. Peter, Norwich NR16 1AR.

Send S.A.E. for our Educational Software List.

RUBYCRETE COMPUTER SYSTEMS

Software for Education, Science & Medicine

BSTAT Vol. 1 & 2

These powerful, menu-driven programs provide essential Statistical routines for parametric and non-parametric data. The disc-based programs are written to exacting standards for Scientific applications. Full data correction is available and data transformation on both axes is standard. They are supplied with a comprehensive User Manual.

- | | |
|--|------------------------------|
| ★ Mean & Standard deviations | ★ Minimum and Maximum values |
| ★ Linear regression | ★ Mann Whitney test |
| ★ Wilcoxon pairs test | ★ Kruskal Wallis Analysis |
| ★ Analysis of Variance | ★ Chi-square test |
| ★ Area under curve | ★ Spearman Rank correlation |
| ★ Paired and unpaired t-tests | ★ Life survivorship tables |
| ★ Random data generation for testing | |
| ★ Data can be stored and retrieved from disc | |
| ★ Graph plots option to dump to EPSON printers | |

Special discounts available to Education Authorities.

OFFICIAL ORDERS AND ENQUIRIES FROM COLLEGES AND SCHOOLS WELCOME

BBC 32K £67.95 per Volume inc. VAT, post and packing
(£125 both volumes). Specify 40 or 80T discs.


Rubycrte Ltd, PO Box 2, Kibworth, Leicester LE8 0SL
(Tel: 053753 2473 24 hours).

TAPE TO DISK UTILITY VECTOR 1

- ★ A systems Disk – only ONE needed for ALL your tapes. ★ 40/80 Format.
 - ★ User Friendly ★ Transfers more tapes than other systems.
- Currently compatible with Acorn, Watford, Single Density DFS's only.
VECTOR 1 Price: £16.00 inc VAT and P&P

DISK TO DISK UTILITY VECTOR 2

Backs up all known disks
VECTOR 2 Price: £16.00 inc VAT and P&P
VECTOR 1 + VECTOR 2 ORDERED TOGETHER Price: £30.00

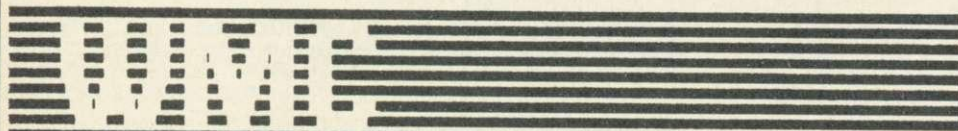

WILTSHIRE MICRO CENTRE

Available from:
WMC Unit 6, Central Trading
Estate, Signal Way, Swindon,
Wilts.
0793-612299.

the range 1k to 1 megohm, the measured resistance value was never in error more than 0.3 per cent, and over the range 100 ohms to 10 megohms, it was never worse than two per cent. Below 100 ohms the accuracy decreased, but when a fiddle factor of 0.5 ohms was added (ie +0.0005 at line 80) it appeared to be within two per cent right down to 5 ohms. However, at both extremes of the range, longer averaging times were needed to get a steady enough value.

In case you've not used a resistance meter before, it is important to realise that they are only intended to be used on individual components and not on components within a circuit. If you want to use the system for in-circuit component testing, you must take account of the effect of all the other components in the surrounding circuit, and you should certainly *never* use it on a circuit which is connected to its power supply. Doing so could damage the computer. It is possible to include components which protect the ADC input against over-voltage, but this would make the circuit unnecessarily complicated.

Testing diodes and transistors

Although you cannot talk about the 'resistance' of a diode or a transistor, the resistance measuring system can be used to check whether or not a diode or transistor is functioning properly. The diode can be put in place of the unknown resistor and button three pressed. When it is one way round it should give a high resistance reading (cathode nearest to the Vref connection), while if it is the opposite way its apparent resistance should be substantially lower (roughly 500 to 700 ohms).

For testing NPN transistors you connect the collector and emitter leads to the resistor testing contacts, with the collector at the end nearest Vref. With nothing touching the base, the resistance should be high. If you lick your fingers and hold the collector with one hand and the base with the other, the resistance should drop substantially. For PNP transistors, the same test can be used except that the emitter should be connected nearer to Vref, but again you should make contact with your fingers to the base and the collector. As with the diode tests, this should be done with button three pressed. If you

are going to do a number of these tests, it might be better to have a toggle switch instead of this button.

Fully automatic resistance measurement

If you undertake so much resistance checking that you think it worthwhile to have fully automatic operation, you will need to use three relays in place of the push button switches. Reed relays operating off the +5 volt supply would be quite adequate, but you need to control them with lines from either the Printer Port or the User Port. You must also use a transistor driver circuit on each line as the output current from the

ports is insufficient even to switch reed relays.

Continuity testing

Any resistance measuring system can be used as a continuity tester, and this is no exception. However, since we are using a programmable system we can easily add features such as sound output so you don't need to look up from the circuit under test. All you have to do is add:

```
675 IF Rx < 10000 THEN VDU7
```

You may also want to change the program to reduce the averaging time in order to get a faster response.

Detailed program analysis

For those who might want to amend the program for their own applications, here is a detailed analysis.

The main body of the program is an initialisation procedure followed by a repeat loop which consists of choosing the value of Rs according to which buttons are pressed (line 70), calculating the resistance value (line 80), working out which range of values this is in (line 90), printing prompts on the screen about which button to press and which button is actually pressed (line 100), displaying the result (line 110) and then changing the averaging time if requested (line 120). This forms an endless loop and the only way out is to press Escape, and then the system is restored to normal.

PROCinitialise (lines 160–250) sets up the error routine (line 170), initialises various variables (lines 180–210), selects all four ADC channels (line 220) ready for the 'read_Rs' procedure, switches off the cursor (line 230), and makes the function keys produce ASCII codes 128 and upwards (line 240).

PROCread_Rs (lines 270–350) adjusts the value of Rs in response to which ADC channels are giving a low reading. Line 290 waits for channel four to convert before starting to read the ADVAL values, and line 330 has to be included since, if no resistor is present, all four channels will be giving a low reading, even when no buttons are pressed. Setting Rs back to the maximum value avoids an erroneous 'button pressed' message being printed on the screen. The number of the button pressed is worked out at line 340 by using the LOG function to find in which decade the current value of Rs comes.

FNADC1 (lines 370–460) switches to one ADC channel to improve the speed of measurement (line 380) and then

reads and averages the ADVAL values for a length of time governed by the variable *avetime%*, which is the time in half seconds. The purpose of line 410 is to print out a countdown of the time, but it is only used if the averaging time is more than two seconds.

PROCcalc_range (lines 480–510) takes the calculated value of Rx and works out which button it would be best to press.

PROCprint_prompts (lines 530–600) prints on the screen in double height characters the message as to which button should be pressed and which button actually is.

PROCdisplay_result (lines 620–680) first of all gives a bleep to signal the end of the averaging process (line 630), though it only does this for averaging times above two seconds. The value of Rx is turned into a string, and printed out in kilohms, though if it is less than 1 kilohm it is converted into ohms, and if it is greater than or equal to 1 megohm it is changed into megohms.

PROCdprint (X%,Y%,Z\$) (lines 700–730) simply prints out a string in double height characters starting at a particular screen co-ordinate, and is called by some of the other procedures.

PROCchange_timing (lines 750–840) picks up as many presses of keys f0 or f1 as have occurred during the last measurement and doubles or halves the averaging time accordingly. Lines 820 and 830 print out the new averaging time at the bottom of the screen so that the user can see what averaging period has been selected.

PROCerror (lines 860–910) restores the normal cursor and the normal use of the function keys as well as reporting any errors.

You'll find Paul Beverley's automatic resistance measurement program on yellow page 99.

CHASE DATA NEW PRODUCT LAUNCH

SPECIFICALLY
ENHANCED FOR USE
WITH THE
BBC MICRO.



Canon 221A "Super-Slim"
(33.5mm) 80 track double
sided 400K floppy disc drive
(40/80 track switching).

Continuing our policy of securing premium
quality products at budget prices we are
pleased to announce the new generation
Canon 221A drive.

Specifications:
80 track double sided disc drive. 40/80
track switching with dual colour LED.
Capacity 400K in single density, operates in
double density. Direct drive, track to track
access 3 ms in 96 TPI mode. Dimensions:-
1/3 standard height, only 33.5mm.

£154 INC.

All canon 40/80 switchable disc drives feature an
on-board dual-colour LED on the front panel to
show track mode selected.

This is coupled with our
own unique two-stage
illumination. To give a
clear operating status,
as follows.

40 TRACK MODE:	LED GREEN
80 TRACK MODE:	LED RED
POWER ON:	HALF-ILLUMINATION (GREEN OR RED)
DRIVE SELECTED:	FULL-ILLUMINATION (GREEN OR RED)

SPECIAL OFFER

WHILE STOCKS LAST

Specifications:
40 track double sided disc drive
capacity 200k in single density
Operates in double density
Track to track access time - 6 ms
Full 12 month warranty with optional
extended warranty available



£95 INC.

**CANON 210 2/3 HEIGHT (57.5 mm)
40 TRACK D/SIDED 200K
FLOPPY DISC DRIVE
DIRECT DRIVE**

Price Includes:
Drive cased with cables,
manual & utilities disc and
includes VAT, postage &
packing.

FUJI FLOPPY DISCS

	Per box 10	If purchased with disc drive
40 TK SS DD	£17.60	£15.60
40 TK DS DD	£24.50	£22.50
80 TK DS DD	£28.60	£26.60

These prices include VAT & P & P.



DISCUS

Test utility for testing your own disc drive, at regular intervals to avoid the dreaded flop of your floppy. Menu driven, easy to use, 40 or 80 track versions.

Tests: Motor speed, read/write, steptest, alignment test*, step & read/write test, read only test.


£8.00 inc. £7.00 if purchased with disc drive.

This test requires and oscilloscope & alignment disc.



SLIM CANON DISC DRIVES:

MODEL: 110. SPECIFICATION OF EACH DRIVE: S/SIDED 40 TRACK 100K.
MODEL: 210. SPECIFICATION OF EACH DRIVE: D/SIDED 40 TRACK 200K. MODEL: 220. D/SIDED 80 TRACK 400K. (40/80 TRACK SWITCHING)

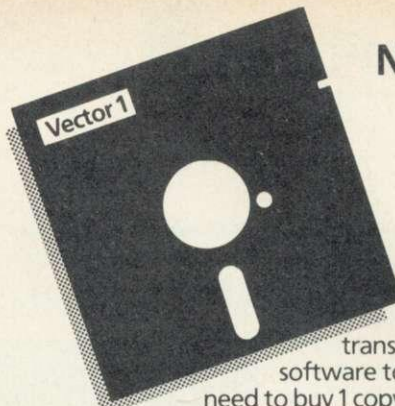

NEW SOFTWARE RELEASE FROM CHASE DATA

Vector 1 -

The ultimate tape to disk utility

Vector 1 allows you to transfer almost all your tape software to disk. Unlike others, you only need to buy 1 copy of Vector 1 since it transfers tapes to specially formatted program discs. This is easily the most powerful tape to disk utility available.

Vector 2 -

Disk to disk utility


Vector 2 allows you to make backup copies of all your valuable disk software. It is the most advanced utility of its kind available. It is a condition of sale that neither of these products are used for infringement of copyright. Not compatible with double density interface.

Vector 1 £16 On its own

£15 If purchased with disk drive

Vector 2 £16 On its own

£15 If purchased with disk drive



SLIM SANYO DISC DRIVES:
MODEL: 596D. SPECIFICATION OF EACH DRIVE: D/SIDED 40/80 TRACK 400K. (40/80 TRACK SWITCHING)

The Sanyo disc drive is a "half-height" 40/80 track switchable unit of standard dimensions, built to Sanyo's usual high standards of quality and reliability.

Inclusive price list: This means: disc drive + case + all power & data cables + UK carriage + utilities disc & manual + VAT.

	CANON					SANYO
Model	110	£108	210	220	221A	596D
Formatted Capacity per drive on BBC Micro:	100K	200K	200K	400K	400K	400K
Single Drive & Case:	£85	£75	£95	£149	£154	£149
Single Drive & Case PSU:	£110	-	£120	£174	£179	£174
Dual Drive & Case:	£174	-	£191	£279	£289	£279
Dual Drive & Case/PSU:	£204	-	£226	£309	£319	£309

DON'T FORGET YOUR VECTOR 1 & 2 WHEN ORDERING.

Support:

Warranty: All disc drives sold by Chase Data Ltd come with a full one-year warranty on parts & labour with optional extended warranty on all drives.

Extended Warranty
Your Insurance of trouble free operation
When ordering your disc drive, ask about our second and third year extended warranty scheme. This covers ALL PARTS AND LABOUR and costs from as little as £15.00 on single drives and £23.00 on dual drives.

Non-Warranty Service: As the experts in our field, we can offer service on most makes of floppy disc drive.

Recalibration & Alignment... £25 per unit inc. VAT (parts extra).

Phone for details: (Tel: 0784-38487).


Payment:  

By Post: Send your remittance (cheques only please) with your order to:

CHASE DATA

Unit 2, Crabtree Road, Thorpe Industrial Estate, Egham, Surrey, TW20 8RN.

By Phone: (Tel: 0784-38487). Allow up to 21 days for delivery.

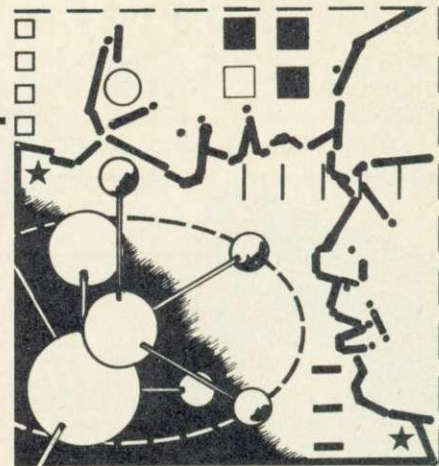

The pages full of Atomic reactions! This month, your host Mike Barwise explains printer connections and examines the failings of toolkits

126

HERE we are at the threshold of a new financial year. Software sales trends are ever upwards, and with the introduction of a modicum of standardisation (*Acorn User*, February), which is a pleasant change from the designed-in incompatibility of the recent past, it looks as if this year will see more people using more micros in more homes than ever before.

The eight-bit connection



HERE'S an interesting query: how do you connect an eight-bit only printer to the Atom and avoid printing nothing but chunky graphics? It's a question I received from Walter Watson of Stirlingshire and have often heard asked. His printer is a Sony Plotter, but several of the lower cost printers available are eight-bit only as this is BBC micro standard.

Assuming the printer has a Centronics interface, the eighth data bit (bit eight if the lowest bit is numbered one, or bit seven if the lowest bit is numbered zero) must normally be at logic low to print alphanumerics, and high to print chunky graphics. This eighth bit is connected to pin nine of the printer socket, but is left unconnected at the Atom printer plug. An unconnected logic input normally goes high by default, so just plugging in an eight-bit printer will put it permanently in chunky graphics mode.

The solution, assuming you only want to print text and are prepared to do without chunky graphics altogether, is to write this data line low, and this can be accomplished in two ways.

The simple but almost irrevocable method is to link the inner and outer pins in position nine on the Atom printer plug at the PCB with a fine soldered-in wire (figure 1).

The safer way is to make the connection at one or other end of a special printer lead. If you are using flat cable, you can split out one of the wires (as shown) with a fine modelling knife, and realign it before assembling the *Atom* end connector (figure 2).

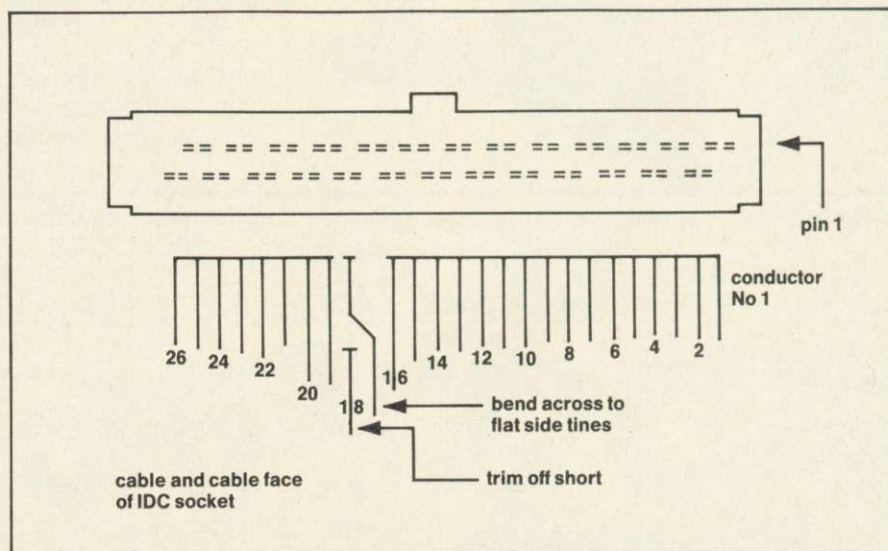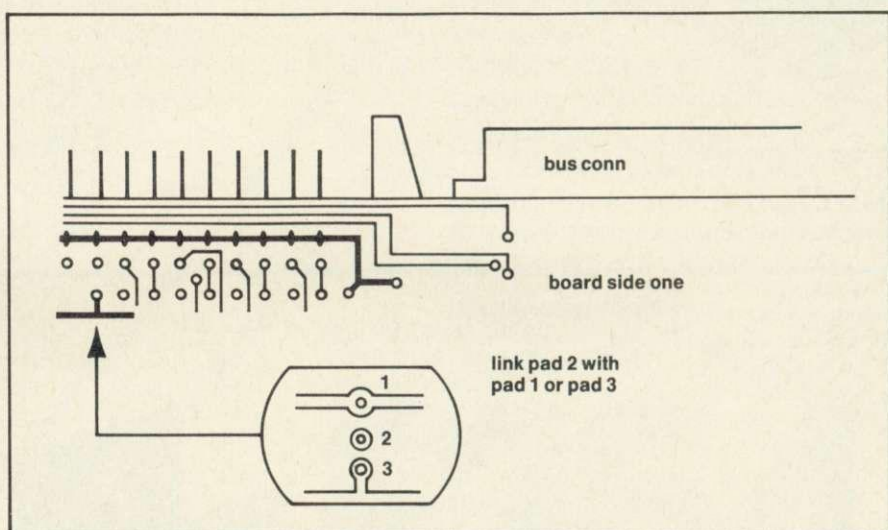

Using an eight-bit Centronics: top, figure 1, cheap but permanent solution; bottom, figure 2, the cable answer

When the software writers break the rules

IS IT possible to LINK to and de-LINK from various toolbox ROMs from within Basic, asks R J Parsons of Middlesex. The answer is 'probably not'.

To appreciate the answer to this question properly, you have to understand the process of LINKing into ROMs. The command LINK takes the hex parameter you give it, and treats it as an address to which it performs a


machine code JUMP. In passing, the command also loads the accumulator, X and Y registers of the CPU with the values found in the least significant bytes of the variables A, X, Y, but this is largely irrelevant to ROM LINKing.

The significance of the LINK to a ROM, therefore, depends entirely on the machine code routine the CPU finds at the address you LINK to. The com-

mand is only a means of getting there. Unfortunately, there is no standard adhered to by the writers of the extant utilities and toolkits, so without examination of the code at the target address, no assumptions can safely be made about the result of the operation. However, certain generalisations can be made to cover the incompatibility of different extension ROMs.

The LINK command usually changes the Atom OS vectors so that they point to loops of code in the ROM to change the performance of input and output routines, thus modifying keyboard input, screen output, etc. Each ROM will, of course, have its own set of vector changes pointing to its own routines, which will be in the wrong places for other ROMs. The most usual change is the use of the COMVEC to call extra commands. This is a really horrid approach, as it renders the system totally unusable with disc or similar serious expansion. It can be readily identified by the star prefix on the new commands.

Most utility ROMs use Page Zero fairly liberally and randomly, for tasks as simple as storing interim values from arithmetic and logical operations;

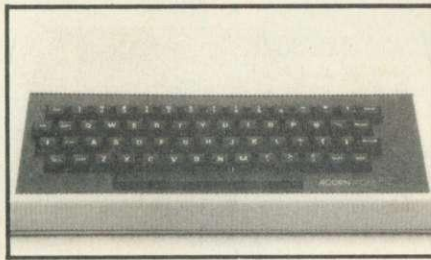

as flag locations for tests; and in some cases even for volatile code blocks. As there are only some 100 or so user bytes in Page Zero anyway, and there is no consistency about allocation, various ROMs will probably use the same location for different purposes, creating conflicts.

Unless you are prepared to provide your own vector reset routine, either in machine code or by laboriously POKE-ing all the values into the vector table at Page 02, the only way to restore the default vectors is via the reset routine

at &FF3F, which also stops your Basic cold!

The ideal toolkit would have at least the following features. An EXIT command which restores all vectors and locations used to their original values before returning you to Basic. Use of Page Zero restricted to the absolutely essential (eg, STA(IND),Y), temporary byte storage being located elsewhere. A command interpreter obeying the Atom OS protocol for A000 ROMs, ie, 40BF in A000, A001 followed by the first instruction of the code. You would then not need the LINK command anyway.


Unfortunately, none of the utilities I have seen incorporate all these features, and only one has the last. Although the answer to Mr Parsons' question is unfortunately 'probably not', it's not the poor Atom's fault, but that of independent software writers who did not stick to the rules laid down by the Atom's designers.

Invented a routine or discovered a hardware modification for the Atom? Here's a chance to show your originality and win some cash. Send your idea to: Atom Forum, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

Draw with the BBC micro and show the true potential of your machine

Fill shapes in one of 23 colours (Mode I)
Draw points, lines, rectangles ellipses and circles
Smooth curves
Wire frame diagrams
Hidden line removal
Draw in perspective
Measure scaled distances
Ekta sketch lines, Half tone facility
Mirror images
Repeat images, SS, enlarged, reduced, stretched
Actual colour displayed
Store up to 10 ellipses or circles in memory
Redraw any one of these at cursor position
Change any actual colour for one of 8 others
Clear screen, load screen, save screen
Print characters or numbers at any pixel point
Error messages for incorrect input
Fully comprehensive manual

35¢ 496 • □ •••

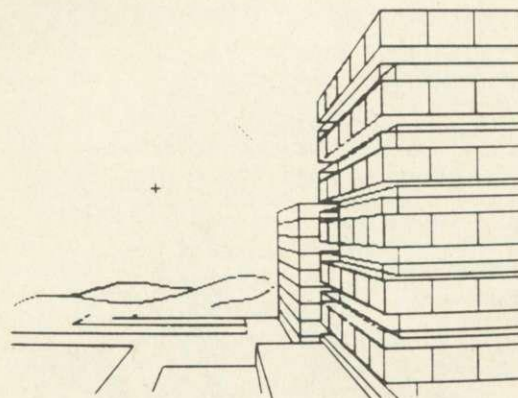

This programme has been purpose designed by professional Graphic Designers for simplicity and ease of use, and is undoubtedly the most versatile drawing programme on the market at this time. There is no need to input any numerical data, as all judgements are made visually. The BBC Micro is the finest drawing machine in its price range. Find out what it can do.

The A. B. Designs drawing programme costs only £36 for over 70 functions (model B). New AB2 Program, available on disc (price £61) and cassette (price £51). When ordering send Cheque/PO and VAT at 15%. Please include phone no. with all correspondence. For further information send SAE and phone no. to A. B. Designs, 81 Sutton Common Road, Sutton, Surrey. 01.644 6643 (closed all day Thursday).

**NOW
AVAILABLE**

**A LOW COST DISC BASED
PROFESSIONAL
ACCOUNTING PROGRAM
For The BBC Computer**

"Micro-Trader"

INTEGRATED SALES PURCHASE AND NOMINAL LEDGERS

Designed for business use by a business man. "Micro-Trader" is a fully integrated program in which all Sales and Purchase Ledger Transactions are automatically updated to the Nominal Ledger.

"Micro-Trader" offers full Sales and Purchase Ledger facilities including SALES INVOICE and STATEMENT PRINTING with a capacity of 450 accounts and 3000 transactions per month in each Ledger.

Normal Income, Expenditure, Assets, Liabilities & Journal Posting in the Nominal Ledger with full Reporting for individual accounts, Audit Trail, Trial Balance, Profit & Loss and Balance Sheet.

"Micro-Trader" is certified by Customs and Excise for V.A.T. extraction.

A V.A.T. Return produced in 2 minutes!!!!

STOCK CONTROL and MAILMERGE programs can be added



PHONE TODAY FOR A FREE FACT SHEET

MEADOW COMPUTERS

HEBREWS MEADOW, LOWER EVINGAR ROAD, WHITCHURCH, HANTS.

Telephone: Whitchurch (025682) 2008



diamondsoft

A better way of computing

Simple
Single Disc
Operation

No
2nd Processor
Required

Purchase

Cashbook

£27.50

+ VAT
per module

Nominal

Sales

Business Software of the BBC microcomputer

The **complete** disc based package:

- Sales / Purchase / Nominal Ledgers
- Cashbook • VAT Accounting
- Full double entry system
- Trial Balance • Age Analyses
- Built in Database subsystem
- Fully supported

Requires the Control Module to operate which includes documentation, system and data discs on either 40 or 80 track and Database system.

Send for full details to:-

Diamondsoft Ltd., FREEPOST,

Cheadle Hulme, Cheshire SK8 5YB Tel: 061-485 8705



BRIDGE?

CONTRACT BRIDGE PLAYER?

... THEN YOU NEED ...

BRIDGE-MENTOR

... AN IDEAL BRIDGE PARTNER ...

*** PERFECT YOUR CARDPLAY ***

*** IMPROVE YOUR BIDDING ***

*** ARCHIVE INTERESTING HANDS ***

*** CREATE/ANALYSE RANDOM DEALS ***

With high resolution colour-graphics and sound of your micro, "Bridge-Mentor" guides you through expertly analysed hands. A host of features including the spectacular "Autoplay" option.

Ideal for individual practice, analysis and archiving.

Superb teaching aid for clubs and professionals.

Create an infinite archive of hands that can be brought to life on the screen.

Compile special teaching material.

£9.50 inc.

Cheques to:- * All cassette only.

DEPT: AU1

MINIC BUSINESS SERVICES,
12 WOBURN CLOSE, BUSHEY,
HERTFORDSHIRE. WD2 3XA.

BBC (32K) AND
ELECTRON



FREE INTERFACE

WITH EVERY 'brother' TYPEWRITER
MODELS CE51,60,70,EM80,100,200
PURCHASED

AVAILABLE TO BBC,B USERS ONLY

THIS UNIQUE INTERFACE, INCORPORATING ITS OWN VIEW DRIVER, WILL ENABLE YOU TO USE THE BROTHER TYPEWRITERS AS LETTER QUALITY PRINTERS. ITS EASY TO INSTALL AND COMES COMPLETE WITH FULL DOCUMENTATION.

**COMPARE THIS PRICE FOR A
LETTER QUALITY PRINTER**


CE51 **£299** + VAT.
OR

PURCHASE THE INTERFACE ONLY FOR £75 INCL. VAT
BARCLAY - ACCESS AND CREDIT FACILITIES AVAILABLE

SEND SAE FOR FURTHER DETAILS

ABACUS BUSINESS MACHINES LTD,
961 CHRISTCHURCH ROAD, BOURNEMOUTH.
DORSET. BH7 6AZ. TEL (0202) 423204

TRADE ENQUIRIES WELCOME

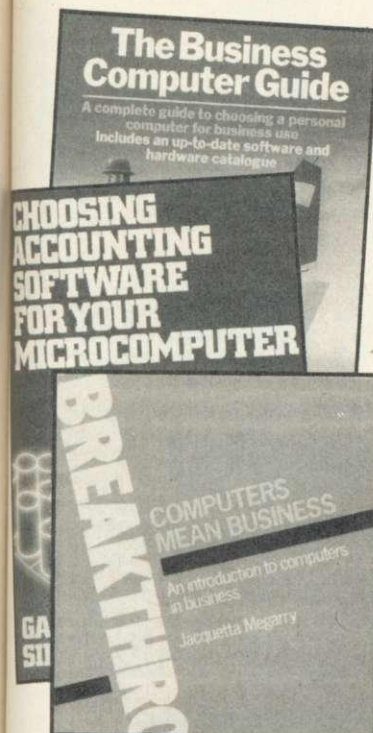

Trio of books for newcomers

THREE books to help newcomers to the business side of computers will, if the blurb on the covers is to be believed, solve all your problems.

In the first, *The Business Computer Guide* from Sunshine, Horenstein and Tarlin will lead you 'step-by-step through the maze of hardware and software' for £8.95. Gary Simon in *Choosing Accounting Software for your Micro-computer* from Collins, will explain 'which accounting package is best for you' for £7.95.

The third, *Computers mean Business* from Pan will 'show how computers can increase profitability and efficiency' for £2.95. Here, your guide is Jacquetta Megarry.

Both Sunshine and Collins have a gimmick: for one it's an up-to-date software and hardware catalogue, and the other a rapid checker to help decide the best money-handling package.

Megarry's book is linked to the National Extension College's home study courses and designed to cover several educational syllabuses.

All three take CP/M as the standard system, and although one was written using a BBC micro, you'll be lucky to find any mention of BBC packages. In fact, the up-to-date guide doesn't even list Acorn, but then it was written by Americans with sections re-worked for the UK version.

Business computers miss release dates

ACORN looks likely to revise its range of business computers in light of the recent deal with Olivetti. However, statements from the various parts of the company are confused.

Alex Reid was unavailable to talk to *Acorn User*, and even the head of the business section was unable to comment. Statements about specific products were impossible to get as the whole company was in a 'melting pot' with even Olivetti not expanding on its original financial statements.

Acorn's plans (announced in a Press release in early February) to have the machines in 50 stores by the time this magazine came out



ABC with Winchester

have obviously been shelved. Customer services could not give the address of any

dealer stocking the machines as we went to press. However, Acorn's London office said the Personal Assistant and the 300 series were still planned to be on display at the end of March.

Olivetti's strength is in business computers and it will obviously have its own opinions on the ABCs. The ABC300 machines are as advanced as anything on the market with IBM compatibility and running the latest GEM operating system.

All the computers can be upgraded to ABC310 level (except the Terminal), and prices were released in January from £800 and £4000. The 32016 (ABC200) version running Unix and targeted at universities has not been released, in fact the second processor is not yet available for the BBC.

For details phone Acorn customer services on (0223) 210111.

Micro	Chip	Software included	Disc	£ + VAT
Terminal	8-bit	Terminal emulators	—	799
PA	8-bit	View, Viewsheet	twin	999
ABC100	8-bit	CP/M, Plan series	twin	1,599
ABC110		as 100 but with Winchester hard disc		2,999
ABC300	16-bit	PC-DOS, MS-DOS, CP/M86	twin	2,599
ABC310		as 300 but with Winchester and GEM		3,999

Four additions to database line-up

MORE databases have appeared since our round-up and comparison in the December issue. Four new ones cover the BBC and Electron, with versions on disc, cassette and EPROM.

Sigma produces versions of its *Psifile* for the BBC on disc or cassette, and the Electron on cassette. The packaging does warn buyers to check they have the right version, but it doesn't say anywhere whether it's 40 or 80 track (our version booted up on a 40-track drive). It costs £19.95.

Discdata from Watford is available in either format and costs £19.55. It stresses ease of use and a menu system, and includes the ability to perform calculations on numeric fields.

Fileaid is next on the list from Lincoln Microsystems. For £35 you get an EPROM and

disc of utilities. Yet again, however, the disc format was not mentioned on the packaging, although the adverts do check which version you want.

Another offering from Watford is *File Plus* on EPROM at £49.45.

This also comes with a utilities disc, and boasts its own command language for searching. Statistics can be manipulated with the arithmetic operators provided.

Revision

Finally, an almost-new database. The *Starbase* EPROM from GCC (reviewed last July) has been upgraded and renamed: it's now called *Star-database*. The final revision is the price — £86.25, which includes a 40/80-track disc full of software.

Disc software for mailing and payroll

MAIL Merge enables wordprocessor users to add a disc-full of names and addresses to standard letters produced on either *Wordwise* or *Scribe* Merlin products.

The 40-track disc costs £19.95, and either 350 or 700 names can be stored on a 'merge' disc, depending on format.

Another product from CYB is *Payroll* for firms with 150 or 600 employees, again depending on disc format. National insurance, tax and fixed deductions are all calculated as well as a coin and note analysis. The disc costs £49.95.

CYB encourages correspondence and prints a contact telephone number for each system. Details from CYB at 8 Briar Ave, Norbury, London SW16 3AA.

PRO-SOFT

'OFFICE MANAGER'

An entirely new RANGE OF SOFTWARE written especially for the SMALL BUSINESS using a BBC.B COMPUTER, it is based on MODULES which can be used INDEPENDENTLY or INTEGRATED into a full system. The MODULES are, briefly:

1. CUSTOMER/SUPPLIER DATABASE: Name, Address, Phone & Contact Fields with ALPHABETIC SORT & FULL PRINTOUT or NAME/ADD. only for MAILING.

2. SALES LEDGER: INDEXED ENTRY of each CUSTOMER, showing CURRENT BALANCE and full HISTORY of A/C. Prints STATEMENTS with DEBT AGEING. Process, Reconcile, Store & List PAYMENT RECEIVED. Lists SALES.

3. PURCHASE LEDGER: Records CASH/CREDIT PURCHASES. Displays items for PAYMENT and recent PAYMENTS to SUPPLIER. Lists all PURCHASES.

4. V.A.T. RETURNS: Prints all SALES and PURCHASES within USER SPECIFIED PERIOD, ANALYSES EXPENDITURE into USER DEFINED CATEGORIES (Graphics Option available). Prints copy of COMPLETED V.A.T. RETURN.

5. APPLICATIONS PACK: SPECIALISED INPUT ROUTINES create TRANSACTION DATABASE from which appropriately formatted INVOICES & CREDIT NOTES can be produced at any time. The system caters for 2 V.A.T. RATES or NO V.A.T. and will support SEVERAL APPLICATIONS ON LINE at one time.


APPLICATION PACKS AVAILABLE NOW: ROAD HAULAGE, SERVICE COs, GENERAL SALES and PLANT & EQUIPMENT HIRE (which includes automatic HIRE UPDATE and COST calculations). Others packs are being prepared but if YOU have a specific requirement please enquire, we may be able to help.

The MODULES are available on either 40/80 SS/DS Discs from £25.00 + V.A.T. and are supplied complete with FULL DOCUMENTATION, CONFIGURATION ROUTINE and UTILITIES to enable PRINTING, AMENDING, DELETING and SEARCHING of FILES.

ALSO AVAILABLE FOR THE TORCH Z80, ACORN Z80 & 6502 2nd PROCESSORS.

SEND FOR FURTHER DETAILS AND SAMPLE PRINTOUTS TO:-

**PRO-SOFT, 146 CROSLAND ROAD, OAKES,
HUDDERSFIELD, WEST YORKSHIRE
TELEPHONE: 0484 659186**



Softlife

NUMERIC KEYPAD

for the

BBC MICRO

Any BBC user will be aware that entering numeric data on the BBC keyboard, whether for business, educational or scientific purposes, is a slow and inefficient process. The Softlife Numeric Keypad changes all that. Speedy entry of numeric data is now possible — as on many more expensive computers.

Features

- ★ N-Key rollover
- ★ Only connection to user port
- ★ High quality keys
- ★ Hand held, or free standing
- ★ Software provided on eprom
- ★ Simple selection command
- ★ Standard mode uses no user RAM — optional fully programmable mode also available
- ★ Maximum software compatibility

Also available

Softlife's much acclaimed EPROM PROGRAMMER ('I'd buy one' — Acorn User) with software on Eprom and documentation — £66 + £1 p&p + VAT. 2764 Eprom (250 ns) — £6.50 + 50p + VAT. 27128 Eprom (250 ns) — £17.25 + 50p + VAT. UV Eprom eraser — £19.95 + £1 + VAT. User port extension — £9 + 75p + VAT. 1MHz Bus extension — £11 + 75p + VAT.

All products and data available from:

SOFTLIFE LTD
7 Rose Crescent, Cambridge CB2 3LL
Tel: (0223) 62117



£59
+ £1.25 p&p
+ VAT

Professional
Software

CONTEX

Fast delivery
for the BBC Computer

THE CONTEX SPREADSHEET

must be the most versatile spreadsheet program available for your BBC computer. It will process virtually any financial or statistical column/row analysis calculations. Prepare your home and office budgets, process accounts, complicated invoices, job costing, financial modelling, expense evaluations, foreign exchange, record stocks and shares, fixed assets etc.

Over 1,000 cells in upto 26 columns and 99 rows. Data, formulae or text in any cell. Individually variable column widths (1-30 chrs) and decimal places per column. Nine digit accuracy. Various printer formats. Row and column insert and delete with auto formulae adjust. Use any BBC function, eg LOG, SIN, SQR. Many new functions, eg MAX, MIN, SUM DISCOUNT. Replicate formulae and data with auto adjust. Variables. Colour. Four way scrolling while headings stay on screen. Edit. Search. Help. Limits. Access to OS/DFS commands, eg *DISC. Modify. Reference cells by id, eg al, or its headings, eg :JAN:GAS: Full instruction booklet with tutorial, reference and examples.

Insurance comparison

Net Present Value at 7% initiation/annum

Year	Company A	Sum	Company B	Sum	NPV
1	50000	50000	50000	50000	
2	50000	46729	50000	46729	
3	50000	43672	50000	43672	
4	45000	40559	50000	40815	
5	65000	49588	50000	38145	
6	65000	46344	75000	53474	
7	64500	56306	75000	49976	
8	64500	52622	75000	46706	
9	64500	49180	75000	43651	

Cassette £9.99 inc.


MK IV SPREADSHEET

Using advanced disc overlaying techniques Contex has now considerably enhanced the disc version of SPREADSHEET with more than 30 significant extra facilities. In addition to all the features in the standard version the Mk IV includes:

Complete format control, set text and data left or right justified and decimal places globally, by column and/or right down to individual cell settings. Programmable scripted input. Programmable printed output. Sort by column or any section of a column. Merge selected portions of models. Ascii file input from own program or WP. Dynamic calculator using interactive input, existing formulae or data and functions. View formulae in model. More functions. Spool output for WP. Brand new manual. And more! Mk IV will handle models in excess of 1,000 cells (even upto 1,400 cells at a push).

Mk IV Spreadsheet (available on disc only) £14.99 inc.

Existing users may upgrade; return original cassette for disc £7.99 inc.
return original disc £5.99 inc.



TYPING TUTOR

- Learn to touch type quickly
- Over 90 smoothly graded lessons
- Intelligent line check/word scan system
- Recommended by Adult Educational Authorities
- Optional clock, audio key click, metronomic pacing, revise targets
- Optionally insert own lessons for specific training (eg foreign language)

Cassette £9.99 inc.

Disc £11.99 inc.

Post to: **CONTEX COMPUTING,
15 Woodlands Close, Cople, Bedford MK44 3UE.**

Please send me TYPING TUTOR/SPREADSHEET* on CASSETTE/DISC 40 TRACK/DISC 80 TRACK*

Enclosed cheque/P.O. for £_____ (overseas add £2.00) Payable to CONTEX COMPUTING.

Name

Address

* delete as appropriate.

MU4

School business centre seeks industry links

LIAISON between industry, business and schools is the aim of the Centre for Industrial Studies at the King's School in Grantham, Lincolnshire.

The project was originally the idea of the headmaster Derek Lee and already the school has attracted funding from the Department of Trade and Industry, county council and Leverhulme Trust, among others.

From October, an industrialist and assistant will be employed full-time at the school to advise on the scheme and help with lessons. These two posts have yet to be filled, but it is planned to make the salary attractive enough to tempt people from local firms.

Derek Vaughan, one of the organisers, explained: 'We hope to act as a resource

centre for the whole area, and to develop links with other schools.

'Companies will be invited to come into the school to give advice. If they give monetary back-up that would be super, but it's a secondary feature.

'They could help in geography for example, where the reasons why a firm came to

this area are important, or in economics where they could give a fund of information.'

King's School is already working with the local electricity company on developing a teaching package.

For details contact CIS, The King's School, Grantham, Lincolnshire. Tel: (0476) 63180.



Keypad for £44.95

No memory loss with BBC keypad

KEYPADS were developed to save time entering numerical data, and this one has the added advantage that it takes up none of the BBC micro's precious RAM.

The makers claim it is compatible with all commercial software, and, because it connects in parallel with the main keyboard, doesn't use up any interface ports.

The pad contains decimal point, 0 to 9 and return keys.

It costs £44.95 (inc VAT and post) from Commercial Products, 11 Hylands Close, Furnace Green, Crawley, Sussex RH10 6RX. Phone: (0293) 30174.

Accounts all on one disc

SMALL businesses which need their accounts sorted out without resorting to a dozen discs could take a look at Integrated Accounting from Diamondsoft.

For £125 plus VAT, it provides on one disc a cashbook, ledgers, VAT and cash flow

analysis. A disc drive (40 or 80-track) and printer are needed.

The manual was produced using an Epson, and although pages aren't numbered or indexed, system updates and additions are mentioned, so hopefully these omissions will be among the first few.



ALL SEVEN TITLES
FROM ACORNSOFT'S INTEGRATED BUSINESS SUITE FOR

£245 (VAT, post, included)

plus

BBC SYSTEM 100k DISC DRIVE

THESE seven packages all come on 40-track format discs and form an integrated suite, so data from one can be used with the others. The recommended price is £174.65, with the drive costing £199. Therefore you save £128.

The programs titles are: Mailing System, Invoicing, Accounts Receivable, Accounts

Payable, Order Processing, Purchasing and Stock Control.


Just clip the marked corner of this advertisement and send it with a cheque for £245, payable to Vector Marketing, to the address below. Don't forget your name and address.

Address for offer is: Acorn User Offers, Vector Marketing, London Rd, Wellingborough, Northampton NN8 2LR

SAVE £128
Acorn User
offer
RAU6

BBC Microcomputer in the NORTH

CTECH Computers Telephone: 061-366-8223/7794

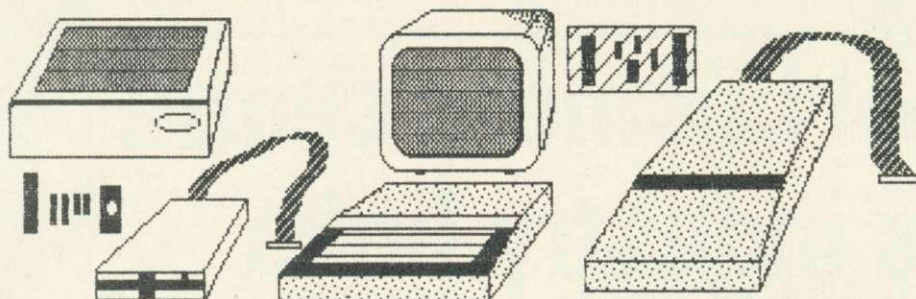

Computers

	£	p
BBC Model B	302.57	
BBC Model B with DFS	364.95	
BBC Model B with DFS & Econet	414.35	
BBC Model B with DFS & Wordwise	394.35	

**BBC Model B
with DFS
& 100K disc drives
only £433.91**

Acorn Equipment

	£	p
6502 2nd Processor	£173.04	
Z80A 2nd Processor	£346.95	
Teletext Adaptor	£199.00	
Electron Computer	£112.17	
Electron Plus One	£51.30	

All computers come with Free Cassette Lead.

Most add-ons include free fitting and installation.

Monitors

	£	p
Philips Hi Res Green Screen	77.39	
Philips High Res Amber Screen	81.74	
Microvitec Medium Res	260.00	
Microvitec Normal Res	199.00	
Philips TV/Monitor	199.00	
Fidelity TV/Monitor	199.00	


Light Pens and Joysticks

	£	p
R. H. Electronics Light Pen	39.50	
Joystick Pairs	17.35	
Hi-Fi Extension Cable	5.17	
Atari-type joystick to BBC interface	13.00	

Components and Cables

	£	p
2764 Eprom	6.52	
27128 Eproms	17.35	
8271 Disk Controller	POA	
BBC to Centronics Printers 1/2m	11.26/13.00	
BBC to serial printer	13.00	
Disk Drives Datacable	8.65	
Disk Drives Power Cable	2.57	
R.G.B. Cable	3.44	
BBC to Ferguson Monitor Cable	3.44	
Cassette Leads	4.78	
TV Leads	2.57	

DISKETTES



Boxes of 10 diskettes
XIDEX s/s d/d £15.22
XIDEX d/s d/d £16.09
XIDEX diskettes £15.22
Control Data d/s d/d 96 TPI
£19.91
Control Data s/s d/d 96 TPI
£14.74
Memorex Diskettes
at very good prices P.O.A.
'Storage boxes' £2.17
Printer Ribbons
Epson FX80/RX80/MX80 £4.34
NEC/Imagewriter Ribbons £5.21
Canon PW 1080A/KP 810 £7.82
Brother HR15 Multi-Strike £4.34

Addons

	£	p
LVL/Computer Village ROM/RAM board	39.50	
HCR Electronics Eprom programmer	49.00	
OEL 200 Prestel Terminal	59.00	
Acorn Speech Synth	47.83	
Chip Chat Speech Synth	26.04	
Pace Grapevine	POA	
LVL Music Keyboard	85.90	

ROM Software

	£	p
Wordwise	34.74	
Graphics ROM	28.65	
Print Master	28.65	
View 2.1	52.09	
Ultra-Calc	56.48	
1.2 O.S.	10.00	
Disk Doctor	28.65	
BCPL	86.09	
Termi	28.65	
Commstar	30.39	
Viewsheets	52.09	
Beebugsoft Toolkit	23.48	
Spellcheck	17.35	
ALL Beebug titles now in stock		
Starbase	59.00	
Gemini Datagem	113.00	

TEC TEAC

DISK DRIVES FROM £95.00 + VAT
Bare CUMANA CSX100, Slimline, 40 Track, Single Sided, 100K (200K Double Density).
As above but complete with Cables, Case and Manual, **£104.30 + VAT**
Bare TEAC55F, Slimline, 40/80 Track, Double Sided 400K (800K at Double Density), **£169.00 + VAT**
As above but complete with Cables, Utility Disk, Cables, Case and Manual, **£185.00 + VAT**
TEC Disc Drives from **£104.30 + VAT**

TEC TEAC CHINON

DUAL DRIVES FROM £199 + VAT
Dual TEC, Slimline, 40 Track, Single Sided 2 x 100K (2 x 200K Double Density). Complete with Cables, Utility Disk, Cables, Case and Manual, **£208.61 + VAT**
Dual TEAC 55F, Slimline, 40/80 Track, Double Sided 2 x 400K (2 x 800K with Double Density). Complete with Cables, Utility Disk, Cables, Case and Manual. (With your drive you may need an interface), **£346.96 + VAT**

SHUGART

SHUGART 100K Disc Drives with case, cables, formatting disks & manual only **£73.87**.
SHUGART DUAL 100K Disc Drives only **£147.83**

ACORN

DISK INTERFACES
The standard Acorn Interface is available from us this uses the 8271 disk controller which gives very fast access to disk files.
Acorn DFS is the standard for the BBC Micro it allows 31 files per disk and a maximum of 800K on 4 logical drives. Phone for latest prices.

CANON NEC

PRINTERS
CANON PW 1080A/KAGA KP810. This is the latest state of the art in printer technology. This machine out performs the EPSON FX80. It will do everything the FX80 does and more besides and using the same control codes! What makes the PW1080A so special is not only its superb value for money but the near LETTER QUALITY mode. We include a free screen dump and our BBC Micro Instructions as well as the excellent manual **POA**.
Brother M1009. Completely Epson compatible dot matrix printer. Superb value at only **£169.95**.
Epson RX80+ **£247.83**
Epson FX80 **£346.95**

PRICES ...

All our prices are constantly moving, so please ring us to check the latest price.

All prices plus VAT

FREE DELIVERY TODAY (Orders over £90)

ASK ABOUT OUR INSTALLATION SERVICE
If you are in Greater Manchester, Cheshire, Lancashire, Midlands, Merseyside, West Yorkshire or South Yorkshire, if you ring us now we can send one of our highly trained staff to install your computer equipment today.
(Now for business software too!)



CTECH COMPUTERS

**184 Market Street,
Hyde, Cheshire
SK14 1EX
061-366 7794
061-366 8223**

MAKING THE MOST OF CP/M

In the first of a series of articles aimed at ABC business micro users Edward Brown explains how CP/M works

ACORN is putting itself firmly in the business computer field with the introduction of the ABC range. The ABC100 and ABC110 are Z80-based and, like the Z80 second processor, come supplied with CP/M 2.2 and a bundle of business software (table 1). This series of articles will introduce you to CP/M (Control Program for Microprocessors) on these Z80-based Acorn machines and explain how to use them to full advantage. I shall refer to CP/M 2.2 as CP/M-80 and to the ABC100/110 and BBC micro with Z80 second processor as the Acorn machines, throughout.

Why CP/M-80?

CP/M was one of the first micro-computer operating systems written to handle floppy discs and version 2.2 has become the accepted operating system for business and is now used on hundreds of machines. Due to this wide acceptance of CP/M-80 thousands of software packages are available covering almost every conceivable application, and so there is a comprehensive range of 'off the shelf' software. Many packages are also available in the public domain and can be obtained for little or no cost. (Public domain software is freely available for anyone to use as they wish.) Some of these are excellent and I'll be looking at these in the future. In this country, the CP/M User Group UK (72 Mill Road, Hawley, Dartford, Kent DA2 7RZ) can supply public domain software from its library of over 200 discs for approximately £4 per disc - the charge is to cover costs.

This vast range of software has become available because a program

written for CP/M-80 can be taken from a CP/M-80 environment on one computer and run in the same environment on another. It is this portability that makes CP/M-80 so popular.

What is CP/M-80?

CP/M-80 is a control program or operating system which manages the resources (printer, disc, etc) of the micro and provides a standard interface for software written to run on any CP/M-80 machine. Unlike the MOS (Machine Operating System) of the BBC micro, which is ROM-based, CP/M-80 is a disc-based operating system. This means that every time one of the Acorn machines is turned on or reset CP/M-80 has to be read into the memory used by the Z80 processor from the system tracks of the disc. This procedure is known as 'booting' or 'bootstrap loading' and is carried out by a ROM in the Z80 memory.

Once this ROM has loaded CP/M-80 into the Z80 memory, it then controls the machine and provides the same sort of facilities as the BBC MOS in that it gives a disc filing system and controls the peripherals, such as keyboard, screen, printer and disc drives.

Portability

CP/M-80 is logically divided into three distinct parts:


- CCP - Console Command Processor
- BDOS - Basic Disc Operating System
- BIOS - Basic Input Output System

The CCP and BDOS are hardware independent and remain the same for CP/M-80 on all machines. The BDOS

provides high level commands such as those for reading and writing of strings and file manipulation. The BIOS is hardware dependent and provides the input and output primitives (the lowest level of I/O) for reading and writing to the peripherals.

Access to the individual routines is through a hardware independent jump table (list of entry points) at the start of the BIOS. The BIOS jump table together with the CCP and BDOS provide a standard interface which is the same for all CP/M-80 based systems. For example, a call to the fourth entry point in the BIOS jump table will return a seven-bit ASCII character from the keyboard on all CP/M-80 systems. However, the actual process involved in getting the character from the keyboard will be different in each machine. Most read the character directly from the hardware but on the Acorn machines the character is passed from the BBC, which acts as an I/O processor, via the Tube to the BIOS in the Z80. So, regardless of the physical implementation of the BIOS, the logical interface with CP/M-80 remains static and provides the necessary portability.

Although software written to run on one CP/M-80 machine will run on any

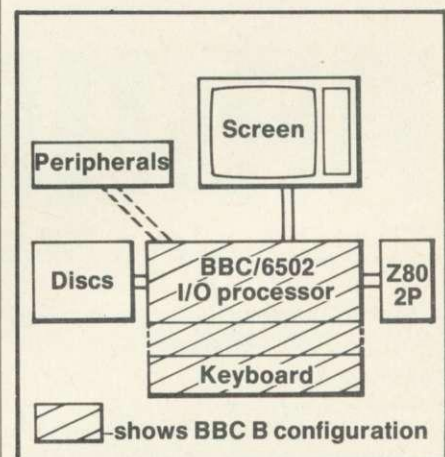


The CP/M set-up for the BBC micro

other there are problems in transferring data between them by disc. The most obvious cause is the use of various sizes and densities of disc.

One of the easiest ways to overcome this is to use a communications package (such as the commercially available BSTAM from Acornsoft or the public domain UKM7 from CP/MUGUK) to transfer data and programs between machines using the RS423 serial port. This method also allows you to do this between remote machines via the telephone network. As Acorn machines are popular, most suppliers of software will provide programs on Acorn format discs. The standard format between all Acorn machines is single density and

STARdataBASE . . .

The database

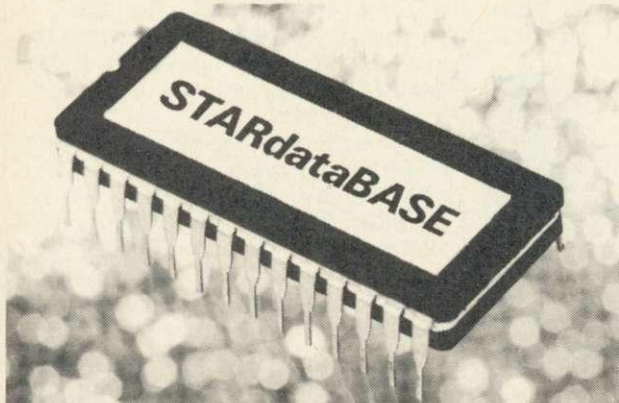

for the BBC

STARdataBASE£86.25 inc VAT
Post & Packing£1.75 inc VAT



GCC (Cambridge) Limited
66 High Street, Sawston, Cambridge CB2 4BG
Telephone: Cambridge (0223) 835330/834641
Telex: 81594 SAWCOM



The STARdataBASE, professional database management system consists of a 16K ROM, 75K of extension and applications software on disc and a comprehensive manual. STARdataBASE was designed by a chartered electronics and software engineer to meet a defined need for a high specification, disc-based random access system. The database program and extension software is "Menu Driven", particularly user-friendly, quick to use, but extremely powerful and totally flexible. It is absolutely ideal for use in schools, clubs, colleges, small businesses and in the home.

- Menu driven throughout.
- True random access - will locate a single record in under 2 seconds typically.
- File size is the capacity of a single disc (double sided if applicable) - minus 5K.
- Maximum number of fields 69.
- Maximum number of characters in a field 255 (subject to an overall maximum of 920 in a record).
- Up to 4096 records.
- Records are displayed and input on a "Card Screen" principle. Layout of fields and headings are built entirely by the user by "Painting" on the screen (colour can be used).
- Direct and rapid entry of data into all or selected fields.
- Search criteria include =, <>, >, <, a wildcard "anywhere in the field", and "nowhere in the field".
- Unlimited and rapid sequential searching and selecting.
- All or selected records can be sorted to a depth of 5 fields, each in ascending or descending order, using the super-fast Shell-Metzner routine.
- Instant print or display review of file, giving breakdown of record size, number of records possible and space used, etc.
- Address and label printing (up to 8 across the page).
- Selected whole or part field-content printing with left and right justification, tabbing, and embedded printer control codes possible. Can be mixed with text for invoices and form letters etc.
- Can be configured for any printer (including £ character definition).
- Continuous or paged printout with page heading and pause at each page end, with "New Page" prompt.
- Repeat printing for multiple copies.
- Percentage and arithmetic operations to specified decimal placing.
- Field statistics giving totals, mean and standard deviation, variance and squares.
- Optional password lock.
- Full documented routines (in Basic) which can be spooled onto user-written tailor-made file management and interrogation programs.

STARdataBASE meets and even exceeds professional standards found on large installations. It is unique in speed, flexibility, and ease of use.



Trade and local authority enquiries welcome.
Prices correct at time of going to press.



RAMROM 15

The Sideways RAM & ROM Expansion Board for the BBC

The GCC RAMROM 15 board adds to the BBC Micro another eleven sideways ROM sockets plus the necessary hardware for sideways RAM.


FEATURES

- * Fully buffered board.
- * Rechargeable battery backup for RAMS provided as standard. Recharging circuitry is included.
- * The board can be powered by an external 5 Volt power supply, available as an optional extra.
- * The unit comes in a case of its own and resides outside the BBC Micro, giving easy access to the resident ROMs.
- * For those involved in development work, most of the 6502 processor signals are made available outside the BBC Micro.
- * Priority or selection can be assigned to either RAMS or ROMS.
- * ROMS can be used in RAM positions simply by changing two push-on links.
- * Simple installation - NO soldering.
- * Can be installed together with most other BBC add-on boards.
- * ZIF-sockets available as optional extras. Up to 15 may be housed on the RAMROM 15 at any one time.
- * All socket positions are software selectable.
- * Free Utilities Disk supplied.
- * Comprehensive User Manual included.

RAMROM 15£129.95 inc VAT (P&P £3.50 inc VAT)
EXTERNAL PSU£5.75 inc VAT (P&P £1.73 inc VAT)
ZIFSOCKETS£9.00 inc VAT Free P&P with RAMROM



Trade and local authority enquiries welcome.
Prices correct at time of going to press.

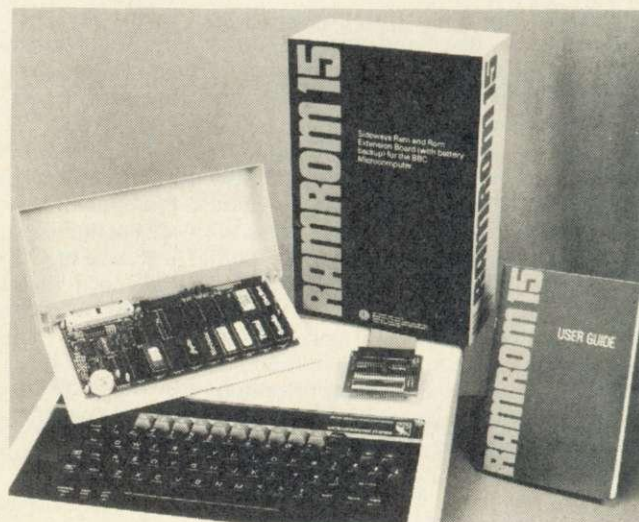

GCC (Cambridge) Limited
66 High Street, Sawston, Cambridge CB2 4BG
Telephone: Cambridge (0223) 835330/834641
Telex: 81594 SAWCOM

the ABCs can read and write this as well as the double density format.

CP/M-80 on the Acorn machines

All three Acorn machines share the same basic layout (figure 1). Each has a 6502 I/O processor and memory, a Z80 processor and memory, a screen, a keyboard and disc drives. In the Z80 second processor configuration the keyboard and 6502 I/O processor are provided by the BBC micro. Other peripherals such as printers, plotters and modems can be attached as required. Although the basic layout is the same there are differences (tables 1 and 2).

The 6502 I/O processor contains a MOS which provides all the OS commands and VDU codes available on the BBC micro. These can be used in addition to the standard facilities of CP/M-80, and provides a very flexible method of temporarily setting up the machine for a special use such as a serial printer or slow baud rate for communications. For more permanent facilities, such as always selecting a serial printer, Acorn have provided a patch area in the BIOS - I'll show you how to install patches in a future article.

Both CP/M-80 and the 6502 MOS provide facilities to redirect input and output through different devices and mixing these can cause unexpected results - one of the drawbacks of such a flexible system. It's best, wherever possible, to use the facilities provided by CP/M-80.

Booting CP/M-80

I'll look briefly at the different ways of booting CP/M-80. On the Acorn machines there are three options: turning the machine on, pressing the CTRL and Break keys together, and pressing the Break key by itself. On the ABCs the Break key is at the back of the keyboard in a position where it can't be pressed accidentally.

Turning the machine on and pressing CTRL Break have the same effect in that they reset the machine to the default state and boot CP/M-80 from disc. Pressing Break by itself produces a * prompt and then any of the 'star' commands can be entered. When ready to boot CP/M-80, one of the additional commands (CPM or WCPM) is entered to boot from the disc or Winchester hard disc respectively and control is passed to the ROM in the Z80 processor memory.

This ROM contains code for making MOS calls via the Tube and the bootstrap code for loading CP/M-80 into memory. The code for making MOS calls is copied to the top of memory and then CP/M-80 is read from disc and the ROM is switched out of the Z80 memory

```
A>DIR
A: MOVCPM      COM : GSX      SYS : DDFXHRB  PRL : DDFXLRB  PRL
A: DDFXLR7     PRL : DDOKI84  PRL : ASSIGN  SYS : DDBBCO   PRL
A: DDBBC1      PRL : MALLARD  COM : UNLIST  COM : CONVERT  COM
A: PREPARE     COM : MEMO     OVL : READDFS  BBC : 6502-Z80  BBC
A: MEMO        COM : VERIFY   BBC : ACTIONS  DEF : MEMOHELP  TXT
A: MERGE       BBC : CONFIG   COM : RECOVER  COM : CRC      COM
A: CRCKLIST    CRC : COPY     COM : FORMAT  COM : VERIFY   COM
A: TERM        COM : BBCBASIC COM : DDT     COM : STAT    COM
A: ED          COM : MEMOP     COM : XSUB    COM : MPP     OVL
A: CONFIG      DAT : SORT     BBC : ASM    COM : SUBMIT  COM
A: STAR        COM : SYSGEN   COM : PIP     COM : DUMP    COM
A: LOAD        COM : DIP      COM : GENGRAF  COM : FORMPREP COM
A: MEMO        SWP :          $$$
```

The catalogue produced by a CP/M file

	Z80	ABC100	ABC110
Processors	Z80/6502	Z80/6502	Z80/6502
Floppy disc	2 x 400k	2 x 720k	1 x 720k
Hard disc	no	no	1 x 10Mb
Screen	Monochrome or colour	Monochrome	Colour
Software available	CP/M-80, GSX, MemoPlan, FilePlan, GraphPlan, Accountant, Nucleus, BBC Basic, Professional Basic, CIS Cobol	CP/M-80, GSX, MemoPlan*, FilePlan, MicroPlan†	CP/M-80, GSX, MemoPlan*, FilePlan, MicroPlan†

*MemoPlan on the ABCs includes a full configuration program
†MicroPlan includes GraphPlan

Table 1. Comparing the Z80, ABC100 and ABC110

	Hard one	Hard two	Double Density Floppy	Single Density Floppy	
Mixture	A B	C D	E F	G H	
2W+2DDF	A B	C D	E -	G -	
2W+1DDF	A B	C D	- -	G H	
2W+2SDF	A B	C D	- -	G -	
2W+1SDF	A B	C D	- -	G -	
1W+2DDF	A B	- -	E F	G H	
1W+1DDF	A B	- -	E -	G -	ABC110
1W+2SDF	A B	- -	- -	G H	
1W+1SDF	A B	- -	- -	G -	
0W+2DDF	- -	- -	A B	C D	ABC100
0W+2SDF	- -	- -	- -	A B	BBC + Z80

NOTE Double density drives can be used for both double density and single density

KEY

The letters A to H refer to the eight possible disc drive designations. Thus the BBC + Z80 has two possible disc drives, configured as A and B. The key to the Mixture column is: W = Winchester, DDF = Double Density Floppy, SDF = Single Density Floppy. Thus 1W + 1DDF is read as 'One Winchester with one double density floppy'.

Table 2. Possible CPM disc drive configurations

space. If the ROM was entered by the CPM command it tries to boot from the disc. If it was entered by the WCPM command, power on, or CTRL Break, it tries to boot from the Winchester and if this is not successful, it then tries the disc.

The Console Command Processor (CCP)

When CP/M-80 boots up it defaults to drive A and prompts for input: A>. While CP/M-80 is waiting for input certain control characters have a

special effect and these are summarised in table 3. The most important is CTRL C which, when typed as the first character after the prompt, performs a warm boot of CP/M-80, ie, the CCP and BDOS parts of CP/M-80 are re-read into memory from the disc. This is done so that applications programs running in the Transient Programming Area (user's Basic program area on the BBC micro) can use the space occupied by the CCP and BDOS. Most applications, however, do not use the memory occupied by the BDOS. It is necessary to type a CTRL C before accessing a

changed disc otherwise the disc becomes read only. The CTRL C causes the disc to be logged in by reading the disc directory (catalogue) to create a map of the sectors used and a check byte to protect against the disc being changed without a CTRL C being typed.

Command Types

There are two types of command in CP/M-80—built-in and transient. The CCP will take the input and test to see if it is a built-in command and, if so, execute it. If it is not, it will access the disc to see if it is a transient command and carry it out if it is. If it is neither it re-displays the input followed by a question mark and re-prompts for input.

Built-in Commands

I'll now look at these built-in commands in more detail, give an example of each and the nearest BBC DFS equivalent. These are shown in table 4.

: As the first character of a line this instructs the CCP to ignore that line. This is not of use when typing from the keyboard but is of great help when a file of commands is created and later run using SUBMIT, eg, :THIS IS A COMMENT LINE IGNORED BY THE CCP.

d: Selects drive d as the default drive. All subsequent commands that do not specify a drive will use drive d. CP/M-80 allows up to 16 drives but only eight are used on the Acorn machines (table 2). For example, B: will log in drive B and the CCP prompt will become B>.

CTRL C	At start of line causes warm boot
CTRL E	Physical end of line, line sent on return
CTRL H	Backspace one character position
CTRL J	End of line input, line feed
CTRL M	End of line input, carriage return
CTRL P	Echo displayed characters to printer
CTRL R	Re-display current line
CTRL S	Pause display, resumed by any character
CTRL U	Delete the current line
CTRL X	Delete the current line
DEL	Deletes the last character typed

Table 3. CP/M-80 control characters

USER <n> Selects a different user number for subsequent commands. There can be up to 16 user numbers allowing each drive to be split into independent areas. Files in one user area cannot be seen from others. The default user area is zero eg, USER 5 will select user area five for all subsequent disc accesses.

All the remaining built-in commands require a file reference, which in CP/M-80 consists of a file name and a file extension separated by a dot. File references can be made ambiguous by including the wildcard characters * and ? in any position. ? means that any character will do and * means that a range of characters will do. The wildcards ? and * correspond to the wildcards # and * in the Acorn DFS. A file reference with one or more of these characters in it is called an Ambiguous FileName <afn>. Other file references are called Unambiguous FileNames <ufn>. Both <ufn>s and <afn>s can optionally be preceded by a drive specification of the form d: where d is the drive letter. See table 5 for examples of file names.

ERA <afn> or **ERA <ufn>** will erase the files specified from the directory of the drive named. If no drive is specified, the currently selected default drive is used. If *.* is typed as the <afn>, the CCP will prompt ALL FILES (Y/N)? and will only delete the files if Y is typed in response, eg, ERA*.PRN will erase all files with the extension PRN.

DIR <afn> or **<ufn>** will produce a display of the file references that occur on the specified drive. The command DIR without an <afn> or <ufn> can be used to get a display of all files on the currently selected default drive, eg, DIR B:*. PRN will display a list of file references for all files with the extension PRN on drive B.

REN <ufn1> = <ufn2> will rename the file <ufn2> with the name <ufn1>. Both <ufn1> and <ufn2> must be on the same drive. If a drive name is specified then it must be the same for both drives, eg, REN B:TEST.OLD = B:TEST.TXT will rename the file TEST.TXT on drive B as TEST.OLD.

SAVE <n> <ufn> will save <n> pages of 256 bytes starting at location 100H to the file specified by <ufn>, eg, SAVE 4ONEK.FIL will save 1k of memory starting at location 100H to the file ONEK.FIL on the currently selected default drive.

CP/M-80	BBC
:	REM
B:	*MOUNT†
USER	*DIR
ERA	*DESTROY
DIR	*CAT
REN	*RENAME
SAVE	*SAVE
TYPE	LIST

Note the difference between DIR on CP/M and *DIR on BBC
†MOUNT is available on the Advanced Disc Filing System only

Table 4. The nearest BBC DFS equivalent to built-in commands

ASM	Intel 8080 assembler source code
HEX	Intel hexadecimal format file for load utility
COM	Computer executable file, run by typing name without extension
BAS	Professional Basic source code, can be tokens or ASCII
BBC	BBC Basic source code
TXT	Text file
DAT	Data file
SWP	Temporary file used by MemoPlan for storing text being edited
\$\$\$	Temporary file created by various programs when running, should be deleted
PRN	Print file
SYS	Files used by the GSX system for control
PRL	Device drivers for GSX
OVL	Overlay files for programs larger than the memory available, these can be loaded in by the main program
TBL	Table from the GraphPlan package
CHT	Chart from the GraphPlan package
#DF	Worksheet from FilePlan
CBL	Cobol source file
FSS	Print file from MemoPlan
TSS	Print spool file from MemoPlan
BAK	Backup file created by MemoPlan and other programs

Table 5. Examples of file extensions

TYPE <ufn> will display the contents of the file specified on the screen, eg, TYPE B:TEST.TXT will display the contents of the file TEST.TXT on drive B.

Transient Commands

A transient command is any computer-executable file with the extent COM. There are several such commands for the Acorn machines, such as FORMAT, VERIFY, COPY and PREPARE, as well as the standard CP/M-80 transient commands, such as STAT, PIP and DUMP.

These transient commands are applications programs loaded from disc into the Transient Program Area starting at location 100H and then run. All programs written to run under CP/M-80 should start at location 100H, as below this is the Base Page where the system variables are kept by CP/M-80.

The Catalogue

The catalogue produced by a CP/M file looks awesome at first sight. However, the information provided when you

ARIES-B12 £46.00 ARIES-B12C £5.75

ARIES is the high-quality expansion system for the BBC Microcomputer. ARIES products are compatible with double-density disc controllers, second processors, ECONET, hard discs and much more. Several major companies now test all their products with ARIES to ensure compatibility. The ARIES range includes:

- ★ ARIES-B20—this unique 20K RAM expansion allows you to run BASIC, BCPL, COMAL, FORTH, LISP, LOGO, PASCAL, ETC, PROGRAMS UP TO 28K long, *without* sacrificing graphics and 80-column text.
- ★ ARIES-B12—The Sideways ROM board with a difference: fit it inside the case for security, or outside the case for accessibility.
- ★ ARIES-B488—a full implementation IEEE-488 bus interface which allows you to connect your BBC Micro to a variety of programmable laboratory instruments.

For full details of these and other ARIES products, ask your local dealer or contact us direct:

Aries Computers

Science Park, Milton Road, Cambridge CB4 4BH

Telephone: (0223) 862614. Telex: 817114 CAMCOM G

(ARIES COMPUTERS is a division of Cambridge Computer Consultants Limited)

Microdis


46 MIDDLE STREET, BLACKHALL, HARTLEPOOL,
CLEVELAND TS27 4EA
Tel: 0783 872430

MAIL ORDER ONLY

	Ex VAT	Inc VAT & Carriage
PRINTERS		
Dot Matrix		
Epson RX80	189.00	221.95
Epson RX80 F/T	217.95	255.25
Epson FX80	315.00	366.95
Taxan Kaga KP810	248.95	288.75
Taxan Kaga KP910	334.95	389.95
Daisywheel		
Daisystep 2000	215.95	252.95
Queen Data	219.95	257.50
Juki 6100	317.75	369.95
MONITORS		
Green		
Sanyo 12N	69.00	83.95
Sanyo 12N (Hi Res)	89.50	107.50
Colour 14" Screen		
Sanyo SCM14N (400 dots)	169.00	198.95
Sanyo SCM14M (600 dots)	269.50	314.95
Sanyo SCM14H (800 dots)	382.00	443.95
Microvitec		
BBC		
1431 (452 x 585 dots)	169.95	199.95
1451 (653 x 585 dots)	225.95	264.45
Sinclair		
Spectrum 1431	215.95	252.95
QL 1451	191.95	225.45
IBM		
IBM 1456	342.95	398.95
IBM 1446	429.35	498.95
MEDIA		
Cumana Diskettes 5.25" boxed in 10's with Plastic Library Case		
40 Track SS SD	13.50	16.50
40 Track DS DD	13.50	16.50
80 Track SS SD	13.50	16.50
80 Track DS DD	13.50	16.50
HEAD CLEANING KITS		
3M Standard	12.50	15.90
De-Luxe	15.60	19.50
COMPUTERS		
BBC Model B	335.74	389.95
COMPUTERS		
BBC Model B with QFS Disc Interface	387.26	449.95
Electron (complete with Acorn cassette recorder, 3 games cassettes and Yorkshire TV book)	159.95	188.54

NOTE: ALL PRICES INCLUDE VAT AND CARRIAGE

	Ex VAT	Inc VAT & Carriage
ANCILLARIES		
Acorn Data Recorder	27.95	34.95
Sanyo DR101	28.95	35.95
Sanyo DR202	36.95	45.30
Teletext Receiver	184.95	215.35
Speech Interface Kit	46.90	55.50
6502 Second Processor	173.50	202.17
Z80A Second Processor	308.95	357.95
ATPL ROM Board	37.95	44.95
CUMANA DISC DRIVES		
BBC CSX (Excluding PSU)		
CSX100 40 Track Single Side (100k)	94.95	113.85
CSX200 80 Track Single Side (200k)	118.95	141.45
CSX400 80 Track Double Side (400k)	138.95	164.45
With PSU		
CS100 40 Track Single Side (100k)	114.95	136.85
CS200 80 Track Single Side (200k)	138.95	164.45
CS400 80 Track Double Side (400k)	158.95	187.45
Dual Drives (with PSU)		
CD200 2 x 40 Track Single Side (200k)	203.95	239.20
With 40/80 Switch		
CD400S 2 x 80 Track Single Side (400k)	258.95	302.45
CD800S 2 x 80 Track Double side (800k)	305.95	356.50
EPROMS		
2764	5.60	7.40
27128	18.50	22.25
DISC UPGRADES		
QFS Single/Double Density	60.82	69.95
UTILITIES		
Wordwise	31.75	37.50
Wordwise Plus	39.70	46.75
View Word Processor	43.68	51.21
Printmaster	23.25	27.75
Communicator	47.30	55.39
(VT100/52 Terminal Emulator)		
Help	17.45	21.25
Sleuth	20.15	24.15
LISTING PAPER		
Boxed 2,000 Sheets		
60 GSM (Listing) 9.5" x 11"	10.50	15.60
85 GSM (Letter Quality) 9.25" x 12"	13.40	19.50

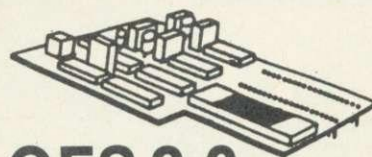

QFS 2.0 DISC UPGRADE £69.95

Inc. VAT and Carriage.

- Supports SINGLE and DOUBLE Density
- Automatic Density Recognition
- Acorn Compatible
- Runs Aviator, Elite, Microtext, Replica II (double density) Mini Office, etc.
- Supports Single and Double Sided Discs
- Automatically recognises 40 or 80 track discs
- Firmware format and verify
- Simple to fit - supplied with instructions
- Complete with manual
- AVAILABLE NOW

**FREE PRINTER LEAD
AND LISTING PAPER WORTH
£14 WITH EVERY PRINTER**

A GREAT PACKAGE DEAL!

For serious users of the BBC Computer.
A professional trio which can be integrated to produce an information management system of exceptional power.


1 SCRIBE

THE PROFESSIONAL WORD PROCESSOR designed for the serious user ■ All operations fully prompted ■ No special knowledge of the computer system necessary ■ Document size NOT limited by computer memory ■ Automatic disc buffering ensures text is moved between disc and computer memory without user intervention ■ Up to 255 pages in a single document ■ 80 column display ■ on screen underline and right justify ■ See it as it will be printed. SCRIBE comes in a chip with 5 minute fitting instructions, utilities disc and manual. DISC MACHINES ONLY.
£59.95 + 60p p&p



2 DATABASE

A superb record keeping system with an incredible operating speed. 96 fields per record ■ One record 2 Kb max ■ One field 900 characters max ■ 4000 records per database ■ 16 level conditional search ■ Find any record in 2 secs ■ Wild card search ■ Record match ■ 8 automatic sub indexes ■ Total flexibility of output via report writer with auto write back to any field ■ Maths pack ■ Semi programming language. Integrates with Scribe to give conditional search with MAIL MERGE and high powered report formatting. Database is in a chip. DISC MACHINES ONLY
£49.00 + 60p p&p.
Scribe & Database in one chip
£95.00 + 60p p&p.




3 DOUBLE-DOS

Double density disc interface for the BBC computer.

A high capacity database or word processor is enhanced even further with this state of the art disc interface. The many features include ■ almost 800 Kb of CONTINUOUS file space on a standard 80 track disc drive ■ Automatically read standard Acorn files ■ Compensate for discs formatted in single density ■ Provide up to 159 files IN ONE DIRECTORY ■ Automatically read, write and format double sided drives to appear as one disc surface ■ Allow maximum use of MERTEC Scribe and Database.

Fitting to your computer is made exceptionally safe and reliable by providing connection via a flexible ribbon cable. Full instructions provided.

£109.25 + 90p p&p



NOW AVAILABLE IN ONE GREAT PACKAGE

DATASCRIBE
IN A SINGLE CHIP!!

DATASCRIBE & DISK INTERFACE



£95 inc VAT

£195 inc VAT

Purchasers of MCP software are provided with a free update service and an unmatched level of technical support. (Updates subject to postal charge.)

Please supply the following products/information (Delete as applicable).

QTY ☐

QTY ☐

QTY ☐

In enclose £

Inc P&P My Credit Card No. is

Visa ☐

Access ☐

Tick which

Name

Address



To: MERLIN COMPUTER PRODUCTS,
33/36 Singleton Street, Swansea SA1 3QN. Telephone: 0792 467980



MERLIN COMPUTER PRODUCTS

IMPORTANT NOTE:

Please check with us if you decide to use any other disc interface than Acorn or Double-Dos with Scribe or Database.



◀ page 136

type DIR not only details the file names but also what types of file they are.

The row of As down the left hand side show that you are logged onto drive A, and thus each of the files detailed is contained on the disc in that drive.

The rest of the catalogue is divided into four columns each separated by a colon.

Each file reference is contained between the columns of colons, eg, MOVCPM COM. Each file reference consists of two parts, the file name and the file extension. The former is straightforward as it is the name of the file. The latter tells you what type of file it is. In the example above, MOVCPM is

the file name and COM is the file extension.

In this case MOVCPM is a program that will allow CPM to be MOVED. COM is shorthand for computer executable file, and means that when MOVCPM is typed in it will cause this file to be exe-

cuted, rather as *EXEC would work on a *SPOOLed Basic file.

There are many different types of file extensions. Table 5 on page 136 contains a list of some of the more useful extensions, with brief descriptions of what they do.

In forthcoming issues of *Acorn User* Edward Brown and Richard Clement will be answering your questions about CP/M and presenting your tips and their own. They are both system designers and consultants, committee members of the Chiltern Branch of the CP/MUG (UK) and are working on a book about CP/M on the BBC micro.


Edward has installed CP/M on several machines and been closely involved with the integration and testing of multi-tasking and real-time software. Richard has designed and built a commercial CP/M based micro and has been involved with software development for multi-tasking operating systems.

So if you've got any problems or hints for CP/M users send them to CP/M Corner, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

Micro Resources Limited


Southfield House, 11 Liverpool Gardens, Worthing, Sussex BN11 1RY
Telephone: Worthing (0903) 213174

**NEW
LOW
PRICES**



BBC MODEL B	£330.00 + VAT = £379.50
BBC MODEL B with ACORN DFS	£399.14 + VAT = £459.00
ACORN Z80 2ND. PROCESSOR	£346.96 + VAT = £399.00
ACORN DISC UPGRADE KIT	£86.09 + VAT = £99.00


CUMANA CSX 100K 40 TRACK	£100.00 + VAT = £115.00
CUMANA CSX 200K 40/80 TRACK	£135.00 + VAT = £155.25
CANON 221 400K 40/80 TRACK	£146.95 + VAT = £169.00
CANON 221 800K 40/80 TRACK	£277.39 + VAT = £319.00

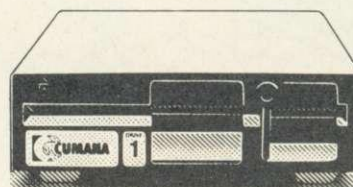

**DISC
DRIVES**


*******SPECIAL OFFER*******
CUMANA CSX 100K DISC DRIVE AND ACORN DFS KIT **£173.05 + VAT = £199.00**
(Includes Manual and fitting instructions)

MONITORS



MICROVITEC STANDARD 14" COLOUR	£164.74 + VAT = £189.00
MICROVITEC MEDIUM 14" COLOUR	£250.00 + VAT = £287.50
PHILLIPS MONOCHROME 12" TP200	£65.00 + VAT = £74.75

EPSON RX80 F/T	£239.00 + VAT = £274.85
ADMATE ADM-80 F/T	£173.06 + VAT = £199.00
QUEN-DATA DAISYWHEEL	£221.74 + VAT = £255.00
BROTHER HR15 20CPS	£405.00 + VAT = £465.75



PRINTERS

**DISCS
and
SOFTWARE**

MR. FLOPPY LIFE TIME
WARRANTY DISCS

SS DD PER 10	£12.61 + VAT = £14.50
DS DD PER 10	£17.40 + VAT = £20.00

ACORN VIEW	£52.00 + VAT = £59.80
ACORN VIEWSHEET	£52.00 + VAT = £59.80
STARBASE	£75.00 + VAT = £86.25
MASS MACRO ASSEMBLER	£35.00 + VAT = £40.25
WORKSTATION VT52	£40.00 + VAT = £46.00

Add £3.00 for carriage on disc drives and £1.00 for discs and software £8.00 for computers, monitors, printers.

Send cheque to the above address or phone to use your visa card or fill in attached coupon.

Quantity and education discounts given, phone for a quotation.



I WISH TO PAY BY VISA
PLEASE CHARGE TO MY ACCOUNT.
MY CARD NUMBER IS

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

SIGNATURE _____

NAME _____

(BLOCK CAPITALS)

ADDRESS _____



141

CAN THE ZEP 100 ZAP THE ACORN Z80?

Simon Williams analyses a contender in the Z80 market

IF YOU intend to use your BBC micro for business work, you may well consider expanding the basic machine with a Z80 processor. This not only gives you an additional 64k of memory, but access to the CP/M operating system and a large range of software written for a variety of machines.

Your first thought may be to buy Acorn's Z80 second processor which, together with its associated software, was reviewed extensively in the June to September '84 issues of *Acorn User*.

There's an alternative, however, and one that has been around in various guises for much longer. Torch Computers brought out a dual disc pack, complete with Z80 processor, soon after the release of the Beeb, and more recently the company has started to sell the Z80 board separately under the name Zep 100.


This unit comes complete with four pieces of packaged software and an operating system ROM called MCP (shades of the film *Tron*). It will cost you

£299, a hundred pounds cheaper than the Acorn product. You'll need a dual disc drive to run with the micro, and you will then have a pretty powerful business system.

The Zep 100 is a Eurocard circuit board mounted with the processor, extra memory and other ancillary chips. A short length of ribbon cable is attached to one end and this terminates with a plug that connects to the Tube socket on the main BBC micro circuit board. The Z80 board is fixed to the


microFAST LATEST BARGAIN PRICES

mono MONITORS



ISL 18 Professional	£60.00
	+ VAT = £69
	ex VAT inc VAT
Amstrad GT64	£51.30 £59
ISL 18 Professional	
18 MHz Metal Case	£60.00 £69
ISL 20 Swivel 80 col.	
20 MHz Tilt + Swivel	
Base	£68.70 £79*

PROCESSORS




BBC Model B	P.O.A.
	ex VAT inc VAT
BBC 'B'	P.O.A.
BBC 'B' with DFS	P.O.A.
Acorn Z80 Ext. Processor	£338.26 £389
Amstrad CPC464	£157.40 £181
5v power + UHF	£24.36 £28
ISL 8088 (IBM Comp)	£1173.92 £1350
DEC 11/23 + 40 MB	£6086.97 £7000
DEC 11/73 + 170 MB	£10434.79 £12000

Special Business Offers with TORCH

ZEP-100	£260.00 ex VAT
ZDP-240	£608.00 ex VAT*


These upgrades for the BBC B(DFS) micro open the door to the world of serious computing. Using the proven Z-80 processor, they provide 64K extra RAM, CPN™ operating system and, three professional software programmes; Perfect Writer® with Speller, Perfect Calc® and Perfect Filer®. CPN™ gives access to the vast range of software written for all CP/M® micros. Also TORCH Graduate: IBM® PC Compatible upgrade. Phone for details.

colour MONITORS



Microvitec 1451 BBC	£242.61
	+ VAT = £279
	ex VAT inc VAT
Amstrad CTM640	£146.97 £169
Microvitec 1431	£169.58 £195*
1431 (RGB/PAL/AUDIO)	
Microvitec 1451/QL	£230.43 £265
Microvitec 1451	£242.61 £279
1451 (RGB/PAL/AUDIO)	
Microvitec 1441	£433.92 £499
Taxankaga Vision III	
BBC/APPLE/IBM	£326.09 £375

DISK DRIVES




100K 40T	£86.09
	+ VAT = £99*
	ex VAT inc VAT
Single	
100K ALPS 40T	£86.10 £99*
100K Chicon 40T OPUS	£112.17 £129
200K Sanyo 3 OPUS	£130.43 £150
400K Mitsubishi	
40/80T OPUS	£152.17 £175
Double	
800K Mitsubishi	
40/80T OPUS	£320.87 £369

All our Disc Drives come complete with:

2 Year guarantee
Disc Formatter
Disc Verifier
Screen Dump Program for Epsens
Information program on DFS commands

All cables required for connection to BBC
Disc and DFS handbook
Dual Disc Drives include power supply
Power supply available for single Drives
Single Drives available in dual drive cases

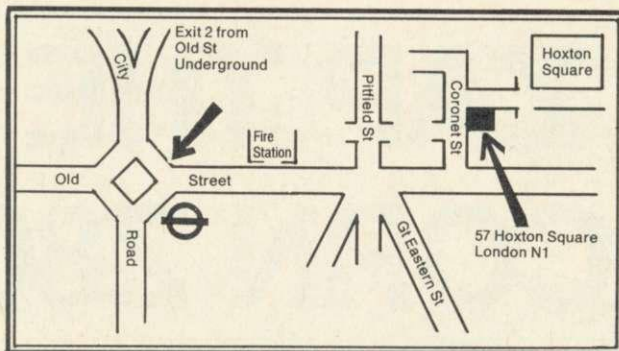


ACCESS & BARCLAYCARD WELCOME

Prices shown are correct at time of going to press in FEBRUARY

*LIMITED OFFER WHILE STOCKS LAST. MAIL AND PHONE ORDERS ACCEPTED
Carriage—add £10 for Hardware and £1.50 for Software

OPEN 9-6 Monday to Saturday
57 Hoxton Square, London N1
Tel: 01-729 1778

DISK INTERFACES




Acorn DFS	ex VAT inc VAT
	£84.35 £97
NEW Acorn DNFS kit	£89.57 £103
(ring for availability)	

MODEMS

Selection of Acoustic Couplers and Mini Modems in stock.

Minor Miracle WS2000	ex VAT inc VAT
	£129.57 £149

DOT MATRIX




Epson RX80 F/T	£213.04
	+ VAT = £245

Ring for details of NLQ option

	ex VAT inc VAT
KDC FT 5001 (Epson Comp)	£203.49 £234
Epson RX80	£192.17 £221
Epson RX80 F/T + Kaga Taxan 810 (NLQ)	£213.04 £245
	£277.39 £319
Kaga Taxan 910 (NLQ 132 col)	£346.96 £399

DAISYWHEEL

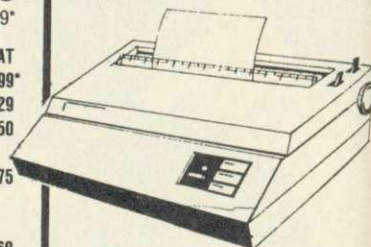

Juki 6100	£329.75
	+ VAT = £379

	ex VAT inc VAT
Juki 6100	£329.75 £379
Daisy Step 2000	£230.43 £265
Uchida DWX305	£230.43 £265

Serial Interface Conversions

(fitted free)	
8143—Epson	£26.10 £30
8148—Epson (2k buffer XON/XOFF protocol)	£56.53 £65
KDC	£56.33 £65
Daisystep	£60.88 £70
Canon	£69.58 £80
JUKI	£47.84 £55
BBC cables from	£10.44 £12
QL Centronix cable	£33.91 £39

VARIOUS

	ex VAT inc VAT
Torch Ext. Processor + Software	£260.00 £299
Torch Ext Processor + twin drives	£699*
Computer Concepts ROMS from	£27.84 £32
Acorn Business Software	£20.88 £24.95
Acorn Data recorder	£27.84 £32
Opus Desk Model 10 with draw	£130.44 £150
Desk Stacking Unit (Lockable version available)	£20.00 £23

CPN is a trademark of Torch Computers Ltd. Perfect Software is a trademark of Perfect Software Inc. CP/M is a trademark of Digital Research Inc. IBM is the registered trademark of International Business Machines.

microFAST

THE EXPERTS

inside of the micro's case by means of three self-adhesive plastic clips. The best way of positioning it is to slide the clips onto it and connect the cable to the Tube socket; you can then decide on its final position before sticking the pads to the top of the case. Once it's fitted, you have to take care when lifting the lid off your micro, as this is now attached to the bottom by the Zep 100 cable.

Although the installation is a bit fiddly, the final arrangement is satisfactory and means that your micro is still contained in one unit. The only other attachment to the micro is the insertion of the MCP chip. This takes over the MOS functions of your micro at switch-on and provides a CP/M-compatible environment for the software to work in. You'll still need an Acorn disc interface, and you can switch back to run standard Beeb software by performing a B-Break break (holding the 'B' key down while pressing Break, and then pressing Break on its own).

The MCP provides quite a few functions of its own, and these are documented in the Zep 100 user guide. This is the thinnest of the five manuals supplied with the package, and details each of the functions on a separate page, giving examples of syntax. The built-in functions include copying Torch-format discs, handling the screen display (changing colours, etc) and printing the time from the real-time clock.

SUPPLIERS

Torch Computers

Abberley House, Great Shelford,
Cambridge CB2 5LQ.
Tel: (0223) 841000

Acorn Computers

Fulbourn Road, Cherry Hinton,
Cambridge CB1 4JN.
Tel: (0223) 245200.

This manual also covers the utilities supplied separately on disc, and these include a font generator, a monitor, an RS423 comms routine, disc-map utilities and a music editor. Three excellent music files are included on the disc and the music editor represents one of the few attempts I've heard to put feeling into a micro-generated tune. I've tried most of the utilities and they seem commendably versatile and reasonably robust. The manual could offer a bit more detail of some of them, however.

The three business software packages supplied with the Zep 100 are produced by the Perfect Software Corporation of the US. With names like *Perfect Writer*, *Perfect Filer* and *Perfect Calc* they really are asking for it, but the



The alternative Z80: Torch's Zep 100 plus dual disc pack and business software packages

ACORN AND TORCH SYSTEMS COMPARED

	Prices (inc VAT)	Bundled software	Additional products
Zep 100	£343.85	Perfect Writer, Perfect Filer, Perfect Calc, Z80 Basic	Unicorn hardware range Range of Torch formatted software
ZDP 240 (Zep 100 plus Torch twin floppy disc pack)	£803.85		
Acorn Z80	£399.00	FilePlan, GraphPlan, MemoPlan, Accountant, Nucleus, CIS Cobol, professional Basic, Z80 Basic	Range of Acorn formatted software
Acorn Z80 plus BBC disc pack	£868.00		

packages, while not living up to their names, are certainly high-quality products. *Perfect Writer* distinguishes itself by coming complete with its own spelling checker – yes, *Perfect Speller*. This wordprocessor is a sophisticated beast and, as with most things sophisticated, needs quite a bit of use before you appreciate all its features. It works on an 80 by 30 screen, the bottom two lines being reserved for system status and command input. Entry is by CTRL or Escape sequences, although Torch has patched in a few commands on the function keys.

Torch maintains that most CP/M users will be used to using these sequences from other machines and that they are compatible with the company's larger micros. With a product such as a second processor, however, the user is more likely to have moved up from a 'straight' BBC micro than across from another CP/M machine, and will probably have been brought up on the function keys used by *Wordwise* or *View*.

Perfect Writer maintains a swap file and saves the text every few hundred characters you enter – useful if you lose mains power for any reason, as most of your file will remain intact. The pro-

gram can hold up to seven documents in memory at once, and you can work on any two of these in variably sized screen windows. Text can be transferred from one document to the other and the working documents swapped in and out at will.

The system offers the useful facility of pre-formatted 'environments' in which commonly needed formats are set up with a single command. These include Lists, Verse and Quotations. Each environment can be modified from the default values set. The program can also maintain an index and footnotes to your text and will update them appropriately when you insert new text into a document.

Perfect Speller does what a spelling checker should, although with a distinct American accent. All *Writer's* and *Speller's* actions are carried out pretty speedily – certainly no slower than using *View* – and this is quite an achievement when you consider the Benchtest timings for the Zep 100 (AU, January '85).

Perfect Filer, the database of the suite, is again an extensive program. A database created with it may fill a complete disc – that is, a CP/M disc, which is two disc surfaces on a double-sided

disc. Within that 400k of disc space you may have as many records as you can fit, and each of these may have up to 70 fields and a total of 1024 data characters. Two predefined files are provided on the *Perfect Filer* disc, one for handling a club membership file and the other for an address list. These files are useful for learning how to use the system and for simple filing tasks, but you will probably want to set up files specific to your requirements.

As with *Perfect Writer*, control is via CTRL sequences, although there are fewer to memorise. Setting up the record format is easy as the screen designer allows complete freedom to position fields and their titles anywhere within the record display. The designer is further simplified by the provision of a number of standard field 'templates'. In a similar way to the environments within *Perfect Writer*, *Perfect Filer* provides a standard format for a data field, a name field, an address field and many others. The program has been Anglicised, so there are no problems with zip codes or inverted dates.

Field types may be alphabetic, alphanumeric, numeric or status. A status field is used for single-character entries such as Yes/No answers. Each field must have a tag name, which is used within the record description, and *Perfect Filer* provides a reserved tag for automatically updating a date entry. The finished record can be edited, as long as no data has been entered on the file.

Sorting is carried out using a system of key fields, which are defined when the file is set up. Any number of fields may be defined as keys. A subset of the file may be set up by selectively searching through the database, and may be saved separately to disc. The information in the database may be printed out in a variety of ways, and *Perfect Filer* offers comprehensive facilities to define 'lists' containing these formats. Standard letters produced using *Perfect Writer* may be merged with data from *Perfect Filer*.

The manual takes the form of a series of tutorials and, like the other Perfect Software documentation, is bulky and fairly thorough. None of the manuals includes a precise specification of the capabilities of the software, but each comes with a quick-reference card showing the control key sequences.

Perfect Calc uses overlays and virtual memory techniques allow a spreadsheet of up to 64k to be processed at a time. A sheet containing up to 52 columns by 255 rows can theoretically be created, but you would have room for only the most trivial formulae on a model this size. The width of columns may be adjusted individually

or throughout the model and you can flick through the sheet a row, column or screen 'page' at a time. All the usual controls are provided for manipulating the data in the model, and many of the control sequences are similar to those in *Perfect Writer*.

Formulae may use logical, arithmetic, statistical and trigonometrical functions, and calculation can be ordered by column or row. As with *Perfect Writer*, up to seven spreadsheets may be held in memory at a time and



the screen may be split to display sections of any two of them simultaneously. No graphics facility is included with *Perfect Calc*, but comprehensive formatting facilities to print the information detailed in a model are provided.

The remaining piece of software included with the Zep 100 is Z80 Basic. This is a later version of the interpreter supplied with the Acorn Z80 package and is written by R T Russell, to whom I touch my forelock. There aren't many

people capable of writing a Basic interpreter, and fewer who can take an existing dialect with all the constraints that this imposes and convert it for a different processor.

This Basic is probably as close to the original 6502 version as is possible, and includes a built-in Z80 assembler. It is so well put together that a program written in 6502 Basic can be read into the machine, using one of the disc utilities supplied, and converted directly to run on the second processor. I succeeded in doing this with a couple of programs. Any sections of assembler are, of course, not converted.

The manual for Z80 Basic is thicker than any of the Perfect manuals, and this reflects the amount of information provided. It is good to have one piece of software at the end of an upgrade like this with which you can feel completely at home.

Since the Torch Z80 has been around for longer than the Acorn product, there's a large catalogue of CP/M software available on Torch format discs. This includes accounting packages, communications software (although networking routines are included in the MCP ROM), business graphics and a number of languages, as well as many alternative wordprocessors, databases and spreadsheets such as the league leaders *Wordstar* and *dBase II*. In all there are more than 120 titles. Should you buy the Torch Zep 100 in preference to the Acorn product? It really depends on what you want from your system. The Torch processor has been shown to be slower than the Acorn's Z80 system and the handling of the Tube is less sophisticated. However, when it comes to running applications software it doesn't seem to make a lot of difference. It may also be convenient for you to have the processor installed inside the micro's case.


Where the Acorn product scores is in the amount of bundled software supplied. If you feel you will make much use of *Cobol*, *Nucleus* or *Accountant* it will almost certainly be cheaper for you to go for the Acorn (CIS Cobol alone costs £425 on the Torch). If you will make good use only of a wordprocessor, database or spreadsheet then the Perfect products are well ahead of the Chang Labs packages offered with the Acorn unit.

Both contenders for the Z80 second processor market have a lot going for them and it is always good to have a choice.


TORCH USER GROUP

Sidelight

69 The Avenue, Wembley, Middlesex.

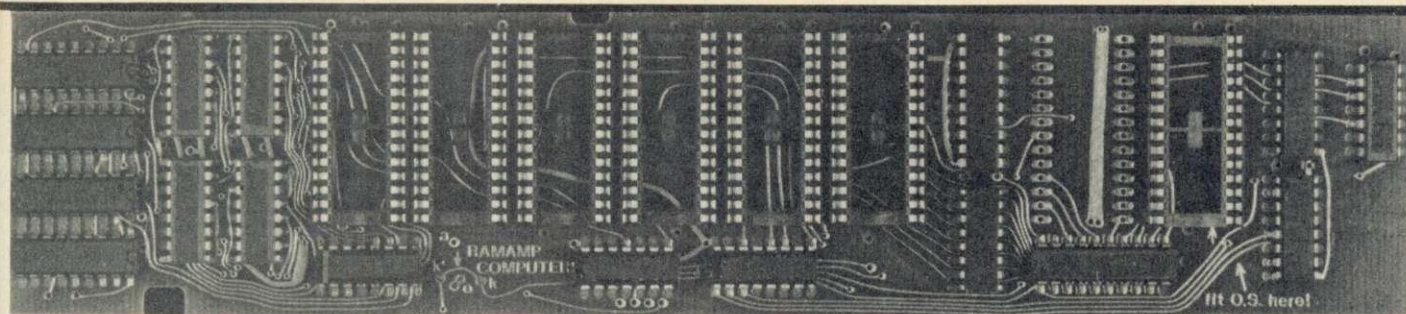


SIDEWAYS RAM/ROM



complete with
ram in the
price!

6 SLOT ROM + 16K RAM *	£56:00
6 SLOT ROM + 32K RAM *	£67:00
16K RAM only * *	£39:00
6 SLOT ROM board	£29:00
EXTERNAL ROM BOX	£39:00

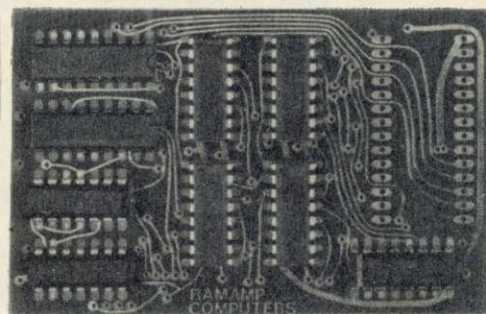

All boards fit underneath the keyboard and therefore does not cover RAM area which causes overheating. All boards fully buffered. No soldering required, no wires stuffed into CPU or VIA bases. No bits of the I.O. port used. Basic has priority if you wish. Write protect can be added. We do not sell RAM boards with no RAM in it. Prices include RAM, postage and VAT!

* FREE software to operate these boards. Send tape with order.

* * The 16K RAM board is the IDEAL board for ECONET systems for schools and universities. No soldering. Just plug in into ANY ROM slot and go. One can *LOAD "FILENAME" 8000 direct from disc without setting &FE60:&FF etc. etc. with this board. Educational discount on quantities. Viz. 10% or 15% if cheque sent with official order. Send SAE for more details. All products available at TWILLSTAR Or D.A. COMPUTERS: LEICESTER.

Open 9AM-10PM. 7 DAYS a WEEK.

RAMAMP COMPUTERS

25, AVON DRIVE, WHETSTONE, LEICESTER.
TEL. 0533 - 864966.

Technical enquiries: Phone between 7pm-10pm

**Suddenly,
quality plotting
is within reach of
every computer user...**

Penman is an entirely new concept in plotting. It is robotic, working almost like the human hand to draw smooth curves, perfect circles and dead straight lines... without 'staircases'. Penman is simple, reliable, very compact and truly portable; yet can plot on any size paper, on any smooth horizontal surface. Use Penman at work, at home and at school... as a printer, robot, mouse and desktop plotter for BASIC and logo. Use it for design, or to produce graphs from spread-

sheets, scribe captions and notices. The only limit is your imagination. For less than £300, Penman brings quality plotting to every computer user.


PENMAN

Penman Products Limited
8 Hazelwood Close, Dominion Way,
Worthing, W. Sussex BN14 8NP.
Tel: (0903) 209081 Telex: 946250

QUALITY IN PRINT

Low Prices

Top Service

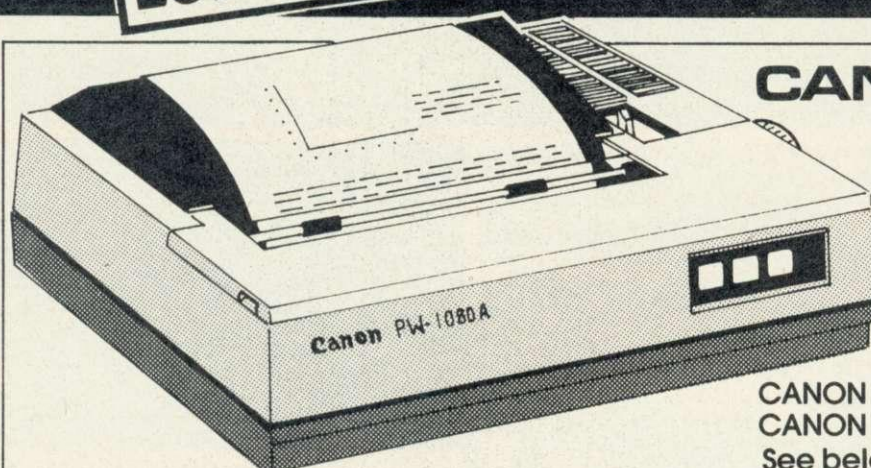

CANON PW-1080A

NEAR LETTER QUALITY PRINTER

NLQ Mode 23 x 18 Matrix: 27 cps
Draft Mode 11 x 9 Matrix: 160 cps
Full range of Epson FX 80 Print Codes
Friction & Tractor Feed
Centronics Interface Standard
CANON PW-1156A Available
(Accepts 15" Paper)

CANON PW-1080A £278.26 + VAT = £320.00

CANON PW-1156A £360.00 + VAT = £414.00

See below for Printerpack prices

C.J.E. MICRO'S BBC PRINTERPACKS

For Star, Canon & Juki Printers include:

1. The Printer
2. 24 Hour Delivery
3. Cable to the BBC 1.3 Metres
4. Screen Dump Program (M/C Source)
5. Text Dump Program
6. Function Key set up Program. For use with WORDWISE
7. Function Key Label Printing Program. For use with above.
8. VIEW Printer Driver
9. 100 Sheets of Paper
10. Mains Plug with 3 Amp Fuse
11. Booklet giving details of using the printer with a BBC.
12. Character Defining Program for Downloadable-character-set

CANON PW-1080A C.J.E. PRINTER PACK £345 Inc. VAT


CANON PW-1156A C.J.E. PRINTER PACK £439 Inc. VAT

JUKI 6100 CJE PRINTER PACK £400 Inc. VAT

GEMINI 10X CJE PRINTER PACK £255 Inc. VAT

**CJE MICRO'S
BBC PRINTERPACKS**


**PRINTER CABLES/INTERFACES FOR
MOST COMPUTERS STOCKED**

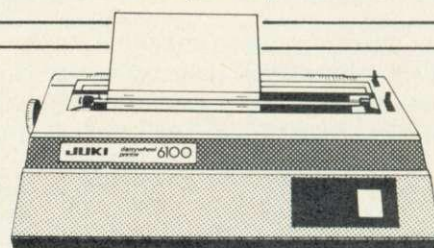

JUKI 6100

One Year Warranty
20 CPS: BiDirectional & Logic Seeking
10, 12, 15 & Proportional Spacing
Wordstar Compatible
2K Buffer: 13 Inch Platen
Underline: Backspace + Lots more
Centronics Interface Standard
RS 232 Interface £54.00 + VAT Extra
Tractor Feed £119 + VAT Extra
Single Sheet Feeder £199 + VAT Extra
JUKI 6100 £330.43 + VAT = £380.00
See left for Printerpack prices

**JUKI 6300: 40CPS:
NOW IN STOCK**

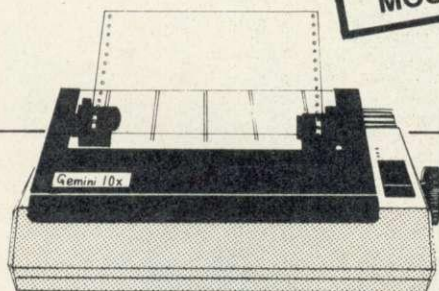

STAR GEMINI 10X

One Year Warranty
True Descenders 9 x 9 Matrix
120 CPS Bidirectional & Logic Seeking
40, 48, 68, 80, 96, 136 cpl
Italics, Emphasized, Double strike
Super & Sub Scripts
Downloadable Character Set
Hi-Resolution & Block Graphics
Friction or Tractor Feed
10X 10" Carriage, 15X 15" Carriage
See above for Printerpack prices

Centronics Interface Standard
RS232 Int. £52.00 + VAT Extra
GEMINI 10X £235.00 Inc. VAT
GEMINI 15X £380.00 Inc. VAT

STAR DELTA 10

spec. AS FOR 10X PLUS:—
160CPS: 8K BUFFER
CENTRONICS + RS232 INT'S STD
£311.30 + VAT = £358.00

SPECIAL RS 232 PRINTER BARGAIN

STAR DP8480 (8" Printing) £187.00 Inc VAT
Ideal for BBC/Newbrain/HX20 & Spectrum Int. 1
Phone for full specification

OFFICIAL ACORN APPROVED DEALER

PRINTAID

Powerful UTILITY for BBC word processors.
Mail Merging.
Easy entry of printer control codes.

Capability for proportional spacing with right-hand justification on Juki 6100
40 or 80 track. £16.00
Send or ring for details.

EXPORT ORDERS WELCOME

VAT INCLUDED WHERE APPLICABLE
PHONE/CREDIT CARD ORDERS WELCOME
Postage 50p per order or as stated
Next day Delivery for Printers/Disk Drives £8.00
FULL RANGE OF CONNECTORS & CABLES AVAILABLE
PRICE LIST ON REQUEST

**RING FOR SAMPLE PRINTOUT,
FULL SPECIFICATIONS
& LATEST PRICES**


CJE micro's

Dept AU, 78 Brighton Road, Worthing
W. Sussex BN11 2EN (0903) 213900

Access a world of Information WITH YOUR BBC MICRO

Today, there are literally hundreds of databases worldwide which can be accessed by your BBC micro. These include Prestel, Micronet, Homelink, Telecom Gold, various 'Bulletin Boards' and massive American data bases such as 'The Source' and 'DIALOG'. The equipment can also be used to send telex messages. The Pace range of inexpensive communications products are designed to provide accurate data exchange whilst being extremely flexible and easy to use.

NIGHTINGALE - The Modem

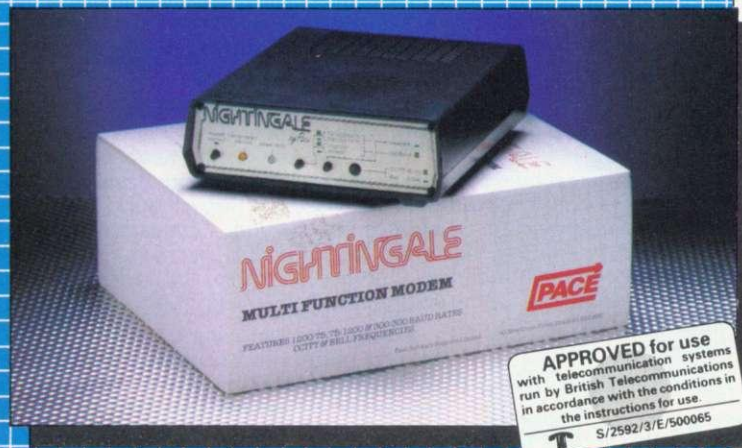

In order to use a versatile modem like Nightingale to its fullest potential, you will require equally sophisticated software. This is where Pace can offer you a total solution — Commstar, unquestionably the most comprehensive communications software available for the BBC. Commstar is currently the only package for the BBC micro which offers easy access to Prestel (and other viewdata services), together with user to user communication and exceptional file transfer capabilities.

Supplied on Eprom, Commstar is instantly accessible, simple to use and extremely flexible. Just look at the possibilities: - access Prestel, Micronet, Viewfax, Homelink and Telecom Gold, rummage through bulletin boards and chat to literally thousands of other computer users, but there's more. Commstar's versatility enables the BBC to be used as an inexpensive work station for a main frame or mini-computer.

The complete Nightingale/Commstar package for the BBC micro including the modem, cabling and the Commstar Eprom and manual is just £139 plus V.A.T.

Nightingale is available separately for the BBC and other computers at £119 plus V.A.T. and Commstar is £29.57 plus V.A.T. Further details are available, please telephone or write for comprehensive fact sheets.


Nightingale is by far the most versatile modem available, at the price, for either home or business use. It offers Prestel/Viewdata baud rates (1200/75 & 75/1200) alongside 300/300 baud full duplex for communication between the BBC and other computers, including bulletin boards.

Nightingale has a built-in expansion capability, allowing the addition of auto-answer and auto-dial with battery back-up. The state-of-the-art modem chip technology employed in Nightingale requires minimal support circuitry resulting in low power consumption, low cost, high quality and extreme reliability.

Nightingale being 'hard wired' is not subject to the noise interference errors common to outdated acoustically coupled devices. In addition Nightingale features a simple self-test facility for easy installation.

Nightingale utilises a fully buffered RS 423/232 serial interface and is supplied complete with a lead suitable for connection to the BBC micro, other leads are available on request.

COMMSTAR - The Software

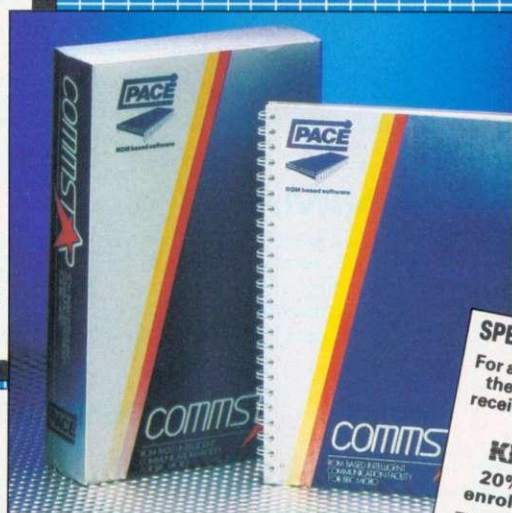

SPECIAL INTRODUCTORY OFFER
For a limited period, when you order the Nightingale modem you will receive discount vouchers entitling you to the following:-

KNOWLEDGE-INDEX
20% discount off standard enrolment fee (normally £25)

This remarkable collection of databases includes over 22,000,000 items covering Agriculture, Books, Business, Electronics and Computing, Corporate and Company News, Education, Engineering, Magazine Articles, Mathematics, Medicine and News/Current Affairs (The enrolment fee also includes 2 hours of free access time).

one to one
50% discount off standard enrolment fee (normally £50)

One to one is an electronic message service designed to give you the communications capabilities of a telex at much lower cost. By using your micro fitted with a Nightingale modem you can produce telexes, letters, reports and contracts, and send them in seconds to any destination. Courier delivery, priority mail and radio paging are also included in this highly efficient communications service.

PACE

**PACE, 92 NEW CROSS STREET,
BRADFORD. BD5 8BS
Tel. (0274) 729306 Telex 51564**

"Bringing tomorrow a little closer"





POWERFUL NEW ROMS FOR THE BBC

Never before has there been
such a range of powerful but
easy to use ROMS for the
BBC

ENIGMA DISC IMAGER

Enigma Disc Imager is a 16K ROM which will give you 29 additional powerful disc commands. Some of which are: Enigma will IMAGE ANY DISC, Copy sectors, Repair bad tracks, Read deleted or special sectors, Dumps roms to disc, Loads roms from disc to sideways ram, Moves a programme up or down in memory, Unlocks locked tapes, Locks your tapes, Dumps cassette to disc, Global or selective renaming of directories, Writes deleted or special sectors to disc, Track and sector ID editor facilities, Selective file copier, Formats discs to be 40/80 track compatible (requires an 80 track drive with this command), Special disc editor to cope with protected discs, Special formatter to format discs with non standard tracks, Inserts new files into the catalogue, Enigma makes easy work of editing, copying, repairing, etc., of both standard and non standard discs.

ENIGMA DISC IMAGER IS TUBE COMPATIBLE ALTRA PROBE

Altra Probe is a 16K ROM which will give you 59 additional powerful machine commands. Some of which are: Altra Probe will list a basic programme straight from file, Formats basic assembler text output, Disassembles, Unpacks, Super Packs, Relocates, Edits memory, Switches off roms, Lists roms, Copies roms to specified address. Calculates free memory, Copies screen text to printer, Lists all specific types of basic variables and values, Graphics dump for Epson or NEC printers, Calculates and details free space on a disc, On board formatter which will automatically format a dual disc, Onboard formatter and verifier. Repairs bad tracks, Disc sector editor, Turns the tube on and off. These are only a few of the commands available from Altra Probe. Altra Probe makes easy work of editing, programme development, etc.

Altra Probe is available in two versions. PROBE 1 and PROBE 2

ALTRA PROBE 2 IS TUBE COMPATIBLE BASIC ED

Basic Ed. is on 8K ROM which contains 21 additional commands. They are: \$ search, List matches, Number matches, Global replace, Selective replace, Bad programme relink, Copy lines from one part of a programme to another, Format a listing, Move, Super pack, Renumber, Table line references, Unpack, Variables X ref, List entire programme, Keyboard immediate mode, Printer on/off, Paged mode on/off, List match lines, Concatenate, Strips rem, spaces etc. Altra Basic Ed. is an essential helpful tool for the Basic / Assembler programmer. Altra Basic Ed. is available in two versions. Basic Ed. 1 and Basic Ed. 2.

ALTRA BASIC ED. 2 IS TUBE COMPATIBLE FIRST AID 1.1

First Aid 1.1 is an 8K ROM which contains 19 additional commands. They are: Machine code disassembler, Hex and ASCII dump, Sideways rom to ram copier, Function key predefined facilities, Variable table listing, Memory space free calculator, Checksum calculator, Rom lister, String search, Define function keys with strings, Rem and space Stripper, Bad programme fixer, Clear all variables, Clear ram from &0400 to &8000, Machine code monitor, First Aid 1.1 as a language, Lists O.S. calls with their vectors, Lists the first 24 control codes. Altra First Aid 1.1 was designed to assist the Basic / Assembler programmer and the sideways rom user.

PICTURE ANIMATOR

Picture Animator is a mode 7 disc based high quality text and picture editor which lets you compose very sophisticated moving pictures. An ideal tool for the person who wishes to exploit the BBC micros teletex mode. The software is easy to use and your work can be saved to tape or disc.

MUSIC MAESTRO

Music Maestro is a superior and comprehensive disc based sound and music composer. All the sound facilities in the BBC are Utilised. Envelope composition is displayed graphically to assist you in determining the wave form required. Almost any musical instruments voice can be created and reproduced from the BBC. Music Maestro is simple to use and will save your symphony or tune to cassette or disc.



☐ I enclose my order for the above products.

☐ Please send information sheet on _____ S.A.E. enclosed

Name _____

Address _____

Telephone orders please ring: 0532 451508

Send order to: ALTRA ROMS, 209 North Street,
Leeds LS7 2AA.

Please send me:

PICTURE ANIMATOR _____ @ £19.00

MUSIC MAESTRO _____ @ £19.00

E.D.I. _____ @ £49.00

PROBE 1 _____ @ £49.00

PROBE 2 _____ @ £59.00

F/AID 1.1 _____ @ £25.00

BASIC-ED _____ @ £29.00

BASIC-ED 2 _____ @ £35.00

I enclose the sum of _____ TOTAL £ _____

Cheque, P.O. or Credit Card Number _____

Mix 'n' match words and pictures on your BBC Micro with Edfax

ONE OF THE TOP TEN
EDUCATIONAL
PROGRAMS OF 1984*

ONLY
£ **19.95** (inc. P&P)
(Plus £1.71 VAT)

Edfax is a software simulation of a teletext system (Ceefax or Oracle). Wherever access to information is needed, Edfax provides an exciting and stimulating aid.

SUCCEEDED BRILLIANTLY

Jacquetta Megarry, writing in the Times Educational Supplement, wrote:

"The Edfax team have succeeded brilliantly: they have not only provided the software, but also backed it up with first-rate documentation and educational support... a most accessible and likeable piece of software, thoroughly pilot-tested and thoughtfully presented."

WHAT THE EXPERTS SAY

Other reviewers have been equally enthusiastic:

"...there was no holding the children..."

Edfax is a most compelling activity."

Ken Dyson, Inspector (Computer Education), Nottinghamshire.

"A happy coming together of science, art and English." John McGill, Head of English, Sturton by Stow School, in Teaching English.

"It presents a creative medium that can really be used to explore electronic communication." Educational Computing, June 1984

"Imagine how easy it is to update news or publicity material about your school activities." Primary Teaching Micros, July 1984

"The possible applications for Edfax are limited only by the imagination of the user..." Acorn User, July 1984

* In January 1985, Educational Computing, choosing from 1,500 educational programs, placed Edfax in its Top 10 programs of 1984.

EDFAX HAS SO MANY USES

Edfax is ideal for projects like electronic magazines, exhibition notice boards and home data bases. Computer dealers have used them to create software catalogues; schools have created displays of students work for open days; libraries have created information systems; art classes have explored computer graphics; children have illustrated stories and history projects.

The program comes with an 80-page sample database, giving examples of childrens work. You will see that Edfax is entirely content free and can be used right across the curriculum, or at home for recreational purposes. Edfax pages can consist of words, numbers, diagrams, tables, pictures - and a mixture of these.



SUPER FEATURES

- The powerful EDIT program allows you to implement all the features of a teletext system, including coloured text and graphics, double height text, flash, conceal/reveal and speedy updates of news pages.

- The program comes in 40-track and 80-track versions, with room for 182 pages of information on the 80-track version. You can build up a collection of disks covering a whole variety of topics.



- Having created your information pages, the DISPLAY program enables any page, or sequence of pages, to be recalled, simply by entering a three-digit page number. Users simply follow the instructions you provide to find their way through the database.

- The cycle page facility enables you to create automatic displays, with variable time delays between the pages. All the pictures on this page were created by schoolchildren using Edfax.

FIRST RATE PACKAGE

Parents and teachers will be delighted with the Edfax documentation. This consists of an illustrated 80-page book, in two colours, fitting with the disk into a stout PVC wallet.

A coloured key-strip and screen planning sheet are also included.

The educational thinking behind the disk represents the fruit of extensive school trials co-ordinated by the Microelectronics Education Program (MEP). Edfax was developed by the MEP and is regarded as one of its most significant contributions to educational software development.

FURTHER SAVINGS TO BE MADE

For example: **Classroom Pack.**

Buy five Edfax packs and pay only **£11.99 each.**

Total price - £59.95 + VAT for five. For further details of this and other savings, write to Tecmedia or telephone (0509) 230248 today.

TRADE ENQUIRIES WELCOME

Edfax

Tecmedia Ltd., 5 Granby St., Loughborough, Leics. LE11 3DU.

To: Edfax Offer, Tecmedia Ltd., 5 Granby St., Loughborough, Leics. LE11 3DU.

Please send me _____ Edfax pack(s) at £21.66 (inc. £1.71 VAT) each.
I enclose postal order / cheque for £ _____
made payable to Tecmedia or please debit my Access/Visa credit card ☐

No. _____

Signature _____

Mr/Mrs/Miss _____
(BLOCK CAPITALS PLEASE)

Address _____

Post Code _____

Delivery subject to availability.

UK Excl. Channel Islands AU1

A CHOICE OF 3 DATA BASES!

FROM BEL TECH

ALL FILES ARE COMPATIBLE
WITH BEL CHARTS, BEL PLOT and BEL GRAPH

ALL MENU DRIVEN AND EASY TO USE,
YET POWERFUL !!

Mailshot

Use mainly for Names, Addresses etc. although up to 20 Fields are available with 480 characters/record and 600 Records/File or 90K characters on Random Access Disc Version. (14K Characters/File on Tape).

Default Values can be set (alpha or numeric) and amended and the Names and Types of each Field can be changed.

Selective and Global Editing of both Fields and Records with a search for any string/character on any Field.

There are both Find/Display and Browse options with the facility to print individual Records. Any Record can be Deleted/Replaced.

Disc Drives can be selected (0 to 3).

Sorts (Ascending/Descending) can be conducted on any Field as can Searches (<, >, < >, =, >=, <=) whether the Fields are printed/displayed or not.

Printer Control Codes can be sent.

Print up to 8 Fields Across or Down.

Label Printing (std., non-std, 1, 2, 3 across).

Bel Base

All of the facilities above PLUS:

Calculation Options. — Calculate the value of a Field from others — enter Functions etc. Specify decimal places.

Format your own Report with as many Fields as can be fitted into print width (max. 137 characters). Numeric Fields can be summed.

Print Formats can be saved for future use with new data.

Bel Base 2 (Disc Only)

The NEW Super Database Manager with EXTENSIVE FACILITIES

All of the facilities above PLUS:

Configuration Option allows easy selection of Disc Drives, File Names, Sort Fields etc.

Record size increased to 1200 characters and up to 2400 Records/File! Extension Files can take File beyond capacity of one side of Disc!


Minimum keystrokes are needed and extensive use is made of Function Keys.

Re-Calculate Option as per spreadsheet.

Mail Merge, Creation of Sub-files, Date Fields added to all of BEL BASE facilities.

Sort/Search on up to 3 Fields (change them at any time).

AND, OR, NOT Operators added.

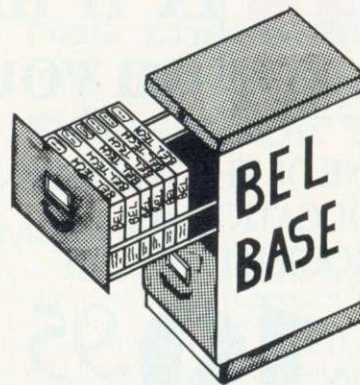

Order Form	TAPE	DISC	TOTAL
	QTY	QTY	
BEL BASE	16.00	18.00	
BEL BASE 2	N/A	27.00	
BEL CHARTS	16.00	17.00	
BEL CHEM Chemistry 1	9.50	11.50	
Chemistry 2	9.50	11.50	
BEL GEN Genealogy	15.00	23.00	
BEL GRAPH	25.00	27.00	
BEL PLOT	16.00	17.00	
BEL SUBS	14.00	15.00	
MAILSHOT	9.50	11.50	

TOTAL inc. P. & P. £

NAME _____

ADDRESS _____

COMPUTER TYPE _____ MODEL _____

DISC (if applic.) _____

CREDIT CARD No PAYMENT BY CHEQUE P.O. VISA ACCESS

Please Complete & Return to:-

BEL TECH Limited, College House,
St. Leonards Close, Bridgnorth,
Shropshire WV16 4EW

Telephone: 07462 5420 (24 Hrs.)

Muse hits the right notes

THREE exceptionally useful booklets at incredibly low prices have been made available by MUSE (Micro Users in Secondary Education). All were written by Richard D'Silva, a teacher at Bryanston School, Blandford, Dorset, as classroom notes, and as they are quite cheap (£1 per single copy and £7.50 for 10) they could serve as reference works for children to keep.

They deal with *Basic on the BBC Micro*, *Further Basic on the BBC Micro* and *Assembler on the BBC Micro - a beginner's guide*. The first *Basic* book covers such diverse topics as keyboard familiarity, variables, loops, graphics, sound, character definition, string functions and data. *Further Basic* continues with VDU commands, *FX, ASCII, procedures and functions, filing, indirection operators and sorting.

The *Assembler* introduction includes addresses, registers, two's complement and logical operators, in preparation for conditional branching, OSBYTE calls, immediate and direct addressing, OSWORD calls, two-pass assembly, indexed addressing and post-indexed indirect addressing - all in 30 pages!

In each book the material is divided up into tasks and activities, and the progression of ideas is simple and straightforward. As a cheap alternative to some of the ponderous tomes available at high prices at the moment these seem unbeatable value.

Contact MUSE Publications at PO Box 43, Hull HU1 2HD.

Commentary by
Nick Evans,
who welcomes
reader feedback



Microtext - 'crippled at birth' by licences

ACORNSOFT's *Microtext* is an authoring package designed to allow anybody with common sense and the ability to follow instructions to create their own teaching programs without using Basic. It comes on cassette and disc or in ROM, each with its own peculiarities and facilities.

Microtext is one of the languages being used in the Domesday Project to interface the BBC micro with a video-disc player and was reviewed in *AO* October 1984.

You may already know this - *Microtext* has featured in this column before - but you prob-

ably didn't know that *Microtext* programs can be run without the *Microtext* code resident in the machine... if you have the publishing system, that is. When used with *Microtext* files, this system allows them to be run as if in the normal *Microtext* mode, but without access to editing facilities.

This means, for example, that a school developing a program to be used in other schools could package the file, together with the publishing system, and distribute the ready-to-use program. There is, of course, a price to pay, and the scale of licensing fees

MICROTEXT LICENCES

Type A

In-house publishing. Provided the materials are to be used only in the educational establishment licensed, the rate depends on the number of computers available: 1-10, £30; 11-20, £45; 21-50, £65; 51-100, £100; 100-plus, £150.

Type B

Free distribution. This

applies to materials distributed to other establishments at no charge. Either £30 plus 50p per copy, or £200 plus 10p per copy.

Type C

Commercial publishing. All materials developed for commercial sale. Either £6000 plus 50p per copy, or £250 plus £5 per copy.


STOP PRESS

ACORN has agreed to extend its Micros in Schools scheme to readers of *Acorn User*. This gives discounts on BBC micros and Electrons with peripherals.

Write for details to *Acorn User* Education Offer, Acorn Customer Services, 645 Newmarket Road, Cambridge CB5 8PD. Tel: (0223) 210111.

is shown in the panel.

Now it may seem as if power has gone to Acornsoft's head. The company's record in the educational market early on was nothing to shout about so why, when it has a really worthwhile package, does it appear to be crippling it at birth? The answer is simple - Acornsoft is a mere intermediary between the consumer and the National Physical Laboratory, which developed the pro-

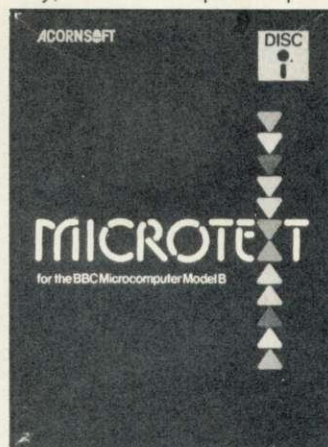

gram. NPL is calling the tune and, one suspects, even Acornsoft is not too happy.

As a publisher of vast amounts of software and associated materials you might not consider a £6000-plus licence fee exorbitant, covering as it does *everything* you publish from now on. However, the small school aiming to distribute materials free to other schools in its area is going to have trouble explaining away the seemingly pointless expenditure of £30 or even £200. And who foots the 'per copy' bill? If you unload that on the customer, the software is no longer free.

Inevitably, VAT has to be added to all the above charges.

More information from the Education Department Manager, Acornsoft, 104 Hills Road, Cambridge CB2 1LQ, tel: (0223) 316039.

Quicksilva brings music to the class

THE music classroom could well benefit from the interesting sounds and rhythmic variations available on the *Music Processor* and *Drumkit* packages from Quicksilva.

Three sets of data files are available for the synthesiser program, including Bach, carols and Sousa marches, and impressive they are too.

Actually creating the stuff is a little more complex. Multi-tracking is available in the tape-record simulator which

even allows you to fast-forward through the music. Tunes may be built up with a wide range of envelopes using all four of the micro's sound channels. All the parameters may be altered and the speed of the execution of the data file may also be controlled.

The *Drumkit* program is excellent for demonstrating basic rhythm sequences and allows the use of snare, bass drum, sticks, electro and metronome, with the ability to

stress any beat at will. Editing of the drum score is interactive while the program is running which means you hear the result as you change the parameters. Apart from being good fun it is also designed to be a serious instrument (although the sound system of the Beeb would need to be connected to a hi-fi).

Further details from Quicksilva, 13 Palmerston Road, Southampton SO1 1LL, tel: (0703) 20169.

Acorn take over where the government left off.

As you know, the highly successful D.T.I. 'Micros in Schools' scheme has now ended.

The good news is, however, that Acorn have stepped in to carry on the government's fine work with their own 'Micros in Schools' scheme.

This is an on-going programme to support all educational establishments in terms of advice, price and software reviews.

For instance, as an introduction to the scheme, we are enabling customers to purchase computing equipment at substantially reduced prices. This will operate through a specially chosen educational dealer network, enabling maximum support and advice on installation and peripherals.

There is more to the scheme than the generous price cuts. Acorn has launched an International Software Catalogue which indexes and describes over 500 selected educational programs.

Regional panels are being established to gain better feedback from educationists in the field and a special 'hot-line' has been introduced to enable major clients to discuss their plans directly with senior personnel in the company.


Third parties are joining the scheme too. First in was The Times' "Network for Schools" and Acorn are offering a £30 voucher towards new subscriptions. Microvitec are also discounting some of their range of monitors. More will follow.



If you'd like written information on this scheme, call 0223 210111 now.

'Approved' software list from Acorn

ACORN Computers has brought out a directory of 'approved' software called the *International Educational Software Catalogue*. International because Acorn intends to send the catalogues to the far corners of the world where software is, to say the least,

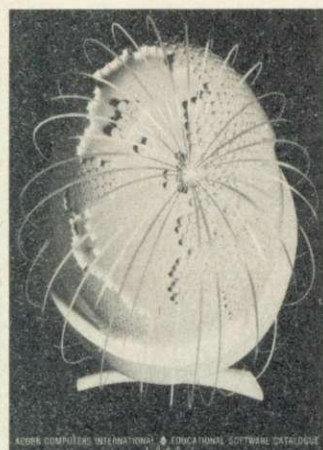

The £5 catalogue: 500 programs

rather hard to come by. But approved? By whom?

Well, by Acorn Computers, which has selected the software on the grounds that the materials fulfil 'general educational and technical' requirements. The company makes a neat disclaimer in the catalogue, however: 'Users of educational software often have widely differing criteria when judging the suitability of a particular software package... whilst every attempt has been made to thoroughly test the software, Acorn Computers... cannot be held etc...' This seems a wise thing to say in any recommendation one makes. Acorn also ask for comments on any of the listed titles. All of which brings up again the question: 'What is good software?'

Objectivity is not enough when considering software for a list. The old maxim about one man's meat applies. Acorn have tried hard to make a compilation of what is worth having and most of their suggestions suited my taste, although some good material has been left out.

The catalogue has been well thought out and contains lengthy descriptions of many

of the programs (500 are listed). Acorn and Acornsoft come first in the catalogue—simply because it's alphabetical (sorry, Aardvark). An excellent index enables the reader to see at a glance which age ranges are covered by the programs.

All this quality does not come cheaply, however, since this is not a sales catalogue. It costs £5 from Acorn Computers, Cherry Hinton, Cambridge.

Capital Media's low price programs out

CAPITAL Media, the publishing arm of MEP Capital Region, is publishing a wide range of software 'at the lowest possible price commensurate with a high standard of production and service'.

What makes this material interesting is that some of it has been developed under the guidance of Anita Straker (MEP primary co-ordinator) with documentation written by her. Two packages bear her

name: *Mathematical Games and Activities, Vol 1* and *Mathematical Investigations in the Classroom*.

The first contains six programs on disc for use by individual children or small groups without supervision in the 5-16 age-range. As the package costs only £6 to those outside the region and £5 to those in it, there seems little point in worrying about which is the heaviest area of program distribution in terms of age-range.

The second package contains 10 programs in which 'a practical activity is simulated and data is collected and tabulated so that children can discover general rules and develop "logical" strategies'. It costs £6 in the Capital Region, £8 elsewhere.

MICROSMILE

Also available from Capital is *Microsmile*, a package of 30 programs for the Beeb. Again, the age-range is wide and all the programs were developed by teachers working under the ILEA's SMILE maths project. *Microsmile* costs £15 outside Capital and £10 inside.


Capital Media is contactable c/o ILECC, John Ruskin Street, London SE5 0PQ.

Logo papers to help new users

AN interesting collection of unexpurgated papers on the subject of Logo has been made by Fred Daly of Homerton College, Cambridge. Called *The Homerton Logo Papers*, the collection deals with the experiences of members on a course run at the college for Logo users during the first part of 1984.

It provides an interesting insight not only for those using Logo already but for newcomers, as it deals with several versions of Logo and covers various applications, including the use of this language, Turtle, Dart, Bigtrak and primary Maths. Real grassroots stuff, this—and well worth the marked price of £3.

Bar code projects grow

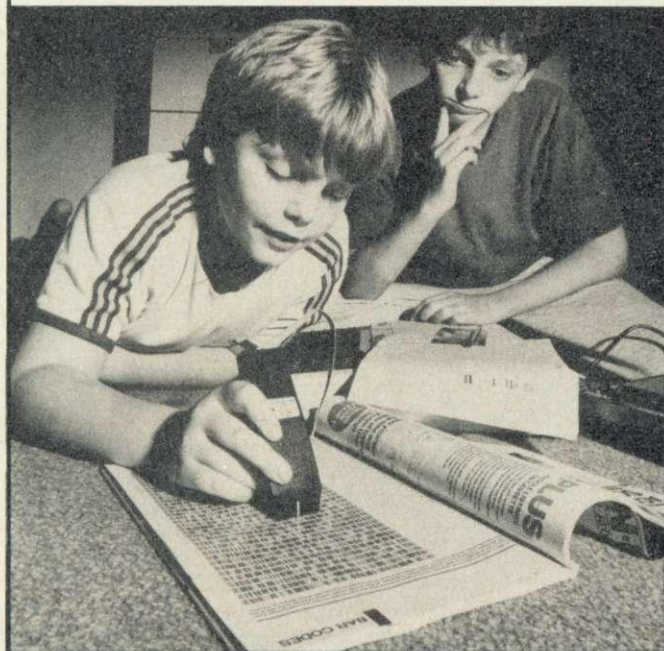

The MEP bar code reader is causing a stir in the education world where the variety and number of classroom applications is increasing all the time.

THE MEP bar code reader is the flavour of the month at the moment, not just in *Acorn User*, but in conversations between peripherals aficionados country-wide. I overheard one person say to a colleague: 'Yes, but what can you do with it?' The answer? 'You can do great lessons about bar codes!'

More seriously, several projects are under way at the moment, officially or unofficially, to develop materials

for the bar code reader. These include items on stock control, and, in Sheffield, an investigation into library and resource management using the system. Other ideas have been mooted on classification and organisation of all manner of materials and goods. If you have 'dabbled' and come up with a good application for the classroom that you would like to share with us drop a line to Education News.



REWRITE THE HIGH SCORE TABLES

So, you've got a BBC. You've also got enemies. With the Gunshot, you'll have all the opposition covering in corners. 8-directional action and an all-in-one moulded stem allows accurate annihilation and strength to survive those all-night sessions.

Dual fire buttons for fading fingers (and a rapid fire version when they're really coming thick and fast).

And, if you break it (and we know you'll try) our 12-month guarantee will prove invaluable. Only £8.95.

For the Gunshot, Vulcan's colour-coordinated, totally hardware BBC interface comes with a free tape which converts all keyboard software for joystick use. Exceptional value at £12.95, 12-month guarantee.

And, if you're a bit short of the readies, the Harrier is a tailor-made joystick which plugs directly into the BBC analogue port. Colour-coordinated and with a 12-month guarantee, only £10.95.

See the range of Vulcan joysticks and interfaces at your local stockist ... we'll see you on the high score tables.



VULCAN
ELECTRONICS LTD
Joystick Genius

200 Brent Street, Hendon,
London NW4 1BH. 01-203 6366


Whiz

quiz

'Answer Back - Senior Quiz', Kosmos, 1 Pilgrims Close, Harlington, Dunstable, Beds LU5 6LX, tel: (05255) 3942, £9.95 (cassette), £10.95 (disc)

THERE have been quizzes a plenty in the past, but this one contains a considerable number of questions - 750 - with a selection of 3000 answer options for use in a variety of ways: multiple choice; completing the answer; yes or no.

The quiz is presented in a space-age context with a robot zapping the question into the sky of a planet (or is it the moon?). The answers are then printed below ready for the user's selection. Correct answers are rewarded with an alien skimming across the screen. You can shoot him down by pressing the space bar at the appropriate point and he lands in the middle of a crater, accompanied by an explosion and the

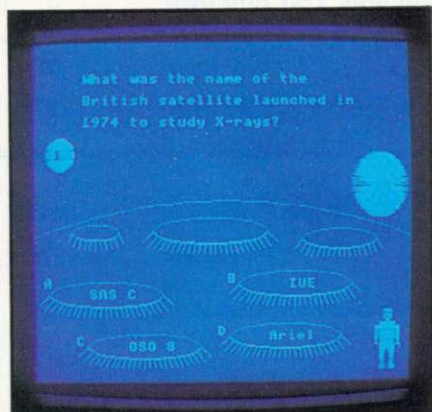


screen flashing - quite what this has to do with the quiz is never made clear! The user can opt to be timed and at the end of the run of questions - you select how many - the score and time are shown. You can then re-run the questions you passed on or answered incorrectly.

Perhaps the biggest bonus is that you can create your own quizzes and save them as data files for later use. This facility is useful for parents who want to encourage reluctant children to learn drab information but it does require a good deal of work to set it up. The main disadvantage of the program is the time it takes to get started if loading from tape - 10 minutes, with three loads required for the main program and a further file to be sought out and loaded for the data. The Break key can, of course, destroy all your hard work.

Nonetheless, it's a good package with a wide range of sensible questions. I must stress sensible, since so

many software companies seem to fill data files with the weirdest material nowadays. Good fun, fine graphics and an interesting range of topics.

Nick Evans

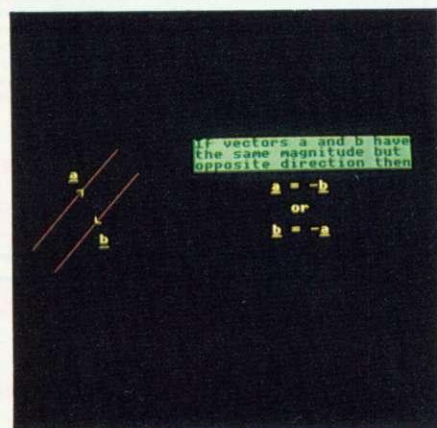

Precision

revision

'Vectors', Salamander Software, 17 Norfolk Road, Brighton BN1 3AA, tel: (0273) 771942, £14.95 (cassette)

SERIOUS software for the A-level student is pretty thin on the ground as most companies focus their attention on the primary market. So it's a pleasant change to find a detailed and comprehensive revision and tutorial work on a subject which causes many headaches in A-level and additional maths classrooms.

Vectors is a set of 14 programs which may be roughly divided into tutorial and testing. Each subject block is dealt with using graphic illustrations, animation where necessary and clear unambiguous text. It covers a wide range of topics under the vectors' umbrella including general principles, dot (scalar) product, ratios, three-dimensional vectors, the right-hand rule, the Cartesian equation and vector/plane intersection.

For ease of use each program leads into the next and you can choose in the end-menu either to re-run that section or chain the next one. The whole suite is easily transferable to disc although no menu is included. The handbook sets out clearly the objectives of each section and, within the programs themselves, it's not possible to progress until understanding of that section has been reached.

Well-written, well-presented and clearly produced by someone in education (a senior lecturer in maths), it's good value for money and an excellent revision aid for the student.

Nick Evans

Start making

sense

'Word Skill', Chalksoft, PO Box 49, Spalding, Lincs PE11 1NZ, tel: (0775) 69518, £12.25 (disc only)

WHAT excellent fun *Word Skill* is! An old and simple idea has been transformed into an addictive and amusing word game by Chalksoft, a company with a reputation for good educational software.

In some ways this program is a less serious version of *Developing Tray* (reviewed May 83), and in fact, would make a good introduction to it. Short phrases and sentences are presented on the screen with all letters replaced by dashes - except for capitals which are shown by stars. You must fill in all the spaces to reveal the sentence before your time limit is up. The quicker you do it the more points you score. There are facilities for entering your own text and playing with a friend.

A most peculiar element is included - the computer will, if instructed, randomly combine words into syntactically correct sentences which usually make no sense. It's great fun as well as good practice in spelling unexpected words.

The list of phrases (sensible ones) includes sayings, proverbs, quotations, misquotations and even foreign languages! The user can alter the speed level and the volume - the machine plays a selection of tunes when you are successful.

Teachers may be interested that the same set of phrases can be repeated to different members of a class with a



running set of the 30 most recent scores available for inspection. Pressing Break will not lose the program or the scores but will return the user to the main option menu.

All in all, an excellent piece of software with much potential for home and classroom applications.

Nick Evans

UVIPROM EPROM PROGRAMMER

Available from GROUND CONTROL to complement our fast selling UVIPAC EPROM eraser, is a low cost EPROM programmer for the BBC microcomputer which will enable the experienced user to program 2764 and 27128 EPROMS. The software available enables an EPROM to be programmed from disc, Sideways RAM (STL SWR compatible) or master EPROM. A disc drive is essential.

The unit, called the UVIPROM, is available in two versions, ie, UVIPROM 1 is the basic version consisting of an uncased PCB with a normal 28 pin IC socket. UVIPROM 2 is also an uncased PCB but with a 28 pin TEXTOL Econozip zero insertion force (ZIF) socket, screwdriver operated.

UVIPROM plugs into the user port on the BBC microcomputer using a 20 way ribbon cable and socket, taking its power directly from the computer. It has a switchmode power supply for Vpp (21 volts nominal) voltage generation. Current consumption is 60 mA read, 200 mA program. Two switches with LED indicators are provided, one for powering down UVIPROM to insert an EPROM, and one for Vpp on/off.

The 1.0 UVIPROM software is available on Sideways ROM (EPROM) only from us, and the following commands are available: ★TEST (blank check), ★READ (afsp) (read EPROM to disc), ★BLOW (afsp) (blow EPROM with named file), ★VIEW (look at contents of EPROM after read), ★COMP (afsp) (Compare contents of EPROM to source). When using ★BLOW, ★VIEW and ★COMP the screen displays the data in hex and ASCII format, in full colour. EPROM data storage starts at &2000. If you have STL SWR then you can of course put UVIPROM 1.0 onto disc and erase the EPROM for further use. The software is also available from STL on volume 8.

Prices:	UVIPROM 1	UVIPROM 2	UVIPROM 1.0 ROM
	£20.95	£25.95	£8.00

UVIPAC EPROM ERASER

The UVIPAC was designed especially for the home microcomputer enthusiast, but is equally useful in the development lab when quick erasure of just a couple of EPROMS is required.

A special type of discharge tube is used to help achieve the very compact dimensions of the unit, which is housed in a 90 x 80 x 40 mm plastic case. The 230 or 110 volt (+ or -5%) mains powered unit enables up to 3 EPROMs of any size, or 1 CPU with on-board EPROM to be erased in around 15 minutes usually.

The EPROMs are simply loaded into the conductive foam pad supplied and inserted into the unit. After the door has been closed the unit is switched on, an optical fibre indicator showing positively that the unit is in operation. When the required period has elapsed the unit is switched off and the EPROMs removed. The UVIPAC can also be supplied with a built in fixed 15 minute timer, the UVIPAC (T), or with timer and audible time out sounder, the UVIPAC (TS). Spare tubes and conductive foam pads are available if required.



Prices:	UVIPAC	UVIPAC (T)	UVIPAC (TS)
	£21.45	£26.45	£28.45

EPROMS

Type	Speed	1-2	3-9	10-24
2764-25	250 nS	£6.50	£6.00	£5.50
27128-25	250 nS	£13.50	£13.00	£12.50
HM6264LP	150 nS	£17.50	£phone	£phone

Hitachi or NEC only supplied. Quantity 25 up, please phone.

Ground Control

Send orders to:
Dept. AU
Ground Control
Alfreda Avenue
Hullbridge
Essex SS5 6LT

MAIL ORDER ONLY



Tel: 0702 230324

All prices include VAT and p&p



Leigh Computer Systems

NEVER BEATEN ON PRICE!

PRINTERS

CANON 1156A	£420.00	KAGA K910	£399.00
CANON PW1080A	£309.00	MANNESSMANN TALLY	£209.00
EPSON RX 80	£218.50	MT80	£209.00
EPSON RX 80 F/T	£245.00	MANNESSMANN TALLY	£209.00
EPSON FX 80	£373.75	MT 180	£209.00
EPSON MX 100	£420.00	STAR 10X	£218.00
EPSON FX 100	£420.00	STAR 15X	£218.00
EPSON DX 100	£487.50	Serial Interfaces for	£324.00
EPSON LX 100 (Daisy wheel)	£408.25	Epson	£143.00
EPSON JX 80	£516.00	8143	£41.00
EPSON LQ 1500	£516.00	8148	£64.00
KAGA K810	£1019.00	Paper £12 for	
JUKI 6100	£299.00	2000 Sheets	
	£369.00	Printer Leads	£8.00

ROMS

Wordwise	£36.80
View	£59.95
Graphics ROM	£31.00
Disc Doctor	£31.00
Gremlin	£31.00
Print Master	£31.00
Caretaker	£31.00

EPROMS

2764	£5.00
27128	£12.50
8271's in stock.	

CUMANA DISK DRIVES

CSX 100	£109.25
CSX 200	£145.00
CSX 200D	£151.00
CSX 400	£173.00
CS 100	£145.00
CS 200	£175.00
CS 400	£199.00
CS 100E	£136.80
CS 200E	£164.82
CS 400E	£190.00
CS 200ED	£175.75
CD 200	£259.00
CD 400/D	£347.00
CD 400/S	£328.00
CD 800/S	£376.00

Note: CSX drives have no power supply.
DFS KIT £105.00
DDFS KIT £105.00

Range of OPUS Drives at Competitive Prices

EDUCATIONAL
ORDERS SUPPLIED

—Price list available on application
ALL PRICES INCLUDE VAT

MONITORS

DIGIVISION	£169.00
MICROVITEC CUB 1431 14" TTL	£195.00
MICROVITEC CUB 1451 14" TTL	£275.00
MICROVITEC CUB 1441 14" TTL	£399.00
AU Microvitec Cub monitors, BBC Electron, Oric, 48 oz compatible.	£275.00
QL MONITOR	£199.00
SABA (same as Normende)	£199.00
Manual	£84.00
Remote	£89.00
Philips Green Screen 7502	£105.00
Philips Amber Screen 7502	
750 2 For IBM PC.	

PERIPHERALS


PRO Link Interface	£9.95
Cumana Graphpad	£69.00
AMX Mouse	£78.00
Teak Monitor Stand	£10.35
Marconi Tracker Ball	£69.00
HCR Eprom Programmer	£57.00
HCR 16K RAM Board	£36.00
Extra RAM For RAM Board	£23.00
British Micro Graphpad	£99.00
Viglen ROM Sockets	£15.95
All other Viglen products available.	

COMPUTERS


ACORN ELECTRON	£129.95
BBC B	£349.95
BBC B with DFS	£399.95
TATUNG EINSTEIN	£499.00
SANYO 555	£995.00
ADVANCED 86B:	
128K MODEL	£1248.90
256K MODEL	£1329.90

75 CROSS STREET, SALE
MANCHESTER
Telephone: 061-905 2144


7 COVENTRY ROAD, HINCKLEY
LEICS
Telephone: 0455 612139

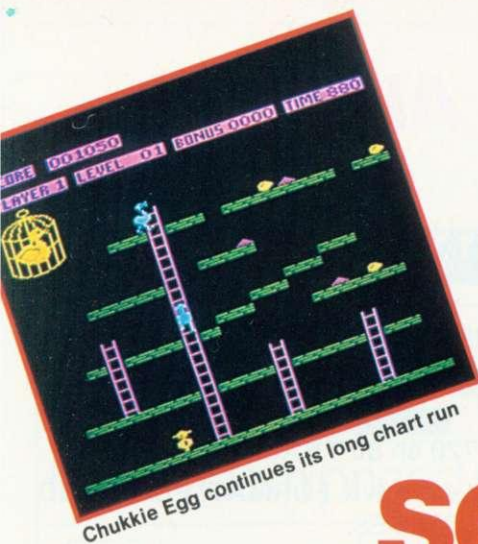

Chukkie Egg continues its long chart run

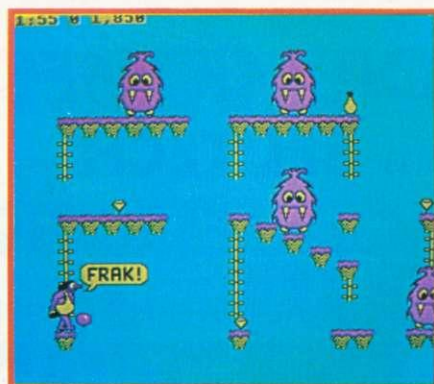

Challenger for the no. 1 spot is Frak!

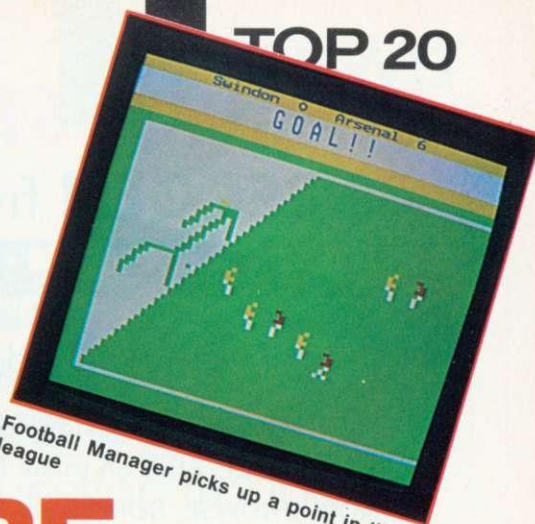

Football Manager picks up a point in the league

SOFTWARE CHART

157

TITLE		PUBLISHER	PRICE	MICRO	REVIEWED
1 (1)	Elite	Acornsoft	£14.95 (£17.95)	B/E	October '84
2 (6)	Frak!	Aardvark	£7.50	B	September '84
3 (—)	Blockbusters	Macsen	£7.95	B/E	
4 (2)	Sabre Wulf	Ultimate	£9.95	B	
5 (4)	3D Grand Prix	Software Invasion	£7.95	B	February '85
6 (7)	Scrabble	Leisure Genius	£12.95	B	
7 (9)	Eddie Kidd's Jump Challenge	Martech	£7.95	B/E	March '85
8 (14)	Pole Position	Atarisoft	£9.99	B	March '85
9 (10)	Football Manager	Addictive	£7.95	B	March '85
10 (3)	Manic Miner	Soft Projects	£8.95	B	
11 (—)	Chess	Various	£6-£10	B/E	
12 (8)	Jet Pac	Ultimate	£7.95	B	
13 (—)	Hunchback	Ocean	£7.95	B	
14 (13)	Return to Eden	Level 9	£9.95 (£11.95)	B	
15 (re)	Acid Drops	Firebird	£2.50	B	
16 (—)	Music System	Island Logic	£24.95	B	
17 (15)	Chukkie Egg	A&F	£7.95	B/E	September '84
18 (17)	Fortress	Pace	£8.95	B	September '84
19 (18)	Hobbit	Melbourne House	£14.95	B	
20 (16)	Snooker	Visions	£8.95	B	

B=BBC. E=Electron. re=re-entry. Prices in brackets are for disc version.

BUBBLING UNDER

Jump Jet
Micro Olympics
Chartbuster
Contract Bridge
Mr Ee

Dr Soft
Database
Alligata
Alligata
Micro Power

Compiled by RAM/Computer

FAMILY HISTORY COMES ALIVE!

with **BEL GEN** from **BEL TECH**
BEL TECH FOR **BBC** AND **ELECTRON**

DEDICATED DATA BASE WITH ADDITIONAL POWERFUL OPTIONS FOR STUDY AND PLEASURE

- * MENU DRIVEN, SOPHISTICATED but EASY TO USE
- * 360 PEOPLE/FILE on truly RANDOM ACCESS DISC VERSION (720 on 80 TRACK, 75 on TAPE)
- * ADD, BROWSE, SORT (Any Field), CONDITIONAL PRINTS/DISPLAY OWN FORMAT, EDIT, FIND, SAVE, SEND PRINTER CONTROL CHARACTERS, SELECT DISC DRIVES.
- * ALL OPTIONS can be DISPLAYED OR PRINTED
- * FIELDS (TOTAL OF 20) ARE:

FAMILY NAME
 GIVEN NAMES
 GENDER
 OCCUPATION
 PLACE
 DATE of BIRTH/BAPTISM
 DATE of DEATH/BURIAL
 No. of CHILDREN
 SPOUSES (Up to 3)
 DATES OF MARRIAGE
 REMARKS/NOTES



- * ALL DATES can be CIRCA, ESTIMATED, ACTUAL
- * SPECIAL SEARCHES AND PRINTS/DISPLAYS additional to OWN REPORTS
 - * ANY NAME or PLACE
 - * No. of CHILDREN
 - * GENDER of CHILDREN
 - * PERIOD of YEARS
 - * ANY FOUR GENERATIONS
 - * LONGEVITY
- * SUPPLIED WITH TEST DATA FILE 'ROYAL' AND COMPREHENSIVE MANUAL
- * TAPE USERS CAN UPGRADE TO DISC LATER FOR £3.00




MALE PARENTAL LINE
 KEY PERSON GEORGE WINDSOR

SAXE-COBURG = HANOVER
 ALBERT VICTORIA
 1819-1861 1819-1901
 GERMANY OSBORNE

! —————
 !

SAXE-COBURG = SAXE-COBURG
 EDWARD ALEXANDRA
 1841-1910 1845-1925
 LONDON DENMARK

! —————
 !

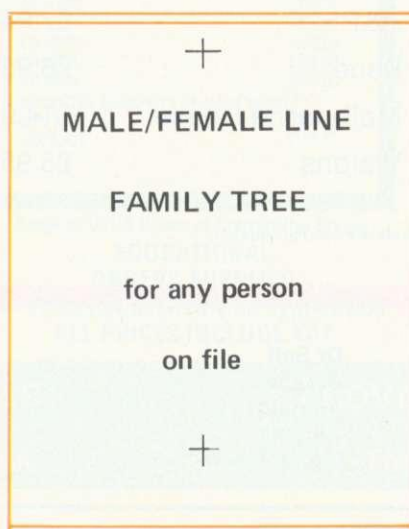

Order Form	TAPE		DISC		TOTAL
		QTY		QTY	
BEL BASE	16.00		18.00		
BEL GRAPH	15.00		17.00		
BEL CHEM Chemistry 1	9.50		11.50		
Chemistry 2	9.50		11.50		
BEL GEN Geneology	15.00		17.00		
MAIL SHOT	9.50		11.50		
BEL PLOT	9.50		11.50		
BEL SUBS	10.50		12.50		

TOTAL inc. P. & P. £

NAME _____

ADDRESS _____

COMPUTER TYPE _____ MODEL _____

DISC (if applic.) _____

CREDIT CARD No. PAYMENT BY CHEQUE P.O. VISA ACCESS

Please Complete & Return to:-

BEL TECH Limited, Stanmore Industrial Estate, Bdgorth, Shropshire WV15 5HP or

Telephone: 07462 5420 (24 Hrs.)

DIAL-A-DEMON

Is a modem priced under
£50 too good to be true?

Bruce Smith answers

a question troubling
many of you with a
resounding 'no'

159

Demon Modem, Rushworth Dales, 20 Orange Street, London WC2, £49.95 (+ VAT)

SHORTLY after the January issue of *Acorn User* hit the streets, my working life as technical editor took a turn for the worse – my phone began to glow red-hot as numerous readers called to enquire about the £50 Unicom Modem which was advertised in it. One irate Telecom engineer even 'phoned to say that the whole thing must be a con as no one could produce a modem that cheaply. So, does it work and if so how well?

The design has changed since that original ad. The box is a no-thrills beige plastic affair, supplied with copious lengths of lead. Dismantling the modem is not advised: you'll never get it back together again as the whole caboodle is held together from the inside with clips.

At the front of the modem are five small LEDs which indicate the modem status – eg, the current baud rate and the presence of a carrier signal.

Three push switches are used to select mode, baud scan and standard. The mode switch selects the 'auto answer' feature – in other words, if you set up the software, the modem will answer any incoming calls to your bulletin board. The auto scan switch can be used in conjunction with suitable software to allow the baud rate to be detected and set automatically. Finally the standard switch allows you to select a different telephone system configuration, enabling you to contact databases in the United States.

Using the modem is simplicity itself. You obviously need some sort of firmware, and both Termi and Communicator are compatible. For best results, and to make full use of the hardware features such as the auto baud scan, the Demon Zromm is also available.

This ROM supplies just about all the facilities you are ever liable to need, and again, it is easy to use. To call Prestel from within London for example just ensure that you are all plugged in and type *PRETZEL – that's all! The firmware will now dial the number for you, select the appropriate baud rate and display the Prestel title page onto the screen. If function key 11 has been pre-programmed with your ID number

error when a ringing phone is detected. A suitable ON ERROR sequence can therefore be included in your program to handle the incoming data.

The baud rate is set with *BAUD and transmission is full duplex – ie, it can occur in both directions at once.

Simple terminal firmware is possible with *CHAT. However this is limited, and *TERMINAL can be used when logging onto packed switch stream (PSS)

databases such as BT Gold. In general PSS services such as Gold, MUD and The Source, can be accessed with a single *PSS command which dials the Slough Computer.

*DLOAD and *ULOAD allow data files to be sent or received, and three protocols are offered; *SEND and *GET act in a similar manner.

Other commands include *ON and *OFF to put the modem on or off line; *NOVEC disables the Zromm's interrupts; *HOPPIT totally disables the ROM; *PASSWORD allows the creation of a password should you wish to set up

your own bulletin board: *STATUS is a sort of modem report command telling you what baud rate you have chosen, whether auto answer is on or off, etc.

And so to my verdict. In the short time I have been playing around with the Demon it has proved reliable and I see no reason why it should not continue to do so. The modem looks a cheap product, but combined with the Demon Zromm, it performs as well as – if not better than – any I have used. The auto dial and auto answer features are not available on many of its more expensive competitors and even the novice user would find it quite easy to implement his or her own bulletin board.

The inclusive price of the Demon Modem is £60, plus £24 for the firmware, bringing the total to £84 all-in – exceptional value for money.



Demon Modem: exceptional value for money

and password you will be logged on automatically, and can use Prestel.

Users outside London need to dial their local Prestel computer first and then enter *PRESTEL. Dialling is performed automatically with *DIAL.

The Prestel commands also set up various keys to allow you to move through the viewdata system with ease and speed. A typical example is the Copy key which will send *00 to the Prestel computer, informing it to redraw the current frame. Printer and downloading routines are also available at a stroke; f2 dumps the current screen to disc, while f7 dumps the screen to a printer.

With the modem switched to auto answer the command *ANSWER ON will invoke the auto answering firmware. In fact what it does is generate an



BBC COMPUTERS:

BBC Model B	POA
BBC Model B + DFS	469.00
BBC Model B + Econet	446.00
BBC Model B + DFS + Econet	516.00
BBC Hard Cover	11.95
Acorn Teletext Receiver	225.00
Acorn Prestel Receiver	113.85
Acorn 6502 2nd Processor	199.00
Acorn Z80 2nd Processor	399.00
Acorn IEEE Interface	325.00
Bitstick	375.00

ELECTRON COMPUTER:

Electron	129.00
Plus One Interface (Printer/Joystick)	59.95
Plus Three Interface (DFS/Disc Drive)	229.00

TORCH COMPUTERS:

Z80 Disc Pack	750.00
Z80 2nd Processor Card	299.00
Graduate	1149.99

ECONET SYSTEM:

Full Service Available	POA
------------------------	-----

BBC FIRMWARE:

View ROM	59.80
Wordwise ROM	44.85
Wordwise + ROM	56.35
Viewsheets ROM	59.80
Speech Synthesizer	55.00
Ultracalc Spreadsheet ROM	74.75
Graphics ROM	33.35
Disc Doctor ROM	33.35
Printmaster ROM	33.35
Communicator ROM	69.00
Termi Emulator ROM	33.35
Gremlin Debug ROM	33.35
Caretaker Basic Utility ROM	33.35
Toolstar ROM	34.00
Commstar EPROM	34.00
BCPL ROM	99.65
System ADE ROM	60.00
System SPY ROM	30.00
Edword User Pack	44.79
Edword Teacher Pack (Disc)	25.24
Merlin Scribe	59.95
Beebug Soft: Full Range Available	129.00
Gemini Datagame Database ROM	69.00
Acorn Iso Pascal ROM	69.00
Acorn Logo ROM	49.95
Slave ROM	29.95
Floppywise	29.95

BBC UPGRADES:

A-B Upgrade (Fitted)	95.00
A-B Upgrade (Excluding Fitting)	80.00
Acorn DFS Interface (Fitted)	109.00
Opus DD/DFS Interface	129.95

EXPANSION BOARDS:

APTL Sidewise ROM Board	43.70
Aries B20 RAM Expansion Board	79.95
Aries B12 Sideways ROM Board	46.00
Aries Board Complete	115.00

SOLIDISK PRODUCTS:

Solidisk 32K Sideways RAM	57.95
Solidisk 96K Extension	92.00
Solidisk 128K Sideways RAM	149.95
Solidisk 256K Sideways RAM	POA
Solidisk DD/DFS Interface	39.95
Eprom Programmer	20.95
Eprom Eraser	20.95

PACE 5.25" DISC DRIVES:

PSDI SS/40T/100K	119.95
PSO3 DS/40 80T/400K	189.00
PD03 DS/40 80T/800K	359.00

CUMANA 5.25" DISC DRIVES:

CS100 SS/40T/100K (PSU)	159.95
CS400 DS/40-80T/400K (PSU)	215.95
CD800S DS/40-80T/800K (PSU)	414.95

CUMANA 3.5" DISC DRIVES:

CSX351 100K 40T (No PSU)	139.95
CSX354 400K 40-80T (No PSU)	199.95
CD358 800K 40-80T Dual (With PSU)	429.95

DISC UTILITIES:

View Index	14.95
View Printer Driver Generator (New)	11.50
Hi-View	59.80
Acornsoft Database	15.35
Clares Betabase 40/80T Available	25.00
Clares Graphdisk 40/80T Available	12.95
Clares Replica II Disc Copier 40T	11.95
Clares Replica II Disc Copier 80T	11.95
Clares The Key 40/80T Available	12.95
Beebugsoft Masterfile II	19.00

DISCS

Mr Floppy	16.50
-----------	-------

PRINTERS:

Cannon PW-1080A/KAGA	330.00
Cannon PW1156A/KAGA	415.00
Epson RX80FT	275.00
Brother M1009	199.95
JUKI 6100 Daisywheel	399.00
JUKI 220 Daisywheel/Tpewriter	299.00
Shinwa CP80A	199.00

MONITORS:

Microvitec Cub Standard	210.00
Microvitec Cub Medium	299.00
Microvitec Sinclair QL Monitor	275.00
Zenith Amber	99.00
Zenith Green	99.00
Phillips Green	94.00
Phillips TV/Monitor	228.00

MODEMS:

Pace Nightingale inc Commstar ROM	159.85
Pace Nightingale	136.85
Telemod 2	84.95
Telemod 3	159.00
Telemod Software BBC User/User	19.95

JOYSTICKS:

Sure Shot Joystick	18.95
Voltmace Delta 14b Handset	14.95
Voltmace Delta 3b Dual	19.95

BBC BUSINESS SOFTWARE

Microsimplex	287.50
Gemini Integrated Accounts	99.95
Sage Accounts	431.25

CONTROL/ROBOTICS

AMX Mouse	89.00
Commotion EVI/SS	129.00

PLOTTERS

Penman Plotter	274.85
Wattanabe A3 Plotter	POA
Acorn Plotter Drivers	79.95

DOUBLE SIDED 80 TRACK DISC DRIVE & SOLIDISK DD/DFS 1.9 £199 inc VAT (2.0 DD/DFS ROM £10 extra)

WE HAVE A RANGE OF BUSINESS & WORD PROCESSING PACKAGES BASED AROUND THE BBC & TORCH COMPUTERS

ACORN APPROVED SERVICE CENTRE

Our workshop offers a comprehensive service including Repairs and Upgrades by our own engineers
Shop open 9-6 Mon-Sat

EDUCATIONAL & INDUSTRIAL ENQUIRIES WELCOME



Please phone for our price list
All prices include VAT, Post & Packing
£9 (Large items) £1 (Small items ROM's etc)



RAINFORD INDUSTRIAL ESTATE, MILL LANE,
RAINFORD, ST. HELENS, MERSEYSIDE
PHONE 074488 5242

LARGEST COMPUTER CENTRE in MANCHESTER

BBC, COMMODORE, MEMOTECH, SINCLAIR,
SHARP, SANYO, AMSTRAD, QL,
EINSTEIN, ADVANCE 86
DEALERS.

BBC MICRO

BBC B	£349.95
Electron	£129.95
6502 Second Processor	£199
Z80 Second Processor	£349
Bitstick System	£374

MODEMS

Telemod, Miracle, Pace Nightingale.

MONITORS

Sanyo 12H	£125
Philips	£89
Microvitec	£229
Microvitec Medium	£299
Sanyo Medium	£227
Fidelity	£217
JVC Medium	£199
JVC High	£272
Ferguson MC101 TV/Monitor	P.O.A.

DISK DRIVES

Opus, Pace, Cumana

PRINTERS

Shinwa CPA80	£234
Olivetti JP101	P.O.A.
Star Gemini 10X	£239.95
Juki 6100	£388
Epson RX80 FT	£289
Cannon 1080	£329
Cosmos CP80	£214.95
National Panasonic	£235
Brother HR15	£458.95
Brother HR1	£343.95
Taxan KP810	£327
Taxan KP910	£458
Juki 2200	£299

ACCESSORIES

Wordwise	£39.95
VIEW	£59.95
Grafpad	£143.75
Sideways ROM	£43.70
Graphics ROM	£33
Disc Doctor	£33
Datagame	£129.95
AMS Mouse	£89.95
Trackerball	£59.95

COMPUTER STATIONERY, DISKS, PLUGS, SOCKETS, CABLES, ETC.
TELEPHONE ANSWERING MACHINES/CORDLESS PHONES: NOW IN STOCK
Wide range of books, software (educational software specialist).
Showroom, demonstration facility. Prices include VAT, all items
available mail order. Personal Export scheme.

Suppliers to Universities and all leading Schools
OFFICIAL DEALER FOR ACORN MICROS IN THE SCHOOL SCHEME



MIGHTY MICRO
SHERWOOD CENTRE
268 WILMSLOW ROAD
FALLOWFIELD, MANCHESTER
TEL: 061-224 8117



R.S.D. CONNECTIONS

CONNECTORS IDC			IDC SHROUDED HEADERS WITH EJECTING LOCKING ARMS			IDC D CONNECTORS		
Card Edge	(Transition) PCB	2 Row Socket	Straight Right Angle			9-way	Male	Female
10-way	£1.20	£0.85	10-way	£1.00	£1.20	15-way	£2.70	£3.20
14-way	£1.20	£0.85	14-way	£1.25	£1.45	25-way	£3.80	£4.45
16-way	£1.60	£1.20	16-way	£1.70	£1.95	37-way	£5.90	£6.80
20-way	£1.90	£1.35	20-way	£2.00	£2.30	IDC AMPHENOL		
26-way	£2.40	£1.60	26-way	£2.15	£2.45	(Centronics)		
34-way	£3.10	£1.95	34-way	£2.30	£2.65	36-way plug		£4.95
40-way	£3.40	£2.00	40-way	£2.45	£2.85	36-way socket		£5.95
50-way	£3.85	£2.25	50-way			D CONNECTORS		
60-way	£4.80	£2.60	60-way			Solder Bucket	Male	Female
PRINTER LEADS			COMPUTER LEADS			9-way	75	£1.00
ALL 1 METRE LENGTH			Dual disk drive 1m			15-way	95	£1.50
BBC serial	£9.95		Single disk drive 1m			25-way	£1.50	£1.90
AMSTRAD	£8.95		7 pin DIN plug to 2x3.5mm			37-way	£2.40	£3.25
MEMOTECH	£16.75		1x2.5m Jack plugs			HOODS .95		
MEMOTECH	£12.75		5 Pin DIN plug to 2x3.5mm			RIBBON CABLE (Price per ft)		
EINSTEIN	£12.75		1x2.5m Jack plugs			Grey Rainbow		
IBM PCC	£15.95		6 Pin DIN Plug to 6 Pin			9-way		
SPECTRUM interface	£9.75		DIN Plug			10-way		
1 to RS 232	£10.75		2x3.5mm Jack plugs to			14-way		
1 to Centronics	£10.75		2x3.5mm Jack plugs			15-way		
CENTRONICS to	£15.20		7 Pin DIN plug to 5 pin			16-way		
Centronics	£15.20		DIN plug			20-way		
DRAGON	£9.95		7 Pin DIN Plug to 3 pin DIN			24-way		
QL	£10.75		plug and 2.5mm Jack plug			25-way		
DIP HEADERS			7 Pin DIN plug to 7 Pin			26-way		
Pins			DIN plug			34-way		
14	90p		DIN plug			37-way		
16	£1.00		5 Pin Domino Plug to 5 pin			50-way		
24	£1.40		Domino plug			60-way		
28	£3.95		Phono Plug to Coaxial TV			64-way		
40	£2.15		Aerial plug					
TELEPHONE CONNS			EDGE CONNECTORS			JOYSTICK DELUXE		
Surface master			2x23-way (ZX81)			JOYSTICK for		
jack socket	£3.75		2x28-way (Spectrum)			BBC MICRO.		
Surface extn socket	£2.50		2x6-way VIC20/64			Fits directly into		
Dual outlet adaptor	£4.25		2x12-way			BBC Micro		
Line jack cord 3mtr	£1.85		DOUBLE SIDED PLUG			analogue port		
BT jack plug	48p		BOARDS					
4 core cable per metre	15p		ZX81 23-way					
All surface units shuttered BT			Spectrum 28-way					
approved.								
SPECTRUM EXTENSION LEADS			MONITOR LEADS					
6 inch extension cable M to F			BBC 6 pin to start plug					
6 inch M to 2 F's	£10.50		BNC plug to phono plug					
12 inch extension cable M to F	£14.75		QL to colour monitor					
	£10.75		QL to mono monitor					
Other configurations made to order								
Write or phone for quote								

TRADE
ENQUIRIES
WELCOME

Please add
15% VAT

Free p&p C.W.O. or use

R.S.D. CONNECTIONS LTD. Dept. AU4
Telephone: 0920

Get to know

yourself


'Know Your Own Personality', Mirrorsoft/Ivan Berg Software, BBC B and Electron, £9.95 (disc £12.95, available only from Mirrorsoft direct)

THIS program is a computerised version of the book of the same name by Hans Eysenck and Glenn Wilson, published 10 years ago, although only three of the book's six tests are included on this software.

These tests are said to measure, respectively, your extroversion/introversion factor, your emotional stability and your tough/tendermindedness quotient.

Each test consists of 70 questions, to which you respond <1>, <2>, or <3> according to yes/no/can't decide. When you've answered the questions the results are shown in bar chart form, together with background comments about your various characteristics, and can be stored on tape or sent to a printer.

By an odd coincidence I had a copy of the book with the tests completed. So I was able to compare my answers now

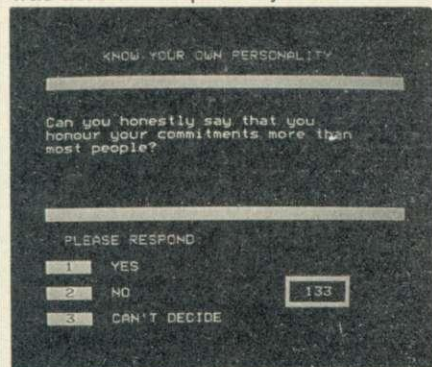

with those of 10 years ago and they were almost identical.

The computer is certainly a much faster and easier vehicle for doing the housekeeping than the book, where a cumbersome system of ticking off the answers, adding your scores and making your own marks on the graph is called for (if, unlike me, it doesn't take you 35 attempts before the program loads, that is!), and the bar graphs are well presented.

The questions have been reproduced absolutely faithfully from the book and no attempt made to clear up ambiguities in the original – how do you interpret 'Do you like entertaining people', for example? I noticed that 10 years ago I answered 'No' to the question 'Do you always wear a seat belt?' whereas this time round I answered 'Yes'. The reason is nothing to do with my attitude to seat belts changing,

merely that the law has changed in the intervening period and I don't want to get prosecuted by the police! Nevertheless, there are enough questions to answer in each test without your response to individual cases affecting the overall picture too much.

Psychologists, for obvious reasons, tend to be both bland, flattering and extremely general in their descriptions of people they've never met. So if the program tells you you're 'assertive, impulsive, creative, ambitious...' don't kid yourself that others don't think you're a homicidal maniac from whom society should be protected!

Still, it's a good program if you like this sort of thing and, since inputting the answers to the questions is so easy, a good introduction to the fun of home computers.

Simon Dally

Bear necessities

'The Sting', Gemini, BBC B, £9.95

BRUNO the bear and Teddy the cub against the world – oh, all right, I'm exaggerating. Bruno is greedy; he likes fruit and is not above swiping it from the orchard. The enemy on this occasion is a wasp which blunders around the orchard. Should ever the twain meet Bruno turns his badge in and his toes up. He can hide behind logs and sometimes temporarily stun the wasp with an aerosol.

The fruit is scattered about the corners of the orchard and has to be eaten by Bruno in a set sequence. Clearing one lot of fruit gives you the chance to score bonus points by moving through a maze and reaching good ol' Teddy, but that wasp is still



involved, bumbling around and crashing into things. You also have to avoid wandering poison mushrooms on the long march to Teddy, or you don't get a bonus.

You have three lives. The action gets more complicated with different shaped orchards and more little caches of fruit as you go on.

Controls are simple – the up/down/left/right variety. The graphics are OK

without being spectacular and the sound is confined to bursts of the Scott Joplin classic.

Not a bad game, which would probably appeal to the younger members of the family.

Harry Sinclair


Bumpy

flight

'747 Flight Simulator', DACC, BBC B and Electron, £9.95

WITH great patience and adjusting of volume, I eventually managed to load the program, one of the vast range of flight simulators currently available, which I found to my horror was written entirely in Basic! The screen presentation is very poor, although there is the option to use a joystick.

You have to decide the quantity of fuel and passengers for your flight and whether to land or take off. The cockpit is then drawn slowly, containing the usual dials – altimeter, compass, etc, including various failure reports such as engine fires and brake failures,

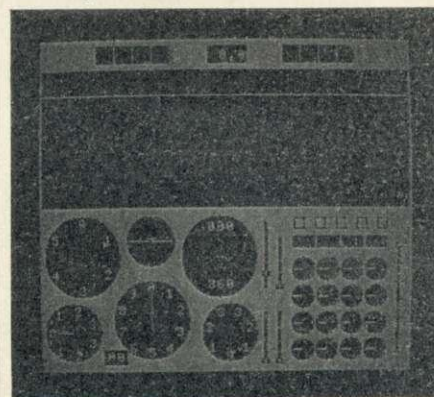

which all add to the excitement. Sadly it's only drawn in two colours, but you can change these to your taste. The plane is then in your hands to crash, or, possibly, to fly!

In all there are about 30 keys to be pressed, controlling brakes, landing gear, flaps, direction, etc.

The pilot's view is very disappointing – the horizon never moves and the only scenery is the runway.

All bad things aside, the program is simple yet effective and the programmer really seems to know what he's talking about.

The accompanying instruction booklet has in-depth information about the basic concepts of flying, as well as the instructions, which is quite unusual. It explains how each instrument helps to manoeuvre the aircraft and when it should be used. In fact, it makes up for the bad use of colour, sound and graphics.

Jonathan Gill

Synergy Software

'PROFESSIONAL Software for the BBC Micro'

EASIPILOT

"a very good program . . . overall rating 92% "A + B Computing
"excellent" Which? Software Guide



Easiplot is a sophisticated and user friendly BUSINESS and EDUCATIONAL graph package. Voted the 14th best educational program, Easiplot has come to be regarded as an outstanding business package and excellent value for money. This latest version is configured for single or dual disk drives and is compatible with screendump ROM's enabling large or small graph printing. Ideal for VIEW and WORDWISE reports.

COMPREHENSIVE FACILITIES INCLUDE:

- ★Line, Bar, Pie, Scatter and Data charts
- ★5 line or bar merging
- ★Bar/Line conversion option
- ★Auto or manual scaling
- ★Comprehensive label and edit facilities
- ★Screendumps for Epson compatible printers
- ★Save/Load options on single or dual drives
- ★Provides easy access to screendump ROM's
- ★Grid and screensave facilities
- ★56 page USER MANUAL
- ONLY £24.95

BIOGRAM is a new concept in computer software


For less than the cost of most ROM software the BIOGRAM SYSTEM provides you with the tools to control your state of relaxation and response to stress.

BIOGRAM uses proven biofeedback techniques to provide you with audio/visual impressions of your physiological and psychological state.

Your stress level is detected by two electrodes and is converted and relayed to the computer by the electronic BIO-MODULE. The BIOGRAM software translates this signal into a form that will enable the user to learn to influence his own state of mind.

BIOGRAM is FUN and EASY to use, just plug in the module, attach the electrodes and choose your program. Ready to run in seconds.

BIOGRAM

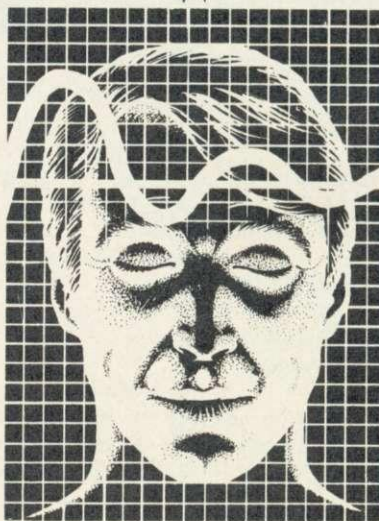

The BIOGRAM system comprises an electronic bio-module fitted with plugs and electrodes and a suite of programs on disk or cassette.

The BIOGRAM software package includes:

- ★RELAXOGRAM – a multi-level relaxation trainer and progress tester.
- ★LIE DETECTOR – a graphical lie detector with an automatic interrogation facility.
- ★P.REDUCER – a programmable phobia identifier and reducer.

The comprehensive user Manual provides many examples of biofeedback applications and experiments to try.

HARNESS THE POWER OF BIOFEEDBACK – LEARN TO CONTROL YOUR FEARS, PHOBIAS and STATE of TENSION. AN INVESTMENT FOR THE WHOLE FAMILY AT £37.95

SHARE ANALYSER

'an excellent program' *Micro User* – Jan 85
'an invaluable aid' *Northern Echo*
'very highly recommended' *Which? Software Guide*
'Excellent investment' *Luton News*

Share Analyser is a comprehensive reporting, analysis and charting package for the BBC Micro. Transaction and share price databases are built up for each share name and a variety of report and analysis facilities can be instantly accessed. Reports can be produced on any printer. Share Analyser is easy to use and is supplied with a comprehensive Operating Manual.

FACILITIES INCLUDE:

- ★Up to 20 share names per portfolio per disk
 - ★Use as many disks as you require
 - ★Capacity per disk – 20,000 whole number share prices and 320 purchase/sale/dividend records
 - ★Reports include Valuation, Profit Statements, Movement Analysis, Transaction Reports etc
 - ★Graphics facilities include Moving Averages, Rise and Fall, Superimpose, Magnification, Grid, Screenwrite, Screendump etc
 - ★Adjusts for scrip issues etc
 - ★Provides access to screendump ROM's
- EXCELLENT VALUE at £24.95 – ask for full details.



All Easiplot and Share Analyser specifications are for the disk version. FULL DETAILS OF ALL OUR PRODUCTS ARE AVAILABLE ON REQUEST.

Prices include p + p etc – no extras

PRICE

Biogram (cassette or disk) .BBC B only
Easiplot 1 (cassette) .BBC B & Electron
Easiplot 3 (including Dataplotter – disk)
Share Analyser (cassette) .BBC B & Electron
Share Analyser (disk) .BBC B only

£37.95
£15.95
£24.95
£17.95
£24.95

Disk orders .state 40 or 80 track (add £3 for overseas orders).
Write or phone for further details (0582) 33858 (Ansaphone Service).
ALL PROGRAMS ARE NORMALLY DESPATCHED BY FIRST CLASS POST
WITHIN 24 HOURS AND ARE GUARANTEED FOR 12 MONTHS. Available
MAIL ORDER only.

Send cheque/PO etc to Synergy Software 7, St Andrews Close, Slip End,
Luton, LU1 4DE.

Creative

colouring

'Electronic Colouring Book', Addison-Wesley Software, BBC and Electron, £9.95

I'VE forgotten what it's like to mess about with paint pots and crayons. From what I remember about my own children's creative bursts, the excitement seemed to centre on how many different colours they could get on the ceiling before I started laying about



them with my trusty club. This program takes the mess (and possibly most of the fun) out of the process.

Eighteen outline drawings are provided for the little dears to colour. First the main program is loaded and then you can load in one of the drawings if you wish. Four of the drawings have colourings which can also be loaded from the tape. Down the right-hand side of the screen is the colour palette which contains quite a few 'new' colours,



obtained by pixel mixing – there are 35 colours in all. Moving the cross-hair sights onto a colour using the keyboard or joystick enables you then to move over a section of the picture, press 'P' and see the whole of that section filled in. You don't have to use the drawings provided – you can make your own using the 'draw' facility, and drawings and colourings can be saved.

There are options to redefine colours and to let the machine cycle at random through a series of colour combinations. The outline drawings provided are excellent and it's difficult to believe that low resolution mode 2 graphics are used.

All quite pretty and certainly easier on the carpets and wallpaper, but is it as much fun?

Harry Sinclair


Magic carpet

ride

'Sinbad', Virgin Games, BBC, £7.95

VIRGIN games have recently been making noises to the effect that they are trying to improve their software lists and their somewhat shaky reputation. *Sinbad* is one of the first offerings in this new wave.

The company has removed its header page from this game – rather a shame since it was one of their best features in the past, and it loads commendably quickly to display the standard control keys, which are not redefinable. The game features a very lanky Sinbad climbing up and down a rope ladder to his magic carpet and trying to

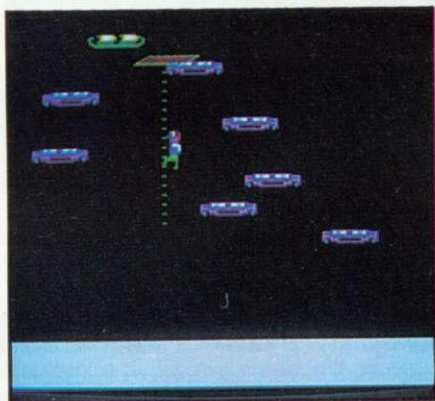

convert things that look like cold-cure tablets into things that look like angry tape cassettes. If you touch a converted creature you are knocked off your perch onto the ground and have to jump on again when the carpet comes within reach.

Changing all the weirdos into other odd creatures moves you to the second game, which has Sinbad on his carpet flying over the earth, while avoiding asteroids which zing past in a fairly convincing attempt at 3D. If you hit any rocks, your energy is sapped. This stage lasts as long as it took you to complete the previous stage, which would be a clever idea if avoiding 3D asteroids was new or exciting.

After this interlude it's back to jumping on carpets and changing floating

rocks to hysterical albatrosses. This time you also have to avoid a very wide spider who also saps your energy if touched. All this energy is being drained away without anyone telling you about it, until it has run out. The higher levels feature snakes as well.

The high score screen shows the percentage of the journey you completed. Virgin advertise *Sinbad* as 'fun for all the family'. My three-year-old certainly enjoyed it, but I wasn't inspired to try for 100 per cent.

Simon Williams



Pick off a

penguin

'Pengi', Visions, BBC A/B (32k, OS 1.2) and Electron, £5.95


IN *Pengi* you are a cute little penguin who wanders around a freezer dodging snow bees and kicking ice-cubes at them. The idea is to kill all the nasty bees in this way, or alternatively entice them onto the surrounding fence, where you can electrocute them.

Another way of moving onto the next screen is to line up the three diamonds lying around – not as easy as it sounds. (Don't kick the diamonds into the corners of the screen because you won't be able to kick them out again.) As the game progresses, more and more bees appear, and as you work your way through the 30 screens, you wonder why they keep coming back for more.

The program is well documented and is 100 per cent machine code. It includes a high score table and a practice mode in which you can play to your heart's content without getting killed. Other features are – redefinable keys; sound on or off; pause and various bonuses.

The game is of a very high standard. Colour, sound and graphics are used to their full extent, although the game isn't as original or exciting as I would have liked. The 30 ice-cube mazes are almost identical but, I must admit, it's addictive.

Jonathan Gill

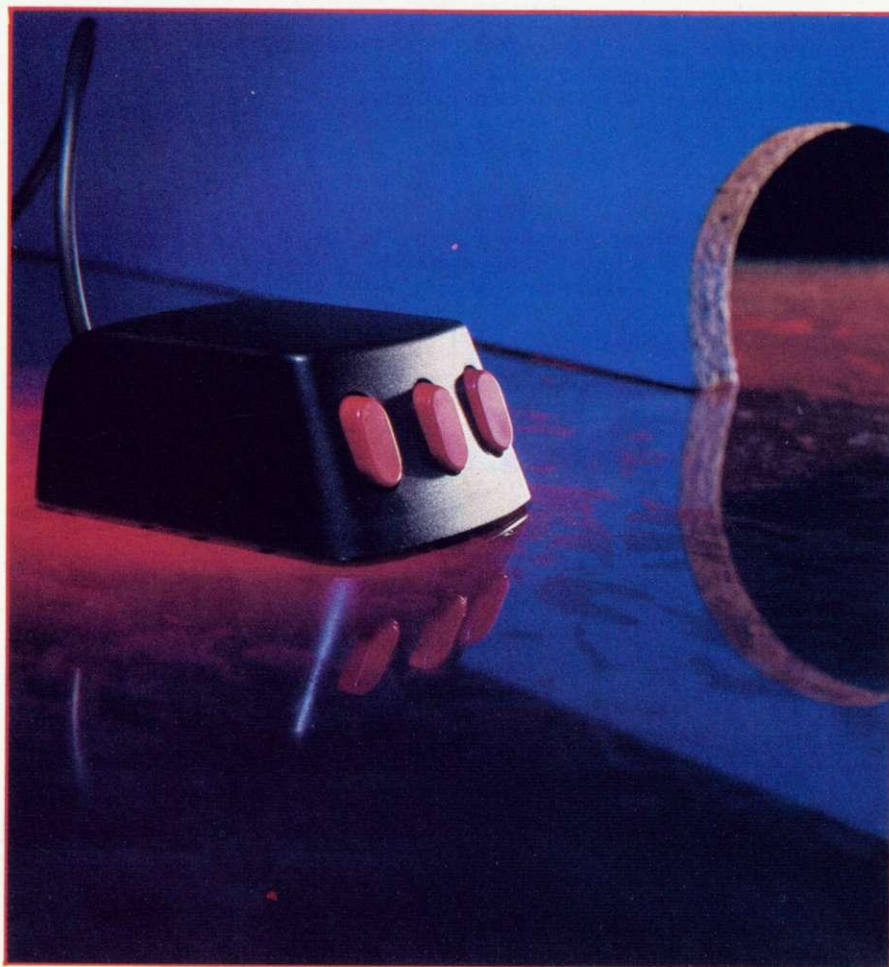

MIGHTY MICRO MOUSE

A mouse in the house (or office) is an asset not a pest, says Bruce Smith

AMX Mouse, Advanced Memory Systems, Woodside Technology Centre, Green Lane, Appleton, Warrington WA4 5NG, £89.95 inc VAT

THERE is probably more jargon in the computer world than in any other hobby, and in the last year or two another word has joined the ever-increasing vocabulary – the mouse. This is a free-moving hand-held object with one, two or three buttons. The base contains a bearing mechanism that allows the user to roll it across the desk top. When used in conjunction with suitable software, it makes the

keyboard obsolete, as programs and tasks become completely menu-driven, and courses of action are chosen by moving a mouse-controlled cursor across the screen to a particular item (this might be a number, letter or small picture). The cursor movement is controlled by rolling the mouse across the desk-top in the appropriate direction. When it's in your chosen position you press a button on the mouse to make the selection (like hitting a key on the keyboard), and the program recognises it and acts accordingly. Until now only the larger business-orientated

micros, such as the Macintosh, provided such a device – a trend which may now be reversed by the introduction of the first 'low-cost' mouse for the BBC micro.

The AMX Mouse is a complete package at under £90 that includes the mouse itself, a connecting cable, a sideways ROM incorporating the 'driving' firmware and some excellent cassette-based software.

Installing the AMX Mouse is straightforward. The ROM plugs into a suitable sideways ROM socket, while the mouse connects via the user port. The AMX Mouse feels good, fitting snugly into a cupped hand. Three red buttons project from the front of the black plastic case and are easily manipulated by the middle three fingers, whether you're left or right-handed. A metre of cable is supplied and allows remote operation of the mouse.

Selecting the user port as the interface to the Beeb is a good move as it frees the analogue port for joystick or other applications – though I suspect the choice was made for reasons of ease of interfacing.

On the technical side, the AMX Mouse uses only five bits of the port (bits 0, 2, 5, 6 and 7) plus the two control lines, CB1 and CB2. 6502 second processor compatibility is guaranteed.

With the mouse correctly installed, powering-up the Beeb displays the MOUSE OFF message along with the usual system details. The mouse is activated by typing *MOUSE ON. This command re-directs the operating system vectors EVENTV and KEYV into the AMX ROM, thereby rendering them unavailable for any other use – it's possible to reclaim them by typing *MOUSE OFF.

One of the first uses of the AMX Mouse is in editing programs. *MCURSOR ON allows the mouse firmware to grasp control of the screen cursor. The three mouse buttons can then be programmed using *BUTTONS to emulate any three keyboard keys. The best combination is Return, Copy and Delete for easy editing. This can give you sore fingers, however, as there is no auto repeat facility on the mouse-keys so, for instance, every character to be copied requires an individual button press. Alternatively, frequently used function keys may be selected. Use of *BUTTONS in conjunction with *FX228,1 allows use of the mouse in View.

The mouse is astonishingly sensitive to movement, but the inclusion of a *SENSITIVITY command allows this to be tempered to more humane levels!

Included in the firmware is a set of 64 icons – these are rather like a cross between user-defined characters and sprites. In fact, each icon is constructed

from four characters displayed on a 2 × 2 character grid. Each icon is allocated a number in the range 32 to 95, and may be displayed on the screen using *ICON n, x, y where n is the icon number and x and y the TAB co-ordinates. Figure 1 shows the icons always on tap; these may be added to using the Icon Design package.

Icons can also be used to replace the mouse 'cursor' or pointer, as it is more correctly known. The pointer must first be turned on with *POINTER ON, followed by *POINTER n, where n is the number of the icon to be used. A second parameter may also be specified to allow a background mask to be chosen. The three commands *SHOWPOINTER, *MOVEPOINTER and *HIDEPOINTER allow the pointer icon to be displayed, erased and moved around the screen by the mouse.

Windows may be incorporated into programs by use of the *WINDOW command. This allows multiple text windows to be drawn into the screen, rather as with a VDU28 sequence. A title string may be specified as the last *WINDOW parameter, in which case this will be printed at the top of the window. Any text issued will be directed to the last defined window. This command allows 'pull-down' menus to be created.

Other commands in the mouse vocabulary are *DEFINE, which allows user icons to be loaded into memory; *DESK, which clears the screen to a grey desk-top pattern; and *UPDATE. This command can be used in conjunction with the OSWORD call provided for assembler use to allow the status of the mouse to be read and acted upon.

Inevitably there are drawbacks with the system. It is not compatible with 20K RAM extension boards – the Aries B20, for example – which is a great shame. The system requires a 1.2 OS to be installed, which presumably puts it outside the realm of 1.0 owners. The OSWORD call implemented is call number 64, which is not one designated by Acorn for commercial expansion, and so could mean that the system might not be compatible with future Acorn products.

The manual supplied is too skimpy, and does not include the copious examples it should. It also contains several discrepancies. For example, the command *END is used frequently, but is not documented. The *POINTER command is also referred to as *POINT which, if used, will cause an error.

The manual makes no mention of the fact that the system can only be used to its full potential in modes 0 and 4 – which also means that it is limited to just two colours.

The system is very versatile, how-

ever, and this is best shown in the support packages supplied on tape. The Icon Designer mentioned earlier is a good example. The whole program is written in Basic and allows real time movement of icons around the screen. Using the arrow pointer, icons may be

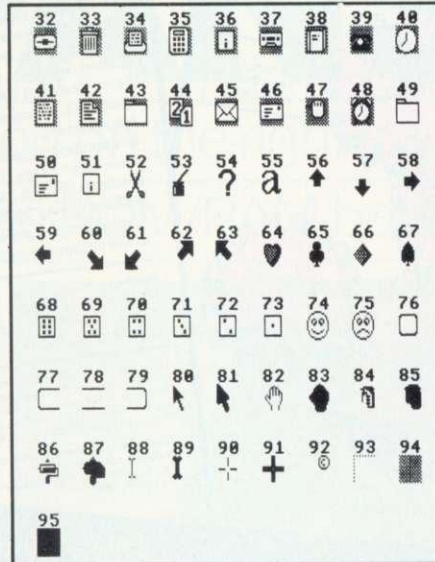


Figure 1. These icons are always on tap

picked up, carried and deposited in the designing area where they are drawn larger than life. Using the pointer and mouse buttons, individual icon pixels may be set or cleared. The finished design may then be carried back down to one of the positions in the file and deposited. User defined icons, which are numbered 0 to 31, may be loaded and saved from or to an appropriate medium.

The AMX Art program is the main software package (produced by Elliot Software) and would merit merchandising on its own. Across the top of the screen are headings, and by moving the pointer to one of these and pressing a button, a pull-down menu will be displayed from which a further selection can be made.

The upper right-hand side of the screen contains the artist's instruments, selected by moving the pointer and pressing the appropriate button, and these include pencil, spray gun, roller, eraser, boxes, circles and text.

Below these are the spray-size boxes which determine the type of spray used by the spray gun.


The bottom section of the screen is given over to the pattern boxes which determine the pattern produced by a spray or fill routine, and include everything from the occasional dot to wicker-work. The AMX Art package is simple to use. The mouse is manipulated to select an instrument which now becomes the pointer, and, if required, the spray size and pattern require-

ments are chosen. The pointer is moved onto the canvas and the fun begins.

A manual is supplied outlining the package and, thankfully, is more informative than the mouse user guide, and provides some excellent examples.

The range of uses for the mouse and AMX Art are wide. After you've got the inevitable initial doodling out of your system, charts, diagrams and more serious art applications are possible.

The system's ease of use is typified by my four-year-old daughter's addiction to the system and I now have to remove her physically from the micro before I can use it! Using the FILE menu option, designs can be saved and loaded to tape or disc or dumped to a printer. Two printer dump routines are included – PRINT × 1 dumps the screen in about 4 × 2 in of paper, while PRINT × 8 uses a whole fanfold sheet of paper. The printer routines are Epson compatible, but there is a further option to enable user dump routines for other printers to be incorporated into the package. A disadvantage of the package is that it is only available for use in mode 4 and is limited to two colours. Also, it is not second processor compatible, as it addresses the

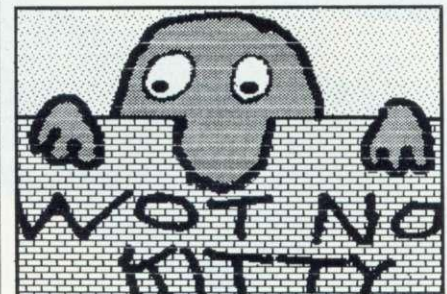

Doodling with the AMX Art program

screen directly to obtain the speed necessary to operate the pull-down menus in real time.

In conclusion the AMX Mouse package is a notable step forward in peripherals for the BBC micro, giving it the potential of operating software in a Macintosh manner.

Educational establishments should find the device a positive aid, allowing the development of easy-to-use software, as the pupil is not inhibited by a traditional keyboard.

Business use is limited until packages that make full use of the mouse's potential become available, but I understand that Advanced Memory Systems will be developing suitable software. As the price is rather high for it to be considered an everyday addition to the home computer system, this may curtail its use by hobbyists. Certainly, though, after discs and a printer, it is worth considering.

Gemini

Business Software for the BBC Micro

Gemini Integrated Accounting for the LARGER business

Designed for the medium to large business where credit sales, invoicing and Stock Control are involved. Gemini Integrated Accounting is suitable for sole traders, partnerships or limited companies. All require a BBC B 32K microcomputer, and an 80 column printer. A double disk drive with an Acorn compatible DFS is required for integrated accounting purposes. A single disk drive may be sufficient where modules are used independently, although this is not recommended for the Sales Ledger and Invoicing module. The manuals indicate the system capabilities for various disk drive combinations.

Why Integrated Accounting?
Because it will retrieve information stored in one program for use by another and store data in one program which has been generated by another.

PRE-PRINTED...
Continuous Invoices, Statements,
Remittance Advice and Payslips
available

Demo Disk £3.00 refundable
on the purchase of any module

**£99.95
per module**



"Gemini have produced a superb product... a superb example of the Programmer's Art!"
Integrated Accounting Suite... A & B Computing December 1984

Gemini Cash Book Accounting for the SMALLER business

Designed for the Cash based business, where credit sales are manual. This system allows any sole trader, partnership or limited company, to transfer all Cash Bank, Petty Cash and VAT transactions onto the book-keeping.

Containing a professional standard manual, it not only "keeps the books", but also produces Profit & Loss Accounts and Balance Sheets DIRECT from your original entries, together with notes to the accounts and comparative figure.

Machine	Product Code
BBC Micro - Cassette	C.0405/6
BBC Micro - 40 Track disk	D.0405/6/40
BBC Micro - 80 Track disk	D.0405/6/80


"Will enable business people with a moderate grasp of accounting principles to produce a set of figures that will satisfy both the Bank Manager and the Tax man"
Gemini Cash Book Micro User August 1983

"Remarkable Software, friendly and well designed, a pleasure to use"
Gemini Cash Book The Scotsman 12 October, 1983

£119.90
cassette/40Tr
80 Tr Disk



Gemini 24K Rom Based Database Management System for ANY business

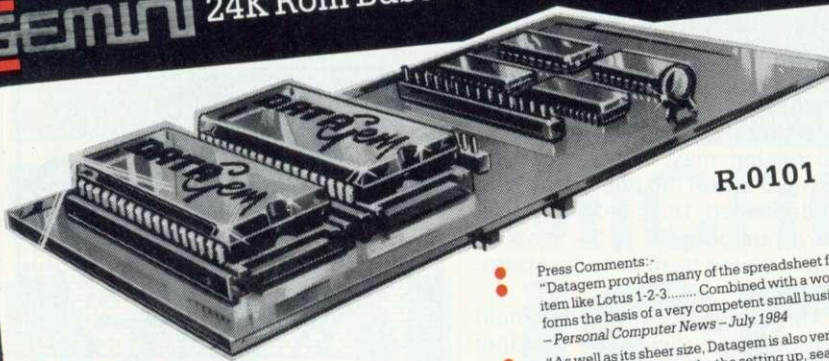

R.0101 **£129.95**

Press Comments:-

"Datagem provides many of the spreadsheet facilities of an item like Lotus 1-2-3..... Combined with a word-processor it forms the basis of a very competent small business system".
- Personal Computer News - July 1984

"As well as its sheer size, Datagem is also very well enclosed with features which make the setting up, searching and out-putting from a database easy and flexible".
- A & B Computing - December 1984

"Datagem stands out in terms of both price and performance"
- Acorn User - December 1984.

- 24K ROM Based Random Access Database with 184 page manual.
- Allows searches on any field or COMBINATION of fields to ANY depth.
- Up to 9 subsets of data INSTANTLY available and saved to disk automatically.
- Sorts alphabetically or Numerically on any field, ascending or descending with NO LIMIT on the depth of sort.
- Interfaces with 'VIEW' and 'WORDWISE'.
- Includes a completely flexible printing format.
- Allows the user to extend the file or add fields after having started to enter data.
- Allows up to 5100 User Definable Records with up to 62 fields per record and a maximum file size of 10 Megabytes.
- Permits just ONE file to exist over FOUR floppy disk drive surfaces.
- Offers a free format painted screen which scrolls 120 x 120, and supports extensive mathematics.
- Provides User defined field relational variables and multiple and single character wildcards.
- Exists self contained on ROM, and does not require additional utilities on disk.
- Finds the occurrence of a string or partial string in ANY field in the database with just one command.
- Price includes 40/80 Track Applications Demonstration Disk
- DFS Compatibility includes: - Acorn 0.9; Acorn 1.2 DNFS; Amcom B; Opus DDOS 3.12, 3.13, 3.14; Watford 1.0, 1.2, 1.4, DDOS; LVL DDOS; Acorn Winchester; S.J. Systems Econet/Winchester (To Order). All other DFS'S conforming to Acorn System Protocol

1. Continuous status messages.
2. Clear, informative menus.
3. Instant Calculators e.g. Age calculated from todays date automatic discounts and VAT calculators..... average exam results pupil/class etc.
4. Extensive Options.
5. Powerful search facilities to update any of the flexible subsets.



AVAILABLE FROM:- Books W.H. Smith and most good software dealers or phone Gemini for prompt despatch quoting your Access, Visio American Express card number. Telephone (0939) 265195. Alternatively make your cheque or Postal Order payable to Gemini Marketing Ltd. and send to Gemini Marketing Ltd., 18a Lintham Road Exmouth, Devon EX8 5QG

Please send urgently CASSETTE/DISK(S) (please delete)

Prices stated include VAT and Post and Packing (UK only).

Name _____ Address _____ Signature _____ Credit Card No. Access/Visio _____ American Express _____

ALL • ABOARD • FOR EXPANSION

Chris Drage puts you on the right track when making your choice from the ROM/RAM boards available

167

SIDEWAYS or paged ROMs are a feature of the BBC micro—you can de-select the Basic ROM in your machine and select one of three ROMs or EPROMs plugged into the sockets under the keyboard.

In practice, the Beeb's operating system (OS 1.2) can cope with up to 16 paged ROMs, and a number of manufacturers have produced add-on boards to extend the number of physical sockets available. Many of the boards on offer allow you to locate RAM (read/write random access memory) as an aid to EPROM development. This 'sideways' RAM takes the place of one or more paged ROM sockets and cannot generally be used for Basic programs. The list of boards in this article summarises the facilities each offers.

The major problem with expansion boards is that the Beeb is not designed to accommodate them, despite being able to cope with 16 paged ROMs. A 12-socket board takes up a great deal of space inside the machine, and when fitted with 12 or more devices it also becomes quite heavy, leading to difficulties if the computer is moved.

Any board covering the Beeb's RAM area may lead to overheating, resulting in the corruption of data or system crashes. Picking up the lines necessary for operation can cause some soldering headaches, although many boards are now of a plug-in-and-go design. Each manufacturer has adopted different solutions to these problems with varying degrees of success.

The major factors to consider when choosing a ROM/RAM board are ease of installation, reliability in operation, physical stability of the board, and your current and future needs regarding sideways firmware

Ramrom 15

At the top end of the market is the all-feature *Ramrom 15* from GCC (Cambridge). This beautifully designed and constructed peripheral which is



The Aries B12—rated one of the best all-rounders


mounted outside the machine is one of the best ROM expansion units available, but at a price! For £129, though, you get a durable, high quality product. The system comprises a ROM board mounted in a steel box, a driver board which lives inside the computer, a 36-page manual and a disc of software to utilise sideways RAM for firmware development.

The Ramrom 15 can accommodate up to 11 ROMs and one area of paged RAM. The four ROM sockets in the BBC are also used, so the total number of available sockets is 16. The system, however, can make use of an infinite number of ROMs when an optional ZIF (zero insertion force) socket is utilised in one of the sockets. EPROMs can then be quickly and easily swapped with little possibility of damage.

It is mounted outside the BBC micro and this certainly has advantages when it comes to installation and chip insertion/removal. The driver board sits in the 6502 socket, and the processor chip is mounted in the corresponding socket on the driver board. There is one flying lead to link S21, then you direct the ribbon cable to the back of the micro, fix the cable clamp and you're in business.

The Ramrom 15 board connects with

the cable via an IDC connector similar to those under the BBC micro, which facilitates the removal and portability of the Ramrom 15. As both the driver board and the Ramrom 15 are fully buffered, no data loss occurs over the lengthy ribbon cable. The metal housing has a hinged lid which can be removed altogether if required. In use or in transit, the board is very secure on the mounting pillars within the case, and no flexing occurs when devices are inserted.

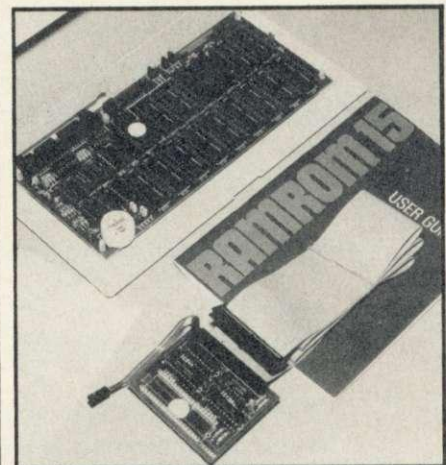

The Ramrom 15—the most expensive board but built to high specifications

When used with sideways RAM the system reveals its advantages. Four slots may be configured as a block of 2, 4, 8 or 16k of static RAM, and these slots are recognised as socket 4. Setting a link enables priority of selection to be assigned to either RAMs or ROMs, thus the RAM location may be switched to the highest priority position. RAM may also be write protected by selecting another link.

Battery backup for the RAMs is provided as standard (typical retention time is two months). The recharging circuitry operates whenever the Ramrom 15 is used, and may be enabled or disabled by setting a link on the board. An optional 5v power adap-

16 SOCKET ROM/RAM EXTENSION BOARD + 32K PLUG IN RAM CARD

Fully buffered the board offers the following features:

All 16 sockets may contain 8K or 16K roms.

Up to two pairs of sockets may be configured to accept 8K eproms to simulate a 16K eprom without the expense of a 27128.

Up to 16K of CMOS RAM type 6116LP (made up of 8 2K ram chips) may be fitted to 8 of the available sockets leaving 8 free for roms.

or 2 8K Ram chips (6264) leaving 14 available sockets.

The advantage of sideways ram is twofold:

1. Programs can be assembled directly to hex 8000 and debugged before being committed to eprom.
2. Programs intended for sideways roms may be stored on disc and downloaded into ram. Many more programs may be kept on disc allowing the extension board to be fitted only with roms that need to be resident.

This is a high quality PTH board and plugs into the extreme right hand rom socket.

4 wires to the paging register and one lead to the R/W line have to be connected.

BATTERY BACK-UP FACILITY Separate power leads for the board


are used to eliminate possible crashes that may occur due to trying to draw up to 650mA from a sideways rom socket.

Board fully assembled and tested complete with full installation and operating instructions.

Cost £32.00 + VAT, £1.00 P&P

Also available: 32K plug in RAM card. Will fit directly into ROM socket on above board.

HCR ELECTRONIC SERVICES
THE INDUSTRIAL UNIT, PARKER ROAD
CHELMSFORD, ESSEX CM2 6ES
Tel: Chelmsford (0245) 350188

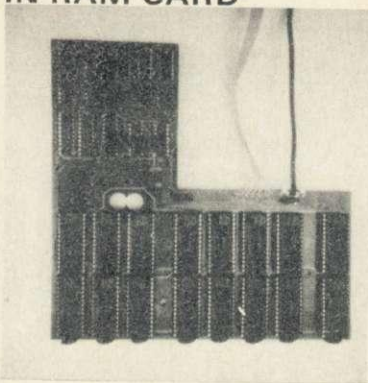

EXTERNAL RAM/ROM CARD

THE NEW EXTERNAL 28 ROM EXPANSION SYSTEM FROM HCR ELECTRONICS

This extremely powerful but versatile machine has the capability of: 32K RAM & 24 sockets available for ROM or many various combinations to your personal requirements.

This machine has its own separate power supply which eliminates drain on the BBC's switched mode supply.

NO SOLDERING IS REQUIRED.

- The unit consists of two modules:
1. An adaptor board to plug into the BBC sideways Rom socket 15.
 2. The expansion case.

The case comes complete with an inbuilt power supply and one expansion card. This card will hold 12 Roms or a combination of Ram/Rom (Ram can be 6116's, 2016's or 6264's). This gives a total of 16 Roms (including four in machine). A second board identical to the above can be fitted at a later date, giving a total capability of 28 available sockets for Rom or Ram. The second board can be selected as an alternative to the first board, either by a switch on the case or via software control.

SOME ADVANTAGES

1. No soldering required.
2. No access into machine required after initial fitting.
3. No overheating problems.
4. Does not physically interfere with other internal expansion add-ons.
5. Built in power supply (does not overload BBC's supply).
6. Computer will still function with external box powered down or unplugged (using Roms resident in machine).
7. Will make available 32K Ram plus 24 Rom sockets at a varied combination to the customer's needs.

Cost unit complete with one board £75.00 + vat.
Second board £29.00 + vat. Postage & Packing £3.00



The Ultimate Tape to Disc System....

THE MOST EFFECTIVE TRANSFER UTILITY CURRENTLY* AVAILABLE,
OR YOUR MONEY BACK!

...for BBC 'B'

This system is ROM based and has the following features:

- Instant access.
- Allows use of all available RAM, (&4000 to &7FFF).
- Can handle any length of program.
- Can handle any number of programs.
- Can save to any disc.
- Very user-friendly, (menu driven).
- Contains two transfer routines to ensure effective loading of all but a few currently available software tapes.
- Adventures normally taking six minutes to load will now take about five seconds.
- The system automatically switches to TAPE filing after loading, so that you can still load/save games positions, etc.

***** PRICE £18.00 (including V.A.T. and post) *****

At present available for the BBC 'B' O.S. 1.20 with single density interfaces using the standard 8271 chip (e.g. Acorn, Amcom S/D, Watford S/D).

* Month of issue.

N.B. This ROM solely provides convenience in loading, and does not break software protection.

Also: The **ADDCOMM** ROM
40 new commands for the BBC 'B' O.S. 1.20 and Electron computer with ROM board. GRAPHICS, TOOLKIT, LOGO GRAPHICS and GENERAL PURPOSE statements all on one ROM.

£28.00 with 72 page User Guide, (including V.A.T. and post).

Or send stamp for detailed brochure.



Available from:

VINE MICROS, MARSHBOROUGH,
NR. SANDWICH, KENT,
CT13 0PG.

(Or your local Computer Dealer)

tor (£5.75 inc VAT) may be used to power the board if required. A red LED indicates that the board is 'on'.

Expensive it may be, but for those who want an expansion board of the highest specification, the Ramrom 15 will not disappoint. It seems to work happily with almost any other expansion options, eg, the Aries B20 video RAM expansion board and double density disc controllers.

Exprom

The Exprom successfully combines both external and internal mounting, and its design and construction are of a very high standard. If it's facilities you want from your ROM board then the Exprom has more options than any other board I have seen. Up to 16k of paged RAM is available in socket 0. This is really four contiguous sockets which may be populated with various 2k and 8k RAM chips and/or EPROMs in a number of combinations; 2, 4, 8 or 16k

EPROMs may be used in any of the sockets. A maximum of 16 devices may be accommodated, with a link for each socket to enable a 'wait state' for EPROMs slower than the normal 250ns.

The standard board has two toggle switches mounted on its rear edge, which allow sockets 14 and 15 to be disabled. A further two switches, to disable sockets 12 and 13, may be added at the time of purchase, and these protrude through the rear ventilation slot in the BBC micro. As a further option, a ZIF socket may be mounted in socket 4 position to allow EPROMs to be inserted without risk of damage.

Installation requires the 6502 to be mounted on the Exprom board. It is replaced by a DIL header plug and a ribbon cable connected to the Exprom board. One flying lead is connected to the S19 link on the BBC board. The Exprom board is provided with two sets of pillars, and when mounted internally, is extremely stable. Four pillars

may be placed on the Beeb's lid to facilitate external mounting. The instructions in the excellent 21-page manual are comprehensive and clear.

My only criticism of this otherwise superb board is the slight difficulty encountered in removing ROMs, due to the number of links nearby. However, the use of turned pin sockets makes the task reasonably straightforward. Overall, the Exprom expansion board is a high-quality product at a reasonable price, and should be considered even if you do not need all the extra facilities.

Midwich

One of the least sophisticated ROM boards comes from the Midwich Computer Company. It provides 16 ROM sockets but no RAM options, and is long, narrow and tends to flex when ROMs are inserted. As it is mounted under the keyboard edge, it successfully avoids the Beeb's RAM area.

Installation can be rather difficult as

169

WHAT THEY OFFER

	RAMROM 15	EXPROM	ALTAIR APEX	ARIES B12	RAMAMP	MIDWICH
RAM or ROM	RAM/ROM	RAM/ROM	RAM/ROM	RAM/ROM	RAM/ROM	ROM
ROM sockets available	11 or 10 + 1 RAM position (plus 4 on BBC board)	16 or 15 + 1 RAM position. Wait states may be selected for 'slow' EPROMs	11 + 2 RAM positions or 12 + 1 RAM position (plus 4 on BBC board)	12 (socket 0 reserved for RAM)	6 (plus 4 on BBC board)	16
RAM available	2k, 4k, 8k, 16k options + rechargeable battery back-up and several configurations (separate power supply available)	2k, 4k, 8k, 16k options (able to be mixed with EPROMs)	16k as 2 × 8k CMOS (6264) static RAMs 8k as 1 × 8k CMOS RAM. rechargeable battery back-up	16k as 2 × 8k CMOS (6264) static RAMs or 8k as 1 × 8k CMOS RAM chip	16k or 32k dynamic RAM on board	—
Installation	Plug in driver board (main board external)	Plug in (may be mounted externally)	Plug in (internal only)	Plug in (can be mounted externally). CPU carrier board £5.75 extra	Plug in (internal)	Plug in (may require soldering) internal
Price	£129	£59.95 (basic) £80.50 (fully expanded)	£57	£46	£56 (16k RAM) £67 (32k RAM)	£27
Software provided	6 utility programs	—	—	—	10 utilities	—
Available from	GCC (Cambridge), 66 High St, Sawston, Cambridge CB2 4BS	Anderson Electronics, 2 Hollin Park Rd, Calverley, Pudsey, West Yorkshire LS28 5PU	Altair Electronics, 1 Cherry Walk, Hayes, Bromley, Kent BR2 7LT	Aries Computers, Science Park, Milton Road, Cambridge CB4 4BH	Twillstar Computers, 17 Regina Road, Southall, Middlesex	Midwich Computer Co, Silray Road, Diss, Norfolk IP22 3EU

HOW THEY SCORE

	Ramrom 15	Exprom	Aries B12	Altair Apex	Ramamp 32k	Midwich
Design	5	5	4	3	4	2
Construction	5	5	5	4	4	2
Ease of Installation	5	4	4	3	4	2
Ease of chip removal/insertion	4	3	4	3	4	2
Versatility	5	5	4	3	5	3
Software provided	4	—	—	—	5	—
Documentation	5	5	5	3	3	2
Value for money	4	5	4	4	5	2
5 Excellent, 4 Good, 3 Satisfactory, 2 Poor, 1 Very Bad						

the board is located in both the right hand ROM socket and the IC76 socket. If, like mine, your IC76 is well and truly soldered in, you have a choice—take your computer to a dealer or attempt a major soldering job with its risks.

No manual is provided, just the briefest of instructions on the back of the box. However, a spare 74LS163 chip and its socket are included. As each ROM socket is located very close to its neighbours, I encountered further problems when removing ROMs from the middle of the board.

For anyone who requires a ROM expansion board with no frills and has IC76 socketed in his/her computer, then the Midwich may be the answer, but I find the design and quality of this board leave a lot to be desired.

Altair Apex

The Altair Apex board also accommodates 16 devices, but unlike the Midwich, it utilises the Beeb's four resident sockets. The 13 sockets available may be configured as 12 ROMs and 8k of RAM, or 11 ROMs and 16k of RAM. Only 8k devices may be used, occupying the lowest priority sockets (0a + 0b). The BBC micro's ROM sockets take the highest priority.

The Apex plugs directly into the 6502 CPU and 8271 FDC (floppy disc controller) sockets. These two ICs are then inserted into corresponding sockets on the Apex. Four flying leads are connected to links S20, S21 and S22, and four power leads on the BBC's board need to be carefully bent down to accommodate the Apex. This rather awkward method of connection could be avoided if a pair of 40-pin sockets were inserted to raise the expansion board slightly. As a good portion of the board lies over the Beeb's RAM area, additional sockets would also help minimise overheating.

The lack of a rear support results in instability when inserting chips, and I

found that the 40-pin sockets tend to spring out at the front. As the Apex board occupies so much space, there may be no room left for other expansion options like video memory boards or double density disc controllers.

The rechargeable battery back-up facility is certainly a big plus for this board. The RAM locations can also be latched for read/write operations using a *FX call. An optional LED glows red/green alternately to indicate the RAM's status. Documentation—five photocopied pages—is just adequate.

Aries B12

The Aries B12 package comprises two boards—a ROM carrier and a buffering/decoding board. A CPU carrier board is also available for an extra £5.75 if you do not have an Aries B20. The quality of the design and construction is high and the system uses a plug-in-and-go approach.

The CPU is removed and inserted on the B20 (or alternative carrier board). The buffering/decoding board straddles the Beeb's sideways ROM sockets and the B12 may be mounted either externally or on the underside of the computer's lid. Twelve ROM sockets and 16k of paged RAM are provided on the ROM board. The BBC's four ROM sockets cannot be used. Sockets 0a and 0b on the B12 provide space for 2 × 8k CMOS RAMs (the lowest priority position).

The strengths of this system lie in its ease of installation, reliability, sensible number of ROM sockets and its ability to interface with the Aries B20 video RAM expansion board. In this configuration the system represents an excellent and cost-effective means of upgrading the Beeb's RAM and sideways facilities—an attractive alternative to the 6502 second processor. A recent development has been the production of a modified buffer/decoding board to allow a Solidisk 32k sideways

RAM board to be included in the B12/B20 combination.

If you wish to use sideways RAM to the full, any of these boards represent an expensive option. Two 8k 6264 CMOS chips will set you back a cool £50–£60 for the privilege of one 16k sideways RAM location. It is here that the Ramamp boards score heavily.

Ramamp

Using a configuration of 16k or 32k of dynamic RAM, Ramamp offer two boards and each represents a low-cost means of obtaining sideways RAM. Six on-board ROM slots, plus the four in the Beeb, give a maximum of 10 ROMs. This deliberate policy of Ramamp Computers ensures the Beeb's power supply is not overtaxed, thus enabling a disc drive, an Aries B20 board or a user-port peripheral like the AMX Mouse to be driven reliably.

The board sits in the OS 1.2 socket, this chip being moved onto Ramamp's corresponding socket. Installation is a simple matter of plugging two flying leads into link S21 and the Tube socket respectively (people with second processors will have to make other arrangements for the Tube connection). Like the Midwich board, it sits just below the edge of the keyboard, thus avoiding the Beeb's RAM area.


The Ramamp board proved very flexible in use. The comprehensive range of software provided makes full use of the one or two RAM slots available. The RAMPDFS and printer buffer programs proved very useful. The former program sets PAGE to &E00 for disc users, reclaiming 2.8k of memory. The latter programs set up 15k and 7k printer buffers respectively. The 7k buffer is very clever, utilising the 'top' 8k of a RAM slot already occupied by an 8k language ROM.

Ramamp Computers has produced two excellent boards which give a near-perfect solution if you require sideways RAM for your language firmware, but also want a number of service ROMs permanently present in your machine.

Making a choice

All the boards discussed provide various solutions to the BBC micro's lack of ROM sockets. My choice? It is hard to separate the Ramrom 15, Exprom, Aries B12 and the Ramamp 32k, as each is an excellent product. Perhaps the Aries B12 and the Ramamp are the best all-rounders, though the Altair Apex is worthy of consideration if battery back-up is important to you. The Ramrom 15 and the Exprom are in a class of their own, but you must judge whether you are likely to make sufficient use of the extra facilities to justify the additional cost.

Cumana, now the best name in sight.

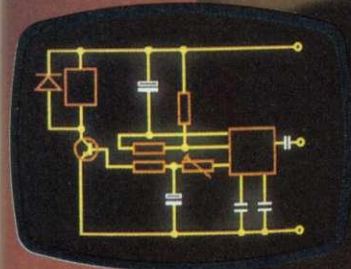

*Cumana's
touch pad*

Cumana, the best name in memory for a range of disk drives, now introduce the first of a new range of computer products. A low cost and fully guaranteed graphic plotting aid for the BBC Micro. This compact display cursor moving device simplifies programming with the touch of the stylus. The product comes complete with a programming instruction booklet and has uses in graphics, computer aided design, education and games.

- Mouse substitute
- Smart keyboard supplement
- Education
- Flexible numeric keypad
- Graphic input device
- CAD/CAM system
- Only £69.95 inc. V.A.T.



Cumana Limited, Pines Trading Estate,
Broad Street, Guildford, Surrey, GU3 3BH.
Telephone: Guildford (0483) 503121
Telex: 859380

QUALITY NEVER LOOKED SO GOOD—

Now everyone with a BBC or IBM PC will want to get their paws on CUB's sleek new D series plastic cabinet — a triumph of ergonomics and up to the minute design. Within it is the CUB 653 MEDIUM RESOLUTION colour monitor — the perfect mate for computer users who wish to combine the advantages of brilliant, low cost colour graphics with 80 column processing software.

CUB 653's remarkable depth of colour is enhanced by minimal screen glare, thanks to a super high contrast CRT. Even in well lit environments the 653 (H) X 585 (V) resolution and 0.43mm dot pitch produces 80 column text which is pin-sharp and easy to read. Owners of SHARP, RML 480Z, APPLE Series, WANG and other leading computers needn't feel left out, because CUB 653's compatibility extends to these models and many more.



PICK ONE UP FOR JUST £299 inc. VAT

NEW LOW PRICE, NEW PLASTIC CABINET — THERE'S NEVER BEEN A BETTER TIME TO BUY.

Standard Resolution version also available in new cabinet. Both Standard and Medium resolution models produced in metal cabinets if required.



MICROVITEC 653
CUB
COLOUR DISPLAYS

Microvitec PLC, Futures Way, Bolling Road, Bradford, BD4 7TU, West Yorkshire.
Tel: (0274) 390011 Telex: 517717

Available from High Street Computer Retailers and selected branches of W. H. Smith, Harrods, John Lewis Partnership, John Menzies with selected models available from larger branches of Boots.



NEW 16k EPROM

***HEX**, Is a full HEX dump, displaying 8 bytes of HEX and ASCII equivalent per line. A status line shows the current address and the byte at this address in:- HEX, ASCII, Decimal and either the binary, basic token or assembler mnemonic. Forward and reverse scrolling of the display at normal and

high speeds is a feature, as is a full on screen memory editing facility which allows inputs in either hexadecimal, ASCII characters or assembler mnemonics.

***MON**, Serves the same function as *HEX, but the display is in disassembled opcodes, rather than *HEX. The editing and scrolling facilities are the same as for *HEX. An additional feature of *MON is the ability to directly follow JSR's, branch's etc.

***DEBUG**, A full featured program debugging aid, allowing the programmer to see the most intimate details of the program under examination. Features, variable speed, single stepping, breakpoints, continuously updated disassembler, selective HEX dumps (up to 6) plus current stack, all continuously displayed on screen, plus many other features.

***DISCED**, A comprehensive disc sector editor enabling any sector of a disc to be read, inspected, edited and written back. It will work with any 40, 80 or dual formatted single density disc.

***DGET**, Searches a disc for all occurrences of a string or group of bytes.

***REL**, Enables machine code to be easily moved around in memory, automatically adjusting JSR's, JMP's etc.

***SLOW**, This command causes the entire computer to slow down to any variable speed between 1 and 255. This can allow the in depth study of graphic's methods etc.

***EDIT**, A dynamic basic screen editor, cursor controlled with full forward/reverse scrolling of listing, incorporating insert/delete lines, insert/overwrite characters, enter line from any position after editing.

"No need to Sweat! Let me be your slave."

***REF**, Produces a cross-reference listing of the current basic program. All variable names are listed (WITHOUT HAVING TO RUN THE PROGRAM!) in alphabetical order followed by the line numbers on which they are referenced. Numeric items can also be crossed referenced if desired.

***SORT**, A built in sort routine allowing any single dimension array, be it integer, real or string, to be sorted.

BASIC COMMAND LIST:-
*PROG, *BAD, *EXTEND,
*PACK, *SORT, *PAGE,
*ENVELOPE, *FIND,
*REPLACE, *XREF,
*TRON, *TROFF, *CHAR,
*EDIT, *EDKEY.

**MACHINE CODE
COMMAND LIST:-**
*MCODE, *MOVE,
*CROM, *SLOW, *GET,
*PHEX, *GO, *MON,
*HEX, *SPACE, *DGET,
*DISCED, *DIS, *DEBUG,
*CRC, *REL.

Designed with the serious programmer in mind, a 16K Eprom packed with a multitude of programmer friendly utilities, as with all **SLAVE'S**, SLAVE is instantly available and will obey an extensive range of commands. So why not invest in more muscle for your BEEB, and get some help with the heavy work!!! SLAVE has over 30 comprehensive machine code and basic tools.

"The Slave Drivers Guide."

**A&F Software Ltd.,
Unit 8, Canal Side Ind. Est.,
Woodbine St East,
Rochdale OL16 5LB**

**24 hrs HOTLINE
0706 341111**

Slave is available direct from A&F Software Ltd for only £49.95. This includes post, packing, VAT, and User Guide.

Please send me a Slave, I enclose my cheque/PO for £49.95.

Cheque N°. _____ Please debit my _____
Access/Visa N°. _____

Name _____

Address _____

Telephone: _____



Remittance to:-
**A&F Software Ltd.,
Unit 8, Canal Side Ind. Est.,
Woodbine St East,
Rochdale OL16 5LB**

Please allow 14 days for delivery.

Any improvement on Britain's No.1 word processing ROM...

WORDWISE was the very first ROM based product to be made available for the BBC computer and over the last couple of years it has become the most popular word processing system for the BBC machine with almost 50,000 chips now sold.

It has consistently received excellent reviews for its ease of use and speed. It takes only minutes for the user to become familiar with a powerful professional word processing system.



WORDWISE PLUS is now available extending

the original program in many unique directions. Not only is the program now twice the size but the package includes two completely new manuals—an introductory manual that gently introduces the newcomer to word processing with **WORDWISE**, and a reference manual listing all the commands.

THE WORDWISE PLUS PACKAGE CONTAINS

- 1 16K ROM
- 2 SPIRAL BOUND REFERENCE MANUAL (180 pages)
- 3 INTRODUCTORY MANUAL (56 pages)
- 4 KEYSTRIP
- 5 TYPING TUTOR PROGRAM (On cassette)
- 6 EXAMPLE TEXT (On cassette)
- 7 EXAMPLE PROGRAMS enabling mail merging, index generation, etc.

WORDWISE PLUS is completely compatible with all older versions and is able to use existing **WORDWISE** files without modification.

WORDWISE PLUS FEATURES

Over the last couple of years we have received countless suggestions for ways of extending or adding new facilities to **WORDWISE**. It soon became obvious that we would not be able to implement every single suggestion. Indeed, each person uses a word processor in a different way—each individual has differing requirements—a feature that one person may think essential another may have no need for.

We have overcome this problem in two ways. Firstly we have included the most commonly requested additions and improvements. A number of new editing features and a few more embedded commands have been added.


Secondly a unique BASIC-like programming language has been incorporated. This facility enables the capabilities of this word processor to be extended in an infinite number of ways.

The language itself has been designed, like **WORDWISE**, to be simple to use and understand. Many of the commands look and act like BASIC commands and so will be familiar to many users. However the language can control and use all the functions of the word processor and can control any aspect of **WORDWISE PLUS**.

There are over 95 commands and functions in the language alone, including numeric and string variables and random access file handling. Up to 10 separate programs may be held in memory at once and of course all the normal **WORDWISE** editing facilities are available to enter and alter the programs.

At the simplest level this language could be used to add new editing features. However more complex and powerful programs can of course be written. Four useful examples are supplied with the **WORDWISE PLUS** package.

- 1) A mail merging program.
- 2) An index generating program.
- 3) Two column text printout.
- 4) Continuous processing.

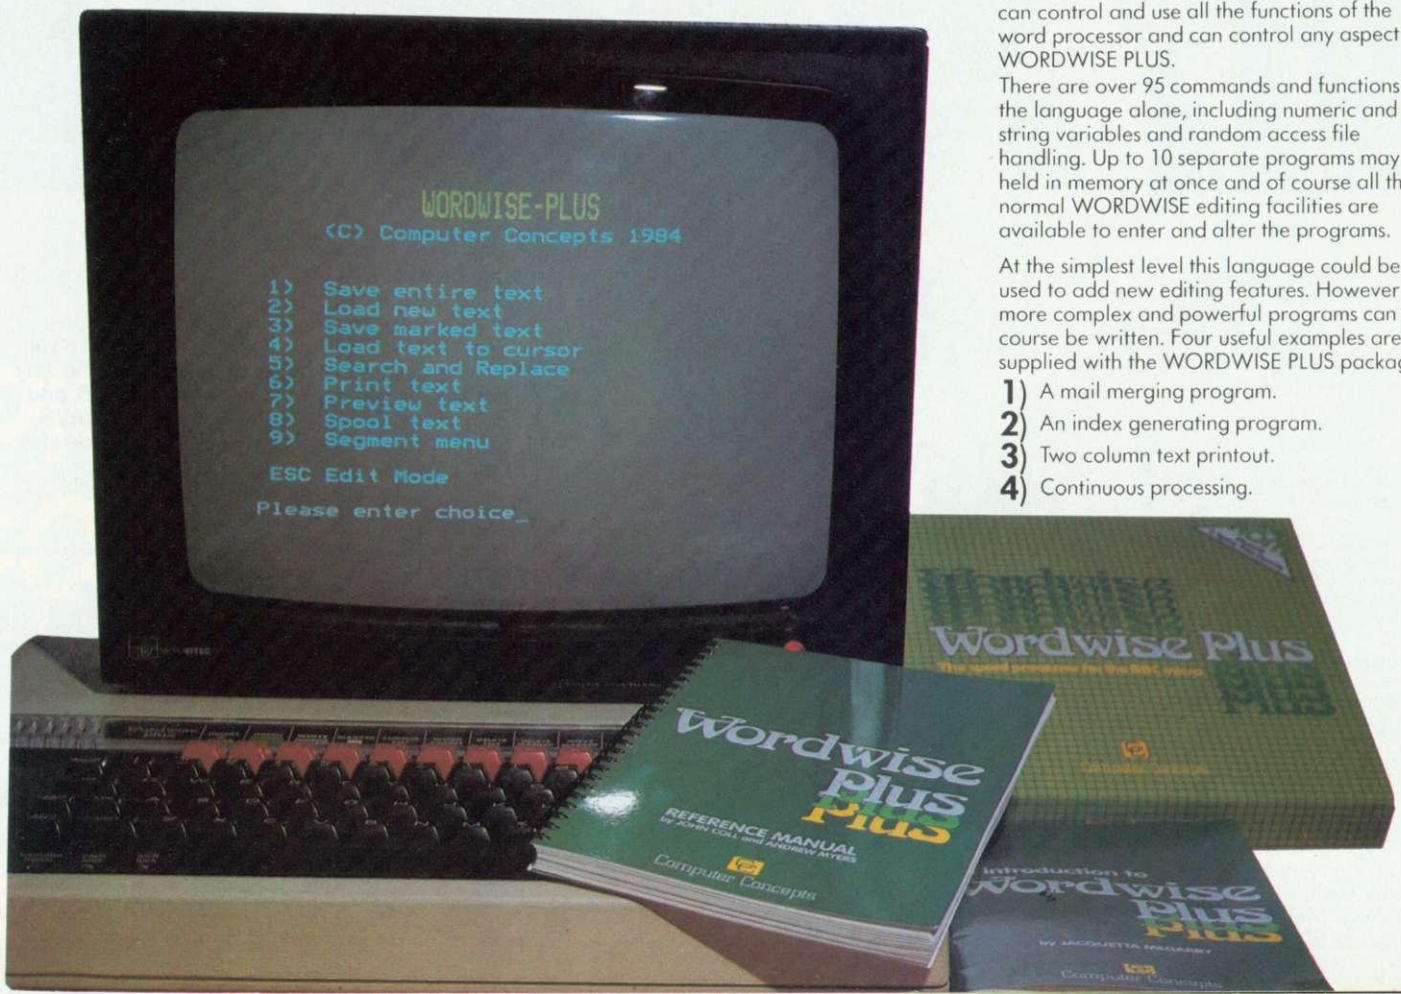

...Must Be A Plus

Word Processing With Wordwise

All the advantages of a ROM—instantly available. One command and your BBC machine becomes a powerful word processing system.

Fast and very simple to use.

The more complex commands are menu driven, enabling those totally unfamiliar with this software to use these more powerful features straightaway.

The function keys are used to full effect with a keystrip clearly showing each function.

Block copies and moves. It is possible to mark any part of your text, this marked section may be instantly moved or copied to any other part of your text. This cut and paste type of operation is a vital part of all word processing operations and with WORDWISE it is simplicity itself.

Automatic headings, footings and page numbering. When printing a document many pages long it is possible to have WORDWISE number the pages for you and put any heading or footing line on each page.

Unique word counting feature. Ideal for journalists, it constantly displays the current number of words typed. It also allows word counting for specific sections of a document.

Works with all filing systems, such as DISC., CASSETTE., and the new ADFS. Works with any printer that works with the BBC machine (most do) and is able to access the special features of any printer (italic, subscripts, etc.). There is no need to buy additional printer driver programs.

Here are a few of the things that have been said about WORDWISE.

"WORDWISE offers an extremely user friendly program... it would make an excellent choice for someone rather apprehensive about word processing."

... E & CM

"WORDWISE has won a devoted fan club because of its flexibility and ease of use."

... Practical Computing

"On the whole WORDWISE is an excellent wordprocessor... WORDWISE is thoroughly recommended."

... VIEWFAX 258

"WORDWISE is straightforward, friendly and excellent value."

... Practical Computing


"... it is ideal for the home hobbyist and small businessman."

... A & B Computing

Word Processing with Wordwise Plus

WORDWISE PLUS still has WORDWISE as its core therefore it is still very user friendly and retains all the features that made WORDWISE the most popular word processor. It now has many new additions making this the most flexible word processor yet.

WORDWISE will continue to be sold alongside WORDWISE PLUS. For those more specialised users who require the added flexibility here are a few of the new features.



Segments

When using WORDWISE PLUS, the BBC's memory is divided between your text and up to 10 'segments'. Each segment may contain either a program or just normal text. It is therefore possible to store and edit up to 11 separate documents in memory, or 1 document and 10 programs, or any mixture.

Often when writing letters or articles it is useful to keep a notepad, outlining what you intend to write. In WORDWISE PLUS one of the segments could be reserved for an electronic notepad. It would be a simple matter to switch your 'notepad' and your main document with just a single key press.

Some of the New Editing, Embedded Commands and Wordwise Extensions

WORDWISE PLUS works with the 6502 2nd processor. This allows more text to be stored in memory and 80 column previewing no matter how full memory is.

New embedded command FI will fully indent text against the right margin.

New commands for underlining and bold printing. The bold and underline effects are shown on screen—and it is a simple matter to configure these features for any printer.

Saving and loading of text is now up to 10 times faster on disc, and now the computer gives the user a warning if a document is going to be overwritten on the disc or in memory.

There is now a working filename—i.e. WORDWISE remembers the name of the current document being worked on.

New command deletes markers automatically.

It is now possible to print or preview a file directly from disc without having to load it first.


New embedded command 'PS' allows strings to be inserted into the text when it is printed.

New embedded command 'PF' will read a document from file when printing and interpret any embedded command in that file.

Improved search and replace facilities now include wild-cards.

Example Programs Supplied With Wordwise Plus

- 1) A mail merging program that allows names and addresses to be added to a standard letter. This is a relatively easy job with this language.
- 2) An index generating program. This finds keywords and generates a separate index listing the word and the page numbers where the keywords occurred.
- 3) Two column printout. This program will print your text in two columns across the page.
- 4) Continuous processing. This enables the disc user to process and edit extremely large documents spread over several files as if it were one continuous document in memory.

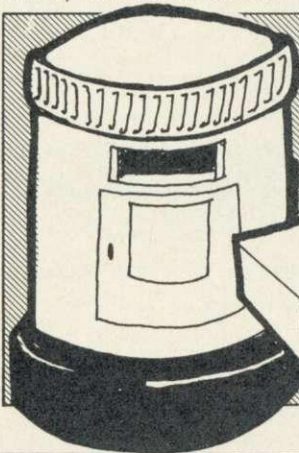

Upgrades

WORDWISE PLUS for only £17+VAT

Existing users of WORDWISE can upgrade to WORDWISE PLUS for £17+VAT (£19.55). We are only able to offer this service through ourselves at the address below. Please return the old WORDWISE package complete with chip (suitably protected for postage) and the manual with your cheque or P.O. or quote your Access or Barclaycard number. We will then send you the complete new package.

In The Near Future

HI-WORDWISE for 2nd processors that allows even more user memory, supplied on disc for less than £5 to WORDWISE PLUS owner.

A FAST SPELLING CHECKING PROGRAM.

Both WORDWISE and WORDWISE PLUS are available from all good computer dealers. Alternatively you can obtain these directly from Computer Concepts.

WORDWISE PLUS £49+VAT (£56.35)

WORDWISE £39+VAT (£44.85)



Computer Concepts

Computer Concepts, Gaddesden Place,
Hemel Hempstead, Herts HP2 6EX
Telephone: (0442) 63933



SMART WAYS TO DRIVE YOUR MODEM

176

Jeff Ashurst follows up his review of modem hardware by assessing some of the software support around

YOU NEED software to drive the modems reviewed in the February issue, and this month I'll look at what facilities such software offers and to what degree it is portable.

Dumb

So-called 'dumb' terminal software, as its name implies, does not perform any fancy tricks – it simply takes characters from the keyboard buffer and directs them to the RS423 output buffer. It also brings incoming characters from the RS423 input buffer and displays them on the screen. This is the minimum – and the cheapest – requirement for communication. Typical uses of a dumb



routine are user-to-user dialogue with another modem owner and message-swapping through a bulletin board.

This type of program is a good way to start if you're not sure what other facilities you might need. Various publications have carried listings of such routines for you to key in, and books are another source. Two I can think of off hand are those by Paul Beverley in *Acorn User*, November 1982, and by Mike James in his book *The BBC micro – an expert guide*.

You could, of course, write your own – it's not all that difficult if you know a few things about programming.

Smart

Intelligent or smart software offers facilities in addition to the straightforward reading and writing of characters.

You'll find a list of features in the packages reviewed in the summary tables, and these include protocol selection, the use of a buffer area in memory, uploading and downloading programs and file transfer with sophisticated error-checking techniques.

Two of these concepts are fundamental to the action of smart software. First the use of a buffer, which is normally all the free memory. Instead of all the communication process being an interactive, on-line affair, the buffer area is used as a clearing house for information. The information is handled

as a file – and this is the second concept. A file is simply a collection of characters; it can be a program, a message or document, a standard series of responses to log-on to a host system or anything else you choose.

Some software goes further and also incorporates configuration commands for specific modems. Thus in some cases the connection from the RS423 interface to the modem (see figure 1, page 169, February issue) is not only used for data, but also for instructions between the computer and the modem. The SCM-100 reviewed keeps these

HOW THEY SCORE

	Acorn	Commstar	Modrom	Watford	OEL	Protek
Range of features	9	9	6	5	5	6
Documentation	8	9	6	5	4	1
Messages/Prompts	9	7	8	5	7	5
File/Program send	—	9	—	8	5	5
Prestel capability	9	7	7	—	—	5
Overall usability	8	8	7	6	5	5
Total (out of 60)	43	49	34	29	26	27

SUPPLIERS AND PRICES

Watford User-to-User Rom (£18 plus VAT)

Watford Electronics, 250 High Street, Watford, Herts. Tel: (0923) 40588/37774.

Modrom*

Loco Systems, 5 Stainton Walk, Goldsworth Park, Woking, Surrey GU23 1JB. Tel: (04862) 4480.

Acorn's Prestel ROM (available only as part of a package with the Prestel Adapter at £113.85 inc. VAT)

Acorn Computers, Fulbourn Road, Cherry Hinton, Cambridge CB1 4JN. Tel: (0223) 245200.

*We cannot give a price for this product as we have been unable to obtain a reply from Loco Systems' phone number

Commstar (£29.57 plus VAT)

Pace Software, 92 New Cross Street, Bradford BD5 8BS. Tel: (0274) 729306.

Protek's BBC Modem Pack (£19.95 inc. VAT)

Protek Computing, 1A Young Square, Brucefield Industrial Park, Livingston, West Lothian EH54 9BX. Tel: (0506) 415353.

OEL User-to-User Software (£19.95 inc. VAT)

OEL, North Point, Gilwilly Industrial Estate, Penrith, Cumbria CA11 9BN. Tel: (0768) 66748.

functions separate by sending instructions via the BBC micro's user port. Any software which configures the hardware as well as handling the data is arguably more sophisticated, but on the other hand it is not likely to be com-



patible with any modem other than the one it was designed for.

It would be simplistic to judge the software on an 'A is better than B' level. It's more realistic to consider A and B as different, and then decide, on the basis of features provided and method of operation, which is the most suitable for a particular application.

Interface standards

As with the modem standards, different interface standards have been adopted by the United States from the rest of the world. Fortunately, compatibility between the two sets of interface standards is better than that between modems, and probably more people in the UK are familiar with the US terminology than any other.

The world standards are laid down in the list of Consultative Committee for International Telegraph and Telephone (CCITT) V-series recommendations. Standard V24 defines functional details and V28 and V10 specify electrical characteristics. In the US member manufacturers make up the Electronics Industries Association (EIA), which publishes, through its Technical Committee TR30, its 'Recommended Standards, the RS series. These standards equate thus:

V24 + V28 = RS232 - C

V24 + V10 = RS423 - A

Both RS and V-series standards specify signals on 25 pins at the interface, but in practice this is implemented by only a few manufacturers of popular micros.

So 'compatibility' has a fairly loose definition when applied to communications.

XON/XOFF and XMODEM

A few words now about the X's. 'XON' and 'XOFF' are simply communications jargon for the signals which instruct the other end to recommence or stop transmitting. They are the ASCII codes generated by the key combinations CTRL-Q and CTRL-S respectively, and can be sent as such. You send them from the keyboard to make an incoming file pause while you read the screen, and smart software sends them auto-

matically to control flow as your computer's RS423 input buffer empties and fills.

'XMODEM' is a sophisticated error-checking file-transfer protocol developed by Ward Christensen, initially for use with CP/M systems. A file is transmitted in blocks, together with a checksum calculated for each block, and at its destination the checksum is again calculated, based on the data as received. If the two do not match, the block is automatically requested again. This process is repeated, if necessary, up to ten times, after which the sender is given the option to retry or quit. XMODEM can ensure successful file transfer under extremely adverse conditions. If your software has this facility, you can use it with other terminals or hosts which support this protocol, such as terminals running similar software,

bulletin boards and CP/M systems.

Calls

Two of the routines in ROM to access Prestel use the same call - *PRESTEL. It is, of course, unlikely that you would have two viewdata ROMs installed in everyday usage, but the problem of clashing call names could well occur between other ROMs. It's worth noting, therefore, that there is a simple way of choosing your ROM by de-selecting the others. The command $?(673 + n) = 0$ will disable ROM socket number 'n'. In a standard model B the four ROM sockets are numbered 15, 14, 13 and 12 from right to left looking from the front of the computer, with priority from the right. As an example, to disable ROM socket 14 you should issue the command $?687 = 0$. The socket remains disabled until the Break key is pressed.

177

	Commstar	Modrom	Watford
set word format	●		
set transmission speed	●	●	
set on/off - echo	●		
filter	●		
line feed	●		
printer	●		
clock	●	●	
buffer - copy to	●	●	●
load	●		●
output	●		●
save	●		●
reset pointer	●		●
view	●	●	
wipe	●		●
disc/buffer option	●		
chat mode	●	●	●
copy mode			●
select screen mode	●	●	
XON/XOFF protocol option	●	●	
file transfer in XMODEM	●		
terminal emulation	●		
modem test sequence		●	
auto dial with repeat		●	
auto answer		●	
accept MOS commands	●	●	●
handle wp files	●	●	●

Table 1. What the terminal/user-to-user ROMs offer

	Acorn	Commstar	Modrom
auto dial	●		●
auto repeat dial			●
save frame to disc	●	●	●
tag/retrieve frame	●	●	
hold frame but log-off	●		
send Escape	●	●	●
edit frame	●		
prepare message off-line	●		
download telesoftware	●	●	●
accept MOS commands	●	●	●
use f-keys for commands	●	●	●

Table 2. What the Prestel ROMs offer

Table 3. What the cassettes offer

	OEL	Protek
Prestel access		●
user-to-user	●	●
chat mode		●
copy mode		●
accept MOS commands	●	●
use f-keys for commands	●	●
download telesoftware		●
save frame to disc		●
tag/retrieve frame		
prepare message off-line	●	
exchange programs/files	●	●

ESSEX ENGINEERING SOFTWARE

Circuit Design Software Specialists

L A N A

A literal analysis program, incorporating sensitivity calculation, computing gain and impedance functions in terms of symbolic component names

For details of LANA and other software contact:

ESSEX ENGINEERING SOFTWARE
2 Albany Close, West Bergholt,
COLCHESTER, Essex, CO6 3LE.

NUMERIC KEYPAD

FOR THE BBC MODEL B

- Hooks into keyboard
 - Not software driven
 - Compatible with all commercial software
 - Leaves all ports free
 - Full travel key switches
- cheques/PO to:-

COMMERCIAL PRODUCTS **ONLY £44.95**
11 Hylands Close, Furnace Green, Inc. P&P
Crawley, Sussex RH10 6RX (0293) 30174. & VAT



■ Includes
RETURN
key

CBM64

£29.95



GRIFFEN COMPUTERS

TEL 0279 812295

8 RAINSFORD ROAD, STANSTED, ESSEX CM24 8DU

ROM SOFTWARE

EXMON II	£26.25	WORDWISE-PLUS	£48.15
TOOLKIT	£24.65	WORDWISE	£36.00
MUROM	£26.25	PRINTMASTER	£27.50
SPELLCHECK II	£28.60	CARETAKER	£27.50
SPELLCHECK (Disc)	£16.20	GRAPHICS	£27.50
SLEUTH	£26.25	DISC DOCTOR	£27.50

ADE	£54.00	ADDCOMM	£26.75
SPY II	£27.50	ULTRACALC II	£71.50
PROXIMA BEEB-TEXT	£14.00	BROM	£31.50
(The ultimate text development package)		LOGO	£62.00
		ISO-PASCAL	£62.00
		VIEW	£48.00

DISC INTERFACES


ACORN DNFS	£99.95	OPUS DDOS	£99.95
UDM DDFS (Version 2)	£89.95	27128 16k EPROM ONLY	£12.00

All prices include VAT @ 15%
Postage and packing charged at cost.

WARNING

If you do not like answerphones then please phone after
6pm or at weekends

Our family now run faster on the Tube®



The industry standard MACRO ASSEMBLER - DEBUGGER - EDITOR.

Used entirely by Island Logic and System to write 90K of m/c for The Music System! Version 2 has been significantly enhanced to include local labels, any number of output files, enhanced arithmetic expressions. With a SECOND PROCESSOR there is an 80 column version of the powerful ADE macro EDITOR and the option to assemble to memory for a really fast assembly.

£60 inc vat Please specify 40T or 80T utility disc

The ASSEMBLER that professional software writers use.

All the superb features of the ADE macro assembler version 2.

£35 inc vat Please specify 40T or 80T utility disc



The most comprehensive and cost effective of all DEBUGGING / DISC UTILITY ROMs.

The SECOND PROCESSOR compatible version can now SPY into either side of the Tube® or into any ROM. Rated by many reviewers as the best disc utility EPROM on the market.

£30 inc vat

SYSTEM




(0742) 682321

Please ring for upgrade prices

Dept. G 12 Collegiate Crescent Sheffield S10 2BA

Tube® is a registered trade mark of Acorn Computers Ltd.

Exclusive Scandinavian distributors
Dataforum
Oslo 5 02-371440



ROMs

There are basically two types of firmware produced for the BBC micro: language and utility ROMs. The former include not only computer languages proper, but also things such as word processors. Given the chance, they will take over the operating system at switch-on or hard break, ie the computer will boot up in the first 'language'



it meets, working from highest priority socket number 15 downwards. Utility ROMs, on the other hand, such as the various toolkit or programmers' aid chips reviewed in *AU* in October 1984, are designed to be called from within a language. Of the four ROMs examined, Acorn's behaves as a language, whereas the others are utilities.

Commstar

Pace's *Commstar* is an exceedingly versatile piece of firmware. It's capabilities are far in excess of any one modem, which means that, given access to a suitable modem, it should be possible to communicate with almost any other system. This versatility is achieved by giving the user a set of facilities to configure in the software all the parameters of communication.

Commstar is menu driven, having a main menu plus a sub-menu entered from the Initialise command. The main menu is split into three areas. First there are seven commands (copy, reset, output, wipe, load, save and



view) which act upon the buffer. Below these the selection is of six parameters which include communications details like echo (of character to screen) and auto linefeed, plus a choice of screen mode and printer on/off. Several commands are repeated on the function keys so that, for example, the buffer and printer may be turned on and off from within a session.

The third area is of more fundamental selections. Here we find communications/Prestel, disc/buffer and the choice of chat mode or file transfer.

Also in this area is the initialise com-

mand which allows the user to set the number of data bits and stop bits, together with the word parity and the speeds of flow in both the receive and send channels. Separately, receive and send may be set to speeds from 75 to 9600 bits/second. The default speeds are 300/300 in terminal mode and 1200/75 for Prestel.

In Prestel mode, this chip has many of the features now standard in viewdata routines. You are allowed to tag and retrieve (ie, to mark and later jump back to) frames of interest, to copy frames to disc, to single-step forwards or look at previous frames and to download and save telesoftware. In terminal mode it supports the XMODEM file transfer protocol referred to earlier.

Commstar does not issue any discrete modem configuration commands. For this reason it should be compatible with most modems which do not expect or require such commands.

Modrom

This chip is supplied with the Loco Systems SCM-100 modem as a package. It contains, like two of the others, configuration commands specific to its own modem, yet it is tolerant of and capable of working alongside other communications software.

Unlike the other chips, which are summoned by one particular call word, this one has 14 different entry points. There is no *MODROM command, but *HELP MODROM gives a list of 14 additional OS commands controlling the features of both the hardware and the software, and include *TALK and *PRESTEL, *Modrom's* own terminal and viewdata routines.

In Talk, various options are available: screen mode 40 or 80 characters (mode 7 or mode 3); transmission speeds 300 or 1200 bits/second; and, to configure the SCM-100 modem, choice of originate or answer modes and UK or US frequencies. In the Prestel rou-

tine, of course, all these parameters are fixed. In both routines a screen display of the assignments of the function keys is available.

Auto-dial by the modem is selected by the *DIAL command, followed by the telephone number. If the suffix 'R' is added, it will keep dialling after an unsuccessful call until a modem tone is picked up. *DIAL may be used even with other software driving the modem.

There is a command to test the modem, *TEST, which sends 80 characters alternating *U*U*U..., causing much bit changing due to the ASCII codes for these characters. Other software commands put the modem on or off-line and show the current configuration, and *TIME shows the length of time on-line. The command *AA puts the modem into auto-answer mode, and needs to be used in conjunction with bulletin board software or other auto-answer routine supplied by the user.

The user manual covers all functions, but could be improved. All round I was very impressed by the Loco Systems package. I thought initially that a modem without switches was not particularly good news, but the ease of use of the software wiped away any such doubts.

Acorn's Prestel ROM

Acorn's sophisticated Prestel ROM is supplied as part of the Prestel Adapter package, a dedicated V23 viewdata facility which provides access to all Prestel's features and adds a few more.

The auto-dial capability of the modem is brought into play by the CALL command (on f3), which produces an invitation to enter the local Prestel telephone number. Prompt and status messages add a user-friendly touch. In fact, the Enter/Dialling/Waiting/On-line screen sequence plus the sounds from the modem's small speaker combine to provide full audible and visual monitoring of the dialling process. If you enter a phone number without switching on or even plugging in the hardware, the screen prompt 'Adaptor?' points you in the direction of your folly. (Note the spelling Adaptor in the software and Adapter on the hardware.)

The software makes extensive use of all 15 soft keys (f0-f9, cursor control and Copy), not only in 'immediate' mode but also with Shift, Control and Control-Shift. To help you keep track there is a keyboard strip and an on-screen Help menu which can be summoned up at any time in a session by f0, and the first-class user guide details all software commands together with those Prestel commands that have soft key equivalents.

	Hardware				
	Acorn's Prestel Adapter	Nightingale	SCM-100	Watford/Telemode 2	OEL Pac-M1
Acorn	●				
Commstar		●	●	●	●
Modrom		●	●	●	
Watford				●	
OEL				●	
Protek					●

Table 4. Hardware/software compatibility

CARE ELECTRONICS

UNIT 14, PEERGLOW INDUSTRIAL ESTATE, OLD'S APPROACH, TOLPITS LANE, WATFORD, HERTS.

TELEPHONE: 0923 777155

DON'T BUY EXTRA DISK DRIVES WHY NOT BUY OUR DISK DRIVE SHARERS?

DUAL @ £69.00d

★ two micros to one disk drive.

QUAD @ £113.85d

★ 4 micros to one disk drive.

Both units **Colour Finished** honey beige

COMPUTER PRINTER SELECTOR

★ 26 pin as BBC

★ 1 micro to 6 printers

★ 6 micros to 1 printer

★ colour finished honey beige @ £75.90 incl. VAT.

DUAL POWER SUPPLY UNIT FOR DISC DRIVES:

★ Colour finished to match BBC.

★ Comes complete with moulded mains lead.

★ 6 pin BBC outlet or Dual power leads for disc drives. (Please specify when ordering)

POWER RATING:

*Standard Version

Suitable for use with TEAC & TEC Drives.

*High Rated Version

Suitable for use with Mitsubishi, Tandy, Canon etc (Please ring factory for other makes)

Price Each.

Standard = 35.65b Inc VAT

High Rated = 37.95b Inc VAT

MAKE YOUR TEAC & TEC DRIVES SWITCHABLE:

(40/80 Conversion assembly)

200K & 400K Drives only

TEAC Version @ 5.75c Inc VAT

TEC Version @ 7.36c Inc VAT

READYMADE LEADS:

RIBBON:

Disc drive single

@ 6.67c Inc VAT

Disc drive dual

@ 10.12c Inc VAT

Printer

@ 7.82c Inc VAT

Parallel 26 pin

@ 8.74c Inc VAT

OTHERS:

RGB 6 pin DIN

@ 2.99c Inc VAT

RGB 6 pin to 7 pin DIN

@ 4.14c Inc VAT

RGB 6 pin to SKART

@ 7.82c Inc VAT

BBC to single disc

@ 3.45c Inc VAT

BBC to Dual disc

@ 4.60c Inc VAT

Serial 25 pin "D"

@ 12.88c Inc VAT

We can make up any combination of cable assy. Please contact Factory for details.

FLOPPY DISCS: Boxed in 10's

3M's Single sided Double Density @ 16.10c

3M's Double sided Double Density @ 25.99c

Fuji Double sided Double Density @ 25.99c

THE CARE LOW PROFILE ROM MODULE SYSTEM

For use with the BBC Micro

Don't run the risk of damaging your ROMS/EPROM or your BBC micro. Whenever you want to remove ROMS/EPROMS from your BBC. Fit our Low Profile Rom Module System and save your collection of ROMS/EPROMS in our specially designed cartridges:

The CARE LOW PROFILE MODULE SYSTEM

Has been designed not to take any power from your BBC Micro and allows you unlimited ROMS/EPROMS.

The CARE LOW PROFILE ROM MODULE SYSTEM gives you the flexibility to plug in any ROM/EPROM for example View - Toolkit - Wordwise etc., without having to reopen your BBC micro every time you want to change your ROM/EPROM.

The CARE LOW PROFILE ROM MODULE SYSTEM is a ribbon extension connector system fitting into the predestined slot on the left of the BBC keyboard, passing underneath the keyboard and inserted into one of the existing sideways ROM sockets. Once the module system is fitted, you need one CARE ROM CARTRIDGE for every ROM/EPROM.

The CARE LOW PROFILE ROM MODULE SYSTEM has been designed to fit all BBC Micros model B, and will also fit BBC Micros model A which have been upgraded to enable access through predestined slot to sideways ROM sockets.

Each **CARE LOW PROFILE ROM MODULE SYSTEM** comes neatly packaged in a special presentation case.

THE CARE LOW PROFILE ROM MODULE SYSTEM IS TOTALLY COMPATIBLE WITH THE VIGLEN SYSTEM.

EACH SYSTEM CONTAINS:

- 1 Low profile socket housing
- 1 Cable assembly.
- 1 Rom cartridge.
- 5 Blank Labels.
- 1 Installation instructions.



THE CARE LOW PROFILE ROM MODULE SYSTEM

COMPLETE KIT @ £16.10d Inc VAT

Spare Cartridge @ £ 4.14c Inc VAT

5 Cartridges @ £19.55c Inc VAT

10 Cartridges @ £33.58c Inc VAT

6-Way Library Rack @ £1.84c Inc VAT

★★★ REDUCED to CLEAR ★★★

VIGLEN ROM CARTRIDGE SYSTEM

Complete system @ £13.11 Inc VAT

Spare Cartridge @ £ 2.53 Inc VAT

5 Cartridges @ £12.65 Inc VAT

Viglen system totally compatible with the CARE system.

DON'T BUY A COLOUR MONITOR!! HAVE YOUR 14" & 16" PHILIPS, PYE or FERGUSON TX COLOUR TV CONVERTED TO A TV/MONITOR

Normal T.V. @ £50.60a Inc VAT

Remote Control @ £56.35a Inc VAT


Teletext @ £62.10a Inc VAT

- ★ Resolution better than 585 x 450 pixels.
- ★ Image clarity comparable to leading monitors.
- ★ Includes RGB lead for connecting with BBC.
- ★ Conversions carried out at our workshops within 2/3 days.
- ★ Please write or telephone for other makes.

RGB CONVERSION KIT

(Please Telephone for details)

@ 40.25c Inc VAT.



CARE

ELECTRONICS

TEL: 0923 777155

HOW TO ORDER:

By Post. Enclose your Cheque/P.O. made payable to:

CARE Electronics.

Or use your ACCESS. Allow 7 days for delivery. Please add carriage.

OPEN

9am-5pm MON-FRI

9am-4pm SAT

a) @ 8.00

b) @ 5.00

c) @ 1.00

d) @ 2.00



Any Prestel frame of interest may be stored on tape or disc using Save Frame on f8. The software automatically creates a filename derived from the frame number, but the user has the option of overriding this and giving a different name before pressing Return to confirm the instruction—a user-friendly touch typical of this software. The associated load frame command retrieves the screen display from your filing system (disc or cassette), and can be used either to access stored information off-line or, in conjunction with Edit, to put a frame into the system for sending to someone's mailbox.

The Save/Edit/Load capability



THE USER-FRIENDLY TOUCH

makes this chip stand out from other Prestel offerings. The Edit command provides the facility to build a viewdata frame while off-line, using a blank message or greeting frame previously saved. Your composition completed, you go on-line and load frame, ready to send using the Prestel mailbox facility. The savings in call charges made possible by off-line working are obvious, and make this an attractive alternative to the telex service for business use.

Other commands allow you to download and subsequently save telesoftware programs and to print frames, and although there should be no problem with text, accurate reproduction of Prestel graphics is not normally possible. A substitute character such as an asterisk is produced by most printers.

Finally there is a whole series of configuration commands available to the user, enabling variation of such things as response delay and inter-digit dialing delay, but these are better left untouched unless you have problems.

Watford

This is unusual, being a user-to-user-only ROM. The company also issues this software on disc and cassette, but both of these require their Prestel ROM (£20 + VAT) to be fitted to the computer, whereas this version stands alone.

Completely function-key driven, the chip gives options of chat mode receive/transmit; file receive/transmit; buffer commands save, load and flush; exit to OS command and an interesting copy on/off function. Copy here means literally to copy the screen display from one BBC micro to another, giving the receiver a window on what you are doing. This function, toggled by f9, in effect issues a *FX 3,5 command (BBC

micro User Guide, page 422).

The manual I received with my review copy was only provisional but includes instructions on transferring a file or program using chat mode for the parties to make arrangements to send/receive—both ends must be using the same software. I also noted with interest that f4 puts the modem and software into an idle state, allowing the phone to be used normally in the middle of a session.

CASSETTES

A direct comparison between ROM and cassette-based software is not fair as the speed and reliability even of discs—let alone tapes—cannot compete with the absolute convenience of firmware.

Protek

Protek's cassette-based BBC Modem Pack software runs in two modes—to access viewdata or for user-to-user communications via their portable acoustic modem.

Running the software produces a main menu of six items, which you can return to during a session using f0. The first option, Log On/Off, leads into the secondary menu of Log On, Change ID, Log Off options—all quite straightforward. Once on line to Prestel, you can work your way around in the normal manner or use the View, Print or Save Frame main menu choices, outlined in the documentation—which is very sparse. It can be argued, with some logic, that heavy documentation is inconsistent with a cordless, portable modem, but I do not feel that three small pieces of paper is good enough.

Back to the software—downloading and saving of telesoftware programs is catered for, although any program thus acquired overwrites the Prestel routine in Basic. To continue it is necessary to reload, after first saving your telesoftware, of course.



Option six on the main menu leads into user-to-user mode, switching the modems between originate and answer to give 1200/1200 half duplex communication. This mode gives a file transfer capability, for either a Basic program or a block of machine code, rather than an interactive 'chat' type dialogue. To transfer code, the software asks for start address and block size and gives the option of entering a

relocation address for the receiver. Both computers do not have to be Beebs, but both must have Protek 1200 modems.

OEL

I tried OEL's user-to-user software for the Telemod 2 modem. Instructions for loading the tape program, appropriately named 'U2U', give a sequence using the Shift and Break keys, rather than the usual load command. A machine code routine, it lives in memory from &61AB to &7BFF.

This software switches the modem alternately between originate and answer to give a half duplex link for a



program or a block of machine code. Files are transferred in blocks with error checks, and up to three attempts are made, after which it is suggested that you redial.

Messages can be compiled off-line to keep telephone bills down. Compositions are then sent using CTRL-S. Other control key combinations include -B and -C, which turn the remote printer on and off and so allow a written message to be sent, and -E which sends the words 'END OF MESSAGE' and the code to switch the modems around. Both ends are advised of the status by alternate red and green squares on screen for transmit and receive.

SUMMING UP

So there we are. Four commroms, all very different, and two cassettes.

The message, if I dare say it again, is that they exhibit different strengths in various directions, and should be considered carefully in relation to your requirements. Don't be blinkered by your current needs—keep an eye on the future.

My view is that if you require only viewdata access and want to get the maximum usage out of Prestel, the Acorn ROM is the answer. If, however, your needs include Prestel access but also stretch to user-to-user communication, bulletin board use or even Telecom Gold, then you need multi-standard software, and for sheer flexibility, combined with the fact that you are not tied to any one modem, you can do no better than *Commstar*.

Of the cassettes, I prefer Protek's tape, which gives both Prestel and user-to-user access.

CLARES No1 IN UTILITY SOFTWARE!

ENHANCED

BETA-BASE £25 DISC
8 GREAT FEATURES

WHAT IS A DATABASE?

It is a FILE which contains RECORDS. Records consist of a number of FIELDS containing the information—an analogy can be drawn with a card index in which a box of cards is the file. Each card is a record and each line on the card is a field.

SPECIFICATION

- 1) Random Access—disc based, single or dual drives
- 2) File Size—99K (40 track), 199K (80 track)—65,000 + records
- 3) Record Size—up to 2048 characters and 200 fields
- 4) Field Size—up to 254 characters with complete line scanning
- 5) Access any record using Primary Key in 2 seconds
- 6) Holds—1200 NAMES AND ADDRESS records on 100K disk
- 7) Search—500 records on 5 fields in 60 seconds
- 8) Sort—500 records on 3 fields in 60 seconds

SYSTEM FEATURES

- **CALCULATE**—using any valid expression and store results
- **POWERFUL PRINTOUT OPTION**—Eliminates need for separate mailing program, Parallel/Serial Printout allows setting of printer control codes, line spacing, tabulation, Headings etc, plus label printing with horizontal and vertical tab control.
- **REDEFINE**—Titles, field widths, number of fields, number of records etc.
- **TRANSFER**—Records from one file to another.
- **SEARCH LISTS**—Allow creation of sub-Databases within main Database.

NEW *

- * **GLOBALENTY** enables repetitive data to be typed in once and placed in as many records as required. Can also be used with a search list to provide a powerful global edit/update facility that will save hours of typing.
- * **SPOOLER** enables you to create spooled files that are compatible with Wordwise, View and other word processors. You can therefore present your data within a document or in varying formats etc. The spooler program will allow to format your spooled file in the same way as the print out option. You can therefore have headings, columns, titles, numbers etc.
- * **INPUT** is a routine included on the disc which will allow you to write utilities for accessing your data and tailored specifically to your needs.
- * **TUBE** compatible with the 6502 second processor.
- * Comprehensive manual and tutorial. All timings and sizes are relative to ACORN DFS. Compatible with ACORN DFS, WATFORD 1.3 and latest AMCOM DFS SERIES B.
- * **ORIGINAL USERS** send your disc plus £3 for up grade.

REPLICA II: £12.00.

DISC

The original REPLICA set a very high standard so the specification we set our chief programmer included some impossible features. In fact ACORN state that some of the things that we have done are impossible, it just took us longer that's all. REPLICA II transfers most cassette based programs to disk, even more than REPLICA. When you buy disk drives you do not have to throw away expensive cassette based programs.

REPLICA II transfers 'LOCKED' programs, programs loading as files, programs that load below &EOO, those with up to 6 sections and those up to &6E in length eg adventure programs. No waiting for 6 minutes whilst adventure programs load.

REPLICA II is very easy to use. The user enters a name, how many sections and whether CHAIN, RUN or *LOAD to load the first section. Press play and let the program do the rest, even a menu. Think how much it will cost you to buy just 1 disk version of your favourite program—REPLICA II which will hold up to 16 programs, limited only by the disk capacity.

FX 80 PRINTER DRIVER £12.00

PRINTER DRIVER FOR EPSON FX80 AND VIEW

Multi-page driver with print menu allowing the setting of global (document wide) printer functions at printer initialisation. The print menu program contains a sophisticated character generator which allows the construction of 95 user defined characters which are then accessible from VIEW via a highlight option. Supplied on disc with comprehensive user manual.

NEW

DISCDEX: £15.00 DISC

- Catalogues all your discs quickly and easily.
- Room to store four thousand titles.
- Quick search and load option.
- Compatible with single or dual drives.
- Extensive print options for catalogue and disc labels.
- Update and delete options.
- Supplied with stick on labels to number your discs and a supply of labels for printing your own disc labels.

DISCDEX is the answer to a disc users nightmare. How many times have you had to wade through your discs looking for the file that you know is there somewhere? Now with DISCDEX those days are gone.

DISCDEX will catalogue all your discs and store them in alphabetic order. In addition to the very useful search and load facility DISCDEX will also print out a full catalogue in alphabetic or disc order. Even more useful is the ability to print disc labels for sticking on the disc or the jacket.

DISCDEX is only suitable for discs with 31 file names as in the standard ACORN system. It is not suitable for double density interfaces.

NEW

ONESHOT: £12.00 DISC

- Full feature trace utility.
- Single step through BASIC program or halt at user determined interval.
- Print line number prior to execution.
- Obey fixed instructions before executing a line.
- Trace window allows screen to be seen whilst tracing execution.
- "Printer only" will force trace output to a printer allowing full screen display.
- Ability to dynamically alter control of ONESHOT.
- ONESHOT can be configured to run in any area of memory.

ONESHOT is a 1.25kb machine code program which gives the user several powerful aids in debugging BASIC programs. These include the ability to SINGLE STEP through the BASIC code of the target program, stopping the processing at specified points and comprehensive trace functions of the variables used by the target program.

A very powerful option allows the user to enter a command string into function key 0 and instruct ONESHOT to obey this command BEFORE each line is executed e.g. *KEY0 PRINT X%; M will print the value of X% before executing each line. This is a very simple example and it is possible to do much more complex things including printing the value of a variable only when it changes or when it reaches a certain value or falls within a certain range. This option can also be used to dynamically alter ONESHOT as it is working. The power of this option is only limited by the users ingenuity. In addition to ONESHOT the disc also contains 3 very useful function key routines. The first will search for any DEFPROC or DEFFN and print the line numbers in which they appear together with the name of the procedure or function. The second will search for a specific procedure or function and print the line numbers containing it. The third routine will print out every active variable together with its present value. ONESHOT is not compatible with double density interfaces.

NEW

FUN HOUSE: £10.00 DISC

FUN HOUSE is a highly original suite of educational programs suitable for ages 3 to 13. The program is designed to encourage children to spell words which relate to objects found around the home. Animation and music are used to good effect and some highly original ideas are incorporated. Each room exercise is terminated with a warning item e.g. the lounge finishes with 'FIRE' which goes on to engulf the whole lounge. Tests with a newly hired 4 year old resulted in us having to prise him away from the keyboard after 2 hours. In that time he had gone from never having used a keyboard to finding the location of all the keys very quickly and entering the correct answer. He had thus started on the path to learning spelling and familiarised himself with the keyboard including the use of DELETE to correct his mistakes. Can you afford not to give your children the same start?

FUN HOUSE is not compatible with double density interfaces.

clares
MICRO SUPPLIES

Send for detailed newsletter.
All prices inclusive of VAT & Carriage—
NO EXTRAS! Please state 40 or 80 track disc
and state which D.F.S. you use

Dept AU4
98 Middlewich Rd.,
Northwich, Cheshire CW9 7DA.
Tel: 0606 48511
Open 9—5pm Monday—Friday

**All Disc Software now
available on 3" disc—
add £3 to printed prices**



BROM— ANOTHER FIRST FROM CLARES!

The first Toolkit ROM to give you full screen editing with insert and overwrite. Works just like WORDWISE but on a Basic Program instead of text.

You can enter *Err On which will trap errors within the program and drop you into the screen editor at the statement which caused your problems.

22 Extra Functions Available including
*ROM OFF allows you to disable sideways ROMs and have them stay off even on CTRL/BREAK even the DFS.
A real must for users of Second Processors
*FIND and *CHANGE strings
or BASIC keywords—selectively or globally
*COMPARE provides a true verify of programs saved to tape or disc

YOU CANNOT SURVIVE WITHOUT BROM

BROM AVAILABLE NOW FOR JUST £34.50 inc.




clares
UTILITY SOFTWARE

SPECIAL OFFER FROM VIGLEN

* Scoop Viglen price **£99.00 inc. VAT**
£86.10 ex. VAT

* Normally sold at **£143.75**

* Special purchase

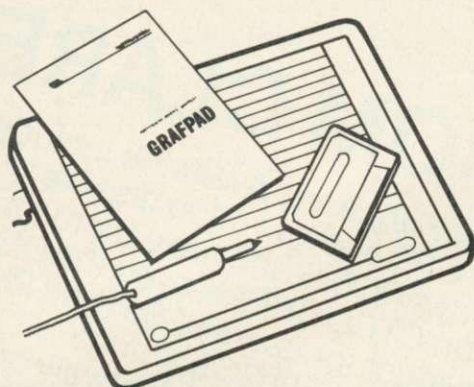


This remarkable Grafpad from British Micro allows you to input information into your computer – very accurate and high resolution, not to be confused with other models which are both more expensive and less accurate. Supplied with all necessary cables, manual and sample programs, to allow you to develop your own application programmes.

Computer aided design programme. Drawing programme etc.


SEE OTHER VIGLEN ADVERTS ON HOW TO ORDER

NEW!
 from
Viglen
 COMPUTER SUPPLIES

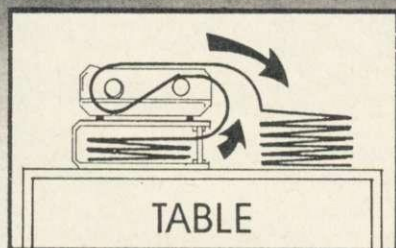

Printer Stand
£14.95 INC. VAT
 Carriage & Packing £3.00

A PRINTER STAND

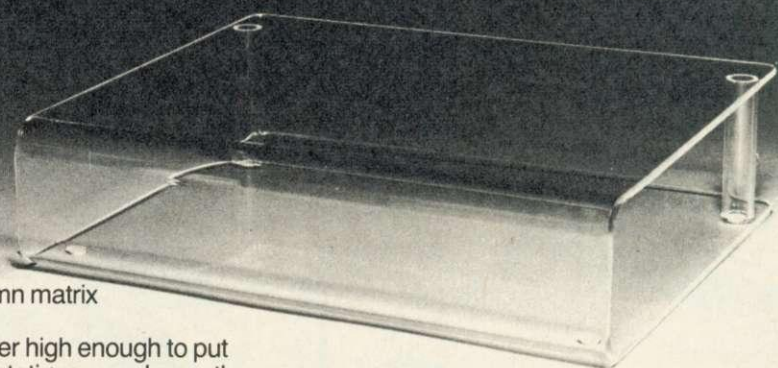

- For 80 column matrix printers
 - Raises printer high enough to put continuous stationery underneath
 - Beautifully finished in clear perspex • Viglen quality every time
 - Will accept paper up to 12½" wide • Non slip rubber pads
- Dimensions: 15" (380mm) wide (320mm) deep 4" (90mm) high
 Also available 136 column stand @ £27 inc. VAT.

COME TO VIGLEN FOR A FAST, FRIENDLY, PERSONAL SERVICE

DEALER ENQUIRIES WELCOME

Post to: VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL, LONDON W7 2QA.

Prices subject to change without notice

AU 4/2

Please send me _____ (qty) PRINTER STANDS at £17.95 each. I enclose Cheque/P.O. for £ _____ made out to

VIGLEN COMPUTER SUPPLIES or debit my ACCESS/BARCLAYCARD No. _____

Name _____ Signature _____

Address _____


The only ROM



Cartridge System that does not overload your pocket or your BBC Micro

Why risk damage to your BBC micro every time you want to change ROM's? Instead, store your growing collection of ROM's in professionally-made protective cartridges!

- All cartridges are gold-plated for durability and reliability.
- No need to switch machine off between cartridge changes.
- Insert and remove 'Wordwise' 'View' 'Disc Doctor', etc., at will, from your micro in absolute safety.
- Low, low power consumption unlike other systems.
- Save on memory.
- Price for complete kit, including cartridge only £15.95.
- Cartridges at £2.95 each.
- Four for £11.00 (ie £2.75 each).
- Ten for £26.50 (ie £2.65 each).
- Kit comes with 1 ROM cartridge, 1 Cable Assembly, 1 Blanking Off Plate (used if system is removed).
- 1 Socket Cover (used when no cartridges are resident to protect against dust).
- 1 Cartridge Rack (stores cartridges safely when not in use, also expands to a Library System).
- All prices inc. VAT.

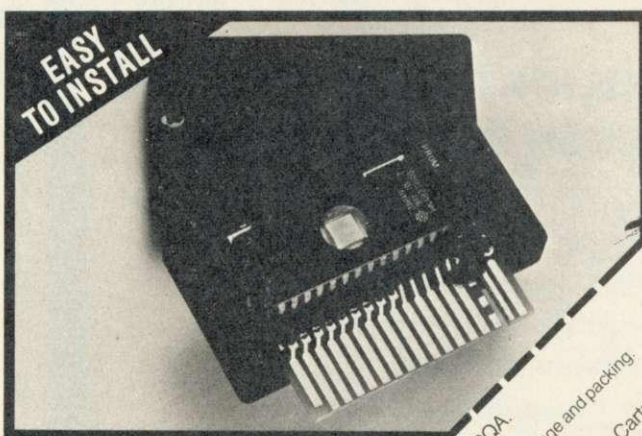

Viglen

COMPUTER SUPPLIES
UNIT 7 Trumplers Way,
Hanwell W7 2QA.
Tel 01-843 9903.

Post to VIGLEN COMPUTER SUPPLIES UNIT 7, TRUMPERS WAY, HANWELL W7 2QA.
Telephone: 01-843 9903. Personal Callers Welcome
I enclose Cheque/P.O. for £
Please send me (state number required)
I prefer to pay ACCESS/BARCLAYCARD (Delete whichever is not applicable)

Card No. _____
Signature _____
Name _____
Address _____

Please add £2.50 for postage and packing.
(50p only for single cartridge)

☐ Kits
☐ Cartridges
Credit Card valid if approved for
Cardholder. Address and details must
be the same as card holders

Cheques payable to
Viglen Computer Supplies

AU 4/1

PHILIPS COMPUTER MONITORS

From
Viglen
COMPUTER SUPPLIES



**ONLY
£85
INC. VAT**

PHILIPS BM 7502 GREEN SCREEN MONO

From the highly successful 'Philips 80 Range', here is a monitor specially designed to display graphics and alphanumeric data with perfect clarity.

- 12" high resolution, 20MHz band width, anti-glare screen
- Composite Video (CVBS) and Audio Input
- 2000 character (80 x 25) display
- Swivel base available £13.95 incl. VAT
- Suitable for the following computers:
BBC B (free leads supplied for the Beeb); Apple II, IIE, II plus
Apple III; Atari 600XL, 800, 800XL, 1450XL; Coleco Adam;
Commodore Vic20, Vic64; IBM-PC with interface; Texas
Instruments T199/4A; Timex Sinclair; Einstein; QL

DON'T BUY

just a colour monitor
when you can have
this New Philips TV
+ Monitor for only

£225


INC. VAT



PHILIPS CT 2007 COLOUR TELEVISION + MONITOR

This very popular unit is not only an excellent Colour Television Receiver, but also a sophisticated computer monitor. Featuring:

- Free lead supplied for BBC Micro
- Headphone socket and speaker mute switch
- RGB, (TTL and can be modified for linear), Composite Video Input (CVBS), Audio Input plus this model has an AV/TV switch
- 14" picture tube with 0.65mm resolution
- Maximum 80 characters per line 20MHz band width
- 12 pre-select buttons
- Aerial supplied
- Swivel base extra £13.95 inc. VAT



AV/TV
SWITCH

CVBS

RGB

Open 9.30 - 6 weekdays,
9.30 - 4 Saturdays



**Full Twelve
Months Guarantee**

HOW TO ORDER

BY POST: To purchase either of the items in this advertisement simply fill in the coupon with your requirements. Enclose your Cheque/P.O. or use your Access/Barclaycard. Please make cheques payable to VIGLEN COMPUTER SUPPLIES and post to the address on the coupon. Add £8.00 for Postage, Packing and Insurance for each item. Prices subject to change without notice.

BY TELEPHONE: Ring (01) 843 9903. Credit Card holders Access/Barclaycard can purchase by telephone. Please give Card No., Name, Address and the items required.

Post to: VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY,
HANWELL W7 2QA Telephone 01-843 9903. Personal callers always welcome.

Please send me
I enclose Cheque/P.O. for £..... incl. £8 carriage. Payable to Viglen Computer Supplies.
I prefer to pay by ACCESS/BARCLAYCARD (Delete whichever is unapplicable).
Card No:
Signature:
Name:
Address:

AU 4/3



The BBC Model B

All the peripherals from Viglen

The best service-The best value

Disk Storage No.1

This diskette storage holds 70 diskettes
Our **Super Low price**
£14.95 including VAT





Disk Storage No.2

This lockable diskette box holds 90 diskettes
Super Low price
£14.85 inc. VAT

3M Scotch Disc

5 1/4" diskettes single sided

	1-2 boxes	3-9 boxes	10+ boxes
SS 40 TRACK	£15.00	£13.50	£13.00
DS 40 TRACK	£20.00	£18.40	£17.70
SS 80 TRACK	£23.00	£20.70	£20.00
DS 80 TRACK	£26.70	£24.00	£23.00

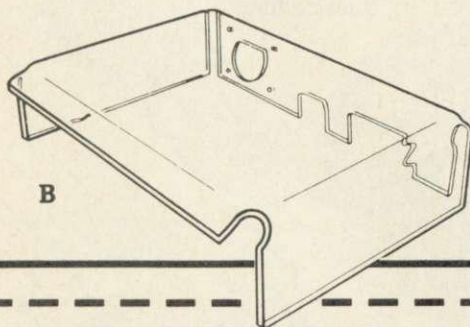


Monitor Stand

Our **Super Low price**
£14.95
inc. VAT

Complete Package For Word Processing

From **£960** inc VAT
Microvitec Monitors
Standard £185
Medium £259
Med & Pal £295
High £389

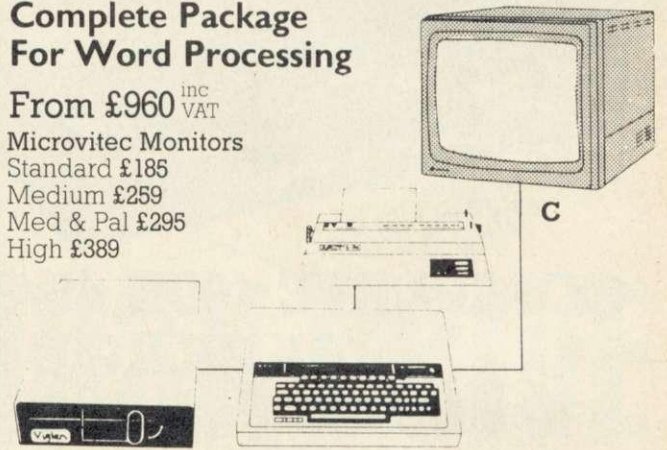

Dot Matrix Printers

Taxan Kaga KP810 £301
Canon PW1080A £321
Epson RX80/FT £275
Epson FX80 £389
Shinwa CPA80 (100cps) £219
Mannesmann Tally MT80 £209

Daisy Wheel Printers

Juki 6100 £385
Quen Data £255

Please add £8 for 1 1/2 metre length printer lead for the BBC micro.

All prices inc. VAT

Please add for carriage.

A - £2. B - £3. C - £8.

BBC Model B
£349

BBC Model B + DNFS
(latest 1.2 pts)
£425

Post to: VIGLEN COMPUTER SUPPLIES. UNIT 7, TRUMPERS WAY, HANWELL W7 2QA

Telephone: 01-843 9903.

Please send me _____

I enclose Cheque/P.O. for £ _____ Incl. carriage.
Cheques payable to Viglen Computer Supplies.

Name _____

Address _____

Credit cards valid only if signed by card holder. Address must be the same as card holder.



I prefer to pay by ACCESS/BARCLAYCARD
(Delete whichever is not applicable)


Card No. _____

Signature _____

AU 4/4

PURE EXCELLENCE


Best Design, Best Value, Best Service.

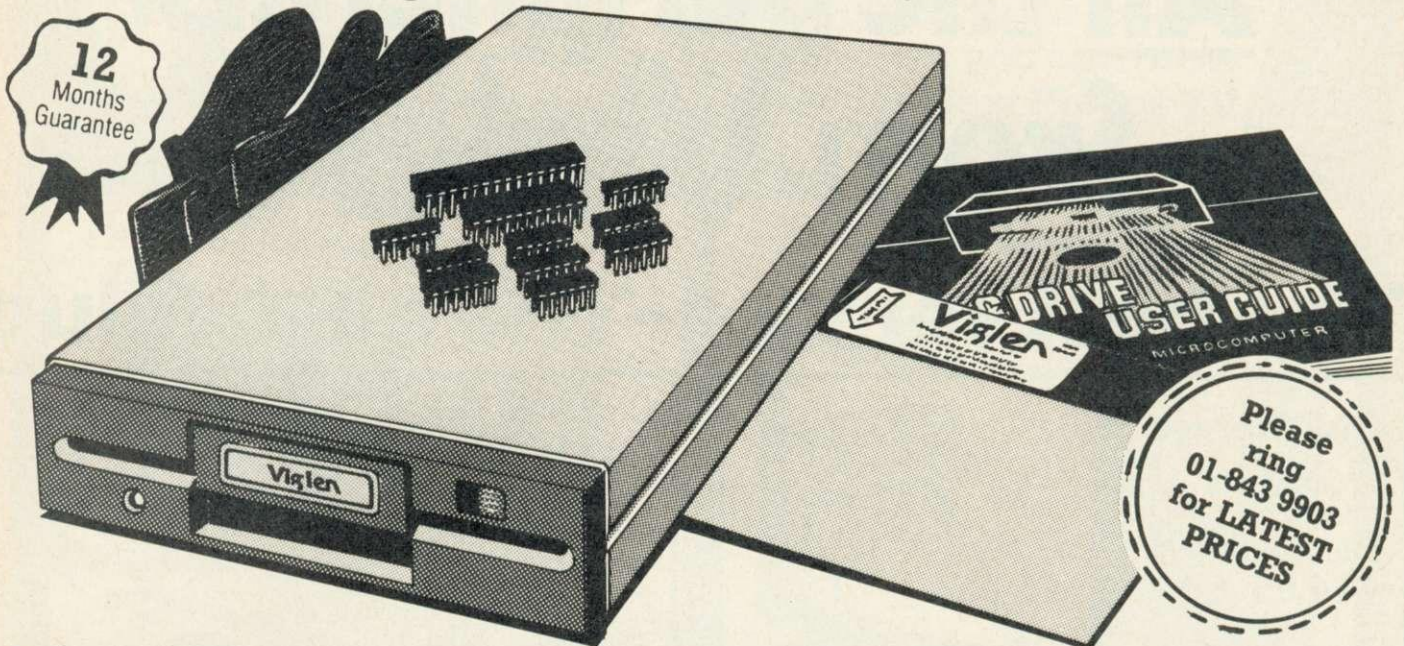

COMPLETE 400K 40/80 TRACK SWITCHABLE PACKAGE FROM VIGLEN

This offer includes the latest 1.2 version of Acorn Interface DNFS.

Complete Disk System for the BBC Model B



OPEN
9.30am-6.0pm. Mon-Fri
9.30am-4.00pm. Sat.

- Package assumes you own a BBC Model B with 1.2 operating system, with power outlet

OFFER INCLUDES THE FOLLOWING:-

- **Disk Interface** (call in at our showroom for free fitting while you wait) or supplied with easy-to-follow instructions.
- **400K 40/80 track double-sided disc drive** including case and all leads.
- **Comprehensive Manual** a fact-filled, 56 page document includes techniques of loading from cassette to disk. *Not available elsewhere.*
- **Utilities Disk** includes formatting, verifying, BASIC program comparator, disassembler, Epson screen dump, dual catalogue (giving 62 files), large printing and many others.

Viglen
COMPUTER SUPPLIES

Unit 7, Trumpers Way,
Hanwell W7 2QA.
Telephone: 01-843 9903

AMPLE ON-THE-SPOT
CAR PARKING - AND IT'S FREE!

**DISK DRIVE
& ACORN
INTERFACE**

£229
INC.
VAT

**Disc Drive
on its own
£129**
inc VAT

Prices correct at time of going to press - offer subject to availability
Post to: **VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL, W7 2QA.**
Please send me _____ (Qty) 400K + DNFS at £241 (includes £12 carriage, usually despatched next day)
I enclose Cheque/P.O. for £ _____ made out to VIGLEN COMPUTER SUPPLIES.
I prefer to pay by ACCESS/BARCLAYCARD (Delete whichever is not applicable) Card No. _____
Signature _____
Name _____
Address _____
AU4/5

Credit cards used are subject to the card issuer's terms and conditions.

SPECIAL OFFER From Viglen


12 Months Guarantee



AMPLE PARKING
AND IT'S FREE!
OPEN MON-FRI 9.30-6
SAT 9.30-4

PANASONIC DISK DRIVE

COMPLETE DISK SYSTEM FOR THE BBC MODEL B

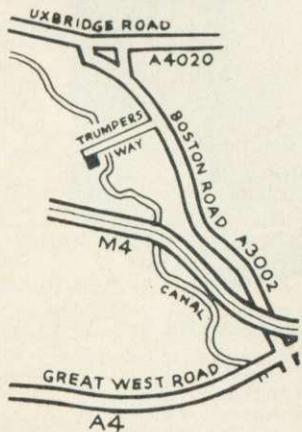

- Package assumes you own a BBC Model B with 1.2 operating system, with power outlet

OFFER INCLUDES:

- Acorn Disk Interface (call at factory for free fitting)
- 100K 40 track Panasonic Disc Drive including case and all leads
- User Guide 54 page fact filled
- Utilities Disk including formatting, verifying, BASIC program comparator, disassembler, Epson screen dump, dual catalogue (giving 62 files), large printing and others

Disc Drive and Interface
£175
inc VAT

Disc Drive on its own
£94
inc VAT

Viglen
COMPUTER SUPPLIES

Unit 7 Trumpers Way
Hanwell W7 2QA
Telephone: (01) 843 9903

Prices correct at time of going to press - offer subject to availability.

Post to: VIGLEN COMPUTER SUPPLIES UNIT 7, TRUMPERS WAY, HANWELL, W7 2QA

Please send me _____

I enclose Cheque/P.O. for £ _____

I prefer to pay ACCESS/BARCLAYCARD (Delete whichever not applicable) Card No. _____

Signature _____

Name _____


Address _____

made out to VIGLEN COMPUTER SUPPLIES (please add £12 for carriage) usually despatched next day

Credit cards only if signed by card holder. Address must be the same as card holder.

AU4/6

MAKE THE MOST OF YOUR COMPUTER.

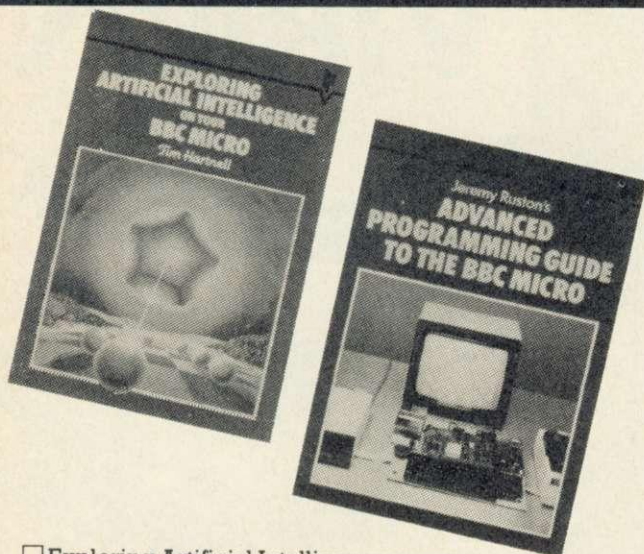

- | | |
|---|-------|
| <input type="checkbox"/> Exploring Artificial Intelligence on your BBC Micro
Tim Hartnell. | £6.95 |
| <input type="checkbox"/> Advanced Programming guide to the BBC Micro
Jeremy Ruston. | £7.95 |
| <input type="checkbox"/> Dynamic Games for your Electron
Neal Cavalier-Smith. | £4.95 |
| <input type="checkbox"/> 36 Challenging Games for the BBC Micro
Chris Callender and Tim Rogers. | £5.95 |
| <input type="checkbox"/> Let Your BBC Micro Teach You to Program
Tim Hartnell. | £6.45 |
| <input type="checkbox"/> Putting Your BBC Micro to Work (includes a full word-processing program, plus 14 others)
Chris Callender. | £4.95 |
| <input type="checkbox"/> Creating Adventure Programs on your Computer
Andrew Nelson. | £4.95 |
| <input type="checkbox"/> The Easy Way to Program Your New Computer
Tim Hartnell. | £3.95 |
| <input type="checkbox"/> Practical Applications for the Microcomputer in the Home
David Hole. | £4.95 |
| <input type="checkbox"/> The Art of Structured Programming
Peter Juliff. | £5.95 |

These books are available from most book and computer stores. In case of difficulty, order directly from us.

Interface Publications, Dept. QAU.
9-11 Kensington High Street, London W8 5NP.

Please send me the indicated books. I enclose £ _____

Name _____

Address _____



Interface Publications Ltd

Interface

(TRADE ONLY: Interface Publications are distributed exclusively in the UK and Eire by W H S Distributors. Export trade handled by Interface Publications.)

FOOD FOR THOUGHT COMP -U- CATER

plans meals from over 200 recipes — enter your own if you prefer

calculates quantities from 2 up to 48 portions and prints the results

works out the whole shopping list then prints it — and the menu

Thinks

if only it could wash up as well
it would be —

WORTH A FORTUNE!

Nevertheless it's a MAGIC GADGET — for BBC Model B disc users

40Track £24.95

80Track £26.95


add 50p postage & packing

SHUMWARI ASSOCIATES

(Dept B) 12 Marlin Court Marlow Bucks SL7 2AJ

Tel: 06284 5751

NEW HIGH RESOLUTION TV/MONITOR

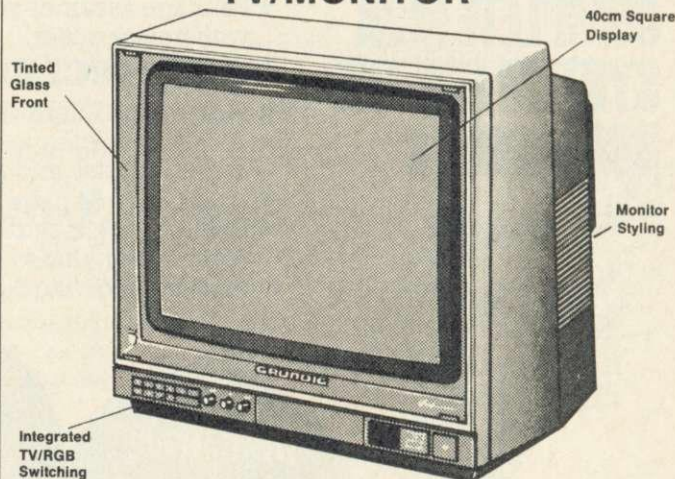

Is this what you have been waiting for ?

- | | |
|---|--|
| ★ 40cm Flat Square display Tube. | ★ Integrated switching & level control |
| ★ 0.4mm Stripe pitch for high resolution. | ★ RGB contrast control |
| ★ 3 way operation: — 1 High resolution TV; 2 Composite Video and Audio; 3 RGBS and Audio. | ★ Automatic colour balance for long term stability |
| | ★ 20" version available soon. |

A high quality advanced design **GRUNDIG TV**. Modified only by **NEWARK VIDEO CENTRE**. Available as a standard version or: luxury remote control with optional teletext.

★ Lots of other models from 14" to 26". Standard 40cm £305.95. Remote control £335.95; Remote control with Teletext £413.95. Leads £5.99 (prices include carr. & VAT)

Callers welcome.

Details from:

NEWARK VIDEO CENTRE

108 London Rd, Balderton, Newark, Notts

Tel 0636 71475. Mon-Sat 9am-5.30pm

ACCESS/VISA



IN BROMLEY

**BROMLEYS FIRST
SPECIALIST COMPUTER STORE**

We are official Acorn Dealers with high standards to maintain and take pride in friendly and efficient advice and service.

See our extensive range of printers, monitors, disc drives, software and books.

Data Store

6 Chatterton Road, Bromley, Kent. 460 8991

BBC/ELECTRON EDUCATIONAL SOFTWARE

Our educational software is used in thousands of schools and homes throughout Great Britain.

EDUCATIONAL 1

BBC/ELECTRON

Tape £8.00 Disc £10.00

Hours of fun and learning for children aged five to nine years. Animated graphics will encourage children to enjoy counting, maths, spelling and telling the time. The tape includes six programs: MATH 1, MATH 2, CUBECOUNT, SHAPES, SPELL and CLOCK.

... 'An excellent mixture of games' ... Personal Software - Autumn 1983.

EDUCATIONAL 2

BBC/ELECTRON

Tape £8.00 Disc £10.00

Although similar to Educational 1 this tape is more advanced and aimed at seven to twelve year olds. The tape includes MATH 1, MATH 2, AREA, MEMORY, CUBECOUNT and SPELL.

FUN WITH NUMBERS

BBC/ELECTRON

Tape £8.00 Disc £10.00

These programs will teach and test basic counting, addition and subtraction skills for four to seven year olds. The tape includes COUNTING, ADDING, SUBTRACTION and an arcade type game called ROCKET MATHS which will exercise addition and subtraction. With sound and visual effects.

... 'These are excellent programs which teachers on the project have no hesitation in recommending to other teachers.' ... Computers in the Classroom Project, Riley High School.

FUN WITH WORDS

BBC/ELECTRON

Tape £8.00 Disc £10.00

Start your fun with alphabet puzzle, continue your play with VOWELS, learn the difference between THERE and THEIR, have games with SUFFIXES and reward yourself with a game of HANGMAN.

... 'Very good indeed' ... A&B Computing - Jan/Feb 1984

JIGSAW AND

SLIDING PUZZLES

BBC/ELECTRON

Tape £7.95 Disc £9.95

There are two jigsaw and four sliding puzzles on a 3 x 3 and 4 x 4 grid. Each program starts off at an easy level to ensure initial success but gradually becomes harder. It helps children to develop spatial imagination and in solving problems. The tape includes: OBLONG, JIGSAW, HOUSE, NUMBERS, CLOWN and LETTERS.

KON-TIKI

BBC

Tape £10.95 Disc £12.95

Simulation program based on Thor Heyerdahl's KON-TIKI expedition. Enjoy a journey on the KON-TIKI recording on a map the raft's position and entering notes in the logbook on creatures found, unusual events etc. Inclusive of booklet, background information, maps and fully supportive illustrated data sheets.

... 'A well thought-out package with a wide appeal' ... Which Micro & Software Review - October 1984.

★★SPECIAL OFFER★★

Buy three titles and deduct £4.00

Add 50p p&p per order. Please state BBC or ELECTRON or 40 or 80 track for discs.

Golem Ltd, Dept A, 77 Qualitas, Bracknell, Berks RG12 4QG. Tel: 0344 50720

A J SOFTWARE for BBC



'The Record Changer'

32K £19.95 Cass. £24.95 Disc.

for indexing, membership lists, directories, inventories, budgeting, etc, etc.

don't buy a database in the dark -
check the spec!

'The Wordsmith' 32K for Centronics 737/739

AND NOW FOR EPSON FX80:

£19.95 Cass. £24.95 Disc.

Options Timetable 32K

£14.95 Cass. £19.95 Disc.

Simple Word Processor 32K

£9.95 Cass. £14.95 Disc.

Picture Maths

£9.95 Cass. £12.95 Disc.

An arithmetic practice program for primary schools.

Character Definer £9.95 Cass.

Enlarge, reduce, etc, etc.

Tape Catalogue £5.95 Cass.

Catalogue all your tapes using this program and never lose one again

Copy Disc £9.95

Copy disc to tape, tape to disc, M/C, Data or Basic.

ROM Read

£8.95 Cass. £11.95 Disc.

A machine code program to read the contents of any ROM socket and copy to RAM, tape or disc. Not to be used for illegal copying.

Machine code Disassembler

£5.95 Cass. £7.95 Disc.

Open Evening Timetable 32K

£14.95 Cass. £19.95 Disc.

Utility Eprom £19.95

for basic programmers

Mitsubishi Disc Drives

Dual 80 Track 800K £380 + VAT

Single Track Drives

Dual Sided 200K £199 + VAT

Double Density Disc Interface £85 + VAT

The best there is.

Epson Printers

FX80 £370 + VAT

RX80 £270 + VAT £8.00 Carr

BBC Epson Cable £15 + VAT

Normende

Not only the cheapest, but the best

Switchable 14" RGB Monitor/Colour TV £250 inc. VAT and cable, £8.00 carr.

Royalties for quality software

All prices VAT inclusive except where shown

AJ Vision Service Ltd, 43 The Drive

Loughton, Essex IG10 1HB

Mail Order Only


DEFINE

A MULTICOLOUR SPRITE CREATOR, EDITOR & ANIMATION CONTROLLER FOR THE BBC B COMPUTER

DEFINE is a suite of programs providing all the sprite and animation facilities needed to produce high speed arcade type games using your own multicoloured characters (sprites).

The package is extremely easy to use, every command being made with a lightpen, or joystick, directly from the screen. Real size and enlarged views of your sprites are continuously updated while you define or edit them and you may test animation sequences in the editor package as you go along. New sprites may be created by editing old versions and the number of sprites you may define is unlimited. Sprites may be any size up to 12×16 pixels and each pixel may have any of the 16 standard mode2 colours. The software needed to animate your sprites is provided as a separate program, which you can merge into your own BASIC, or machine code, program, allowing high resolution positioning with fast, simple commands. The number of sprites, or clones, you may have at any one time is unlimited (except by computer memory) and the speed of movement can be very fast if desired — over 400 sprites per second may be printed from BASIC, or 700 per second from machine code. Of course, you may link sprites in your own programs, producing giant sprites, or sub-animation. A 24 page handbook is supplied as well as a BASIC example program.

LIGHTPEN OR JOYSTICK CONTROLLED

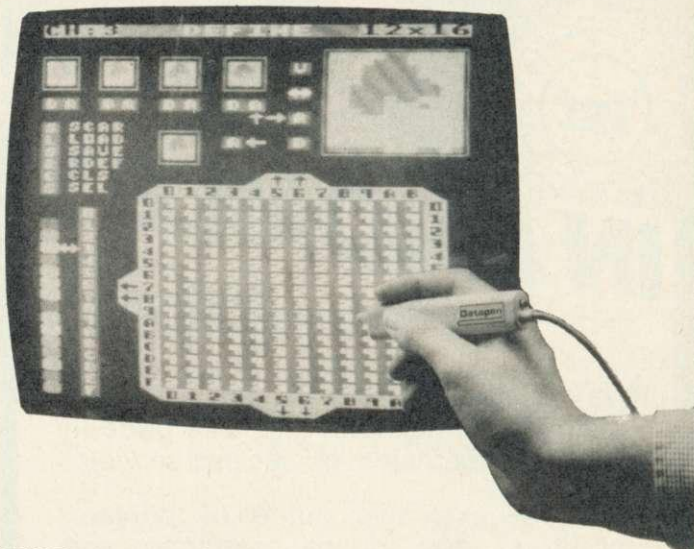

DEFINE	tape version	£9.95	All prices inc. VAT & Postage
DEFINE	disc version	£11.95	
Datapen Lightpen Pack (optional)		£25.00	

(Software included with lightpen; introduction and 2 drawing programs)

Datapen

Datapen Microtechnology Ltd., Kingsclere Road, Overton, Hants RG25 3JB
TEL: (0256) 770488

University Software

UNISTAT

STATISTICAL PACKAGE

MULTIVARIATE REGRESSION: Main output consists of estimated coefficients, t-stats, standard errors, R^2 , corrected R^2 , standard error of regression, F stat, and Durbin-Watson stat. Further output options: multiple correlation matrix, var-covar matrix, ANOVA of regression, residuals, plot of residuals, interpolation. Data options: Log/ln option for each variable, no-constant regression, choice of dependent variable, selection of independent variables, auto-omission of linearly dependent variables.

ANALYSIS OF VARIANCE, SCATTER DIAGRAMS AND TIME SERIES PLOTS: One-way and two-way (without interaction) ANOVA tables, scatter diagrams of paired data and time series plots with auto-scaling.

STATISTICAL TESTS, CORRELATION COEFFICIENTS AND PROBABILITY DISTRIBUTIONS: Basic stats on each column of data (size, sum, mean, variance, std. dev.). Chi-square (contingency table), t (one sample, two sample, paired), F, Mann-Whitney U, and Wilcoxon signed rank tests. Pearson's, Spearman's rank and Kendall's rank corr. coeffs. Chi-square, t, F, binomial, Poisson and normal (std., non-std.) distributions. Results of tests and corr. coeffs are displayed with significance levels.

DESCRIPTIVE STATISTICS, FREQUENCY DISTRIBUTIONS AND HISTOGRAMS: Analysis of raw data or data with frequency counts. Raw data sorted and grouped. Choice of lower bounds and class intervals. Absolute, cumulative and relative frequencies. Histograms with up to 200 classes. Output displays sum, mean, mean deviation, median, variance, std. dev., 3rd and 4th moments, skewness, kurtosis, range, etc.

All programs are datafile compatible with Matrix Operations program in UNIMAX package. Data matrix capacity examples (columns by rows): **CBM-64:** 2x1250, 5x700, 10x380, **BBC-B:** 2x750, 5x400, 10x200, **48K Spectrum:** 2x1800, 5x900, 10x500. **CBM-64 (disk):** £85, **BBC-B (disk):** £85, **48K Spectrum (mdvcart/cass):** £60

UNIMAX

LINEAR PROGRAMMING PACKAGE

LINEAR PROGRAMMING: A powerful and instructive optimisation program capable of handling all sorts of linear programming problems (min/max, any combination of \leq , $=$, \geq constraints and $x_i \geq 0$, $-a < x_i < a$ sign constraints). Primal, canonical, dual and their solutions are displayed in standard mathematical form. Unbounded problem and no feasible solution prompts. Edit option for all inputs. Capacity examples (variables by constraints): **CBM-64:** 10x35, 25x30, 40x25, **BBC-B:** 10x25, 20x20, **48K Spectrum:** 10x45, 25x35, 50x25.

MATRIX OPERATIONS: Inversion, transposition, determinant, pre- and post-multiplication, scalar multiplication, addition and subtraction of matrices and vectors. Any output can in turn be used as the input of the next operation without re-typing. Matrices can be saved or loaded at any stage. Datafile compatible with UNISTAT package. Capacities: **CBM-64:** 35x35, **BBC-B:** 25x25, **48K Spectrum:** 45x45.

CBM-64 (disk): £60, **BBC-B (disk):** £60, **48K Spectrum (mdvcart/cass):** £45

ALSO AVAILABLE FOR 48K SPECTRUM
INTRODUCTION TO ECONOMICS SET: £25
ECONOMIC GEOGRAPHY: £9.95 • BIBLIOFILE: £9.95
POLYNOMIALS: £6.95 • INTEGRATION: £6.95

To: **UNISOFT LIMITED**
(Dept. D) 29 ST PETER'S STREET, LONDON N1 8JP.
TEL: 01-359 0978

Prices include VAT and delivery within the UK. For orders from Europe add £1.50, outside Europe £3.00 per item for airmail post. Dealers enquiries welcome.

COMMODORE 64, BBC-B, 48K SPECTRUM

- * Comprehensive user manual
- * Full data handling facilities (display, print, change, save, load)
- * All results can be printed out *



SYSTEMS

SANYO 555 Q


IBM compatible, 128K RAM,
2 x 360K Drives. Price includes: Wordstar,
Mailmerge, Info-Star and Calc-Star.



(Monitor available at extra cost) £999

BBC-B £379


Full range of
Software and Disk Drives available.



BBC-B WITH DDFS £456.00

ELECTRON £189

Includes free software tape

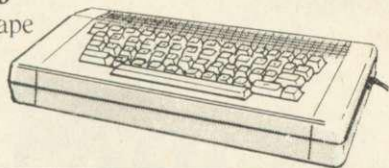

PRINTERS


Brother Printer HR 15 £399

Juki Daisywheel 6100 £389

EPSON RX80 FT £269

EPSON FX80 £379

Including lead for BBC.



DISKETTES

Control Data, in packs of 10

SS 40tk.....£16.00

DS 40tk.....£19.98

DS 80tk.....£26.00

Including VAT, p&p.

Microware's prices must be hard to pass up!

DISK DRIVES

200K-400K-800K



plus new 3 1/2" range
(including manual & formatter)

100k single unit	£99
200k dual unit	£199
200k single unit	£155
400k dual unit	£249

400k single unit	£169
800k dual unit	£299
Switchable	+ £15
PS unit	+ £25

UDM DDFS £95

WITH Disk Drive £79 **only**



MONITORS

Microvitec colour


Normal res. £199

Medium res. £249

High res. £399

Sanyo BMC 12" C £110

AP = + £25




Call for our full price list.

ACCESSORIES

BBC Stands.....£15.00

Dust covers.....£5.60

(for BBC,
Drives and
Printers)



Disk storage boxes.....

£15.00 (takes 35)

Disk storage boxes.....

£20.00 (takes 80)

Prices include VAT, p&p.

ORDER FORM

Product	Price	Qty.	Total
			£
			£
			£
			£
			£
			£
			£

All prices include VAT & delivery

I enclose my order for the above products.

TOTAL SUM ENCLOSED (Cheque or credit card no.) £

ALL PRODUCTS ARE BRAND NEW, BOXED AND OFFERED WITH FULL
MANUFACTURERS WARRANTY. All prices include VAT & delivery

MICROWARE

14, Charles Street · Hanley · Stoke-on-Trent
· (0782) 269 883

67, Westow St. · Upper Norwood · London SE19

· 01-771 6373

2/4 Paul Street · London EC2

· 01-247 8577

637, Holloway Road · London N19 5SS

· 01-281 2431

Name _____

Address _____

Signed _____

Electronequip

(Authorised Torch Dealer and Full Unix Advisory Centre)

ACORN DISC UPGRADE
Now in stock **£115.00 inc VAT**

Starter Packs:



BBC Starter Pack

ANBOI/ANBSP **£399.00 inc VAT**

Disc Starter Pack

ANBS 001 **£499.00 inc VAT**
(BBC 'B' + DFS + Microdrive + 3 games)

BUSINESS STARTER PACK

ANBS 002 **£899.00 + VAT**

BBC 'B' + DFS + Disc Drive,
Monochrome Monitor, Dot Matrix
Printer, Word Processing,
Spreadsheet and Database

Electron Starter Pack


ALAOI/ALASP **£229.00 inc VAT**

Networking Torchnet/Econet

Advanced connection techniques used on our networks considerably reduce joint resistance ensuring lower end to end resistance than by any other method.

All our BBC's and Torches are networked together. Are yours:

If not phone 0329 230671.

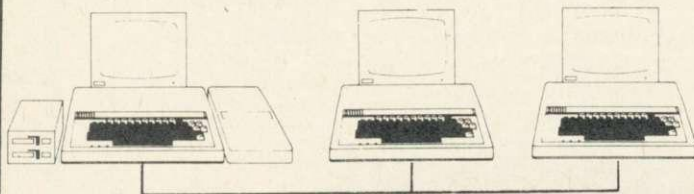


Electronequip

59 West Street, Fareham, Hants (0329) 230671

NORDMENDE

14" TV/Monitor
£199.00 + VAT




Remote version **£219.00 + VAT**
Offer includes RGB/BBC cable.

Buy this superb TV/Monitor from the original distributors (since Sept '82)

TAXAN/KAGA * KP810

£277.39 + VAT



Printer price **includes** paper and BBC interface cable.
Screen dump rom available for £11.50

TORCH Disc Pack SPECIAL OFFER


Only **£659.00 + VAT**

(Free fitting available if required).

3" Micro Disc £59.95 (inc. VAT)

**Disc Interface &
Drive**
£174.95 inc. VAT)

Micro Disc Drive for
the BBC Micro



The Micro disc drive offers a method of low cost quick access to programs. The drive is essentially a small version of a 5¼" disc drive and offers similar features to the larger drive. The data is stored on a 3" disc, this is enclosed in a protective hard plastic cassette which features a write protect switch. The micro drive requires the standard Acorn disc interface, but a new disc filing system rom. Acorn DFS may be exchanged for the micro DFS for £2.30. The new micro disc filing system can read and write to Acorn DFS discs. Thus if a 5¼ inch and a micro floppy were connected on the same cable files could be transferred between them.
Capacity: 80.64 K bytes **Transfer Rate:** 125k bit/s.

BRANCHES

**MAIL ORDER: 36-38 WEST STREET
FAREHAM, HANTS. (0329) 230670**

**SHOP/TECHNICAL: 59 WEST STREET
FAREHAM, HANTS. (0329) 230671**

KINGS LYNN: 17 TENNYSON AVE. (0553) 3782



(Authorised BBC Micro Dealer, and Econet service centre)

195

EPROM PROGRAMMER


for the BBC micro

An exceptionally versatile unit, programs EEPROMs and EPROMs from 2K to 32K.

Powerful, easy to use software in a sideways ROM. Features full screen data editor, files, and softkeys.


Professionally designed hardware ensures reliable and safe programming, also detects badly socketed EPROMs.

Soundly constructed in a convenient flip-top box which protects unit when not in use. Supplied with a comprehensive manual.

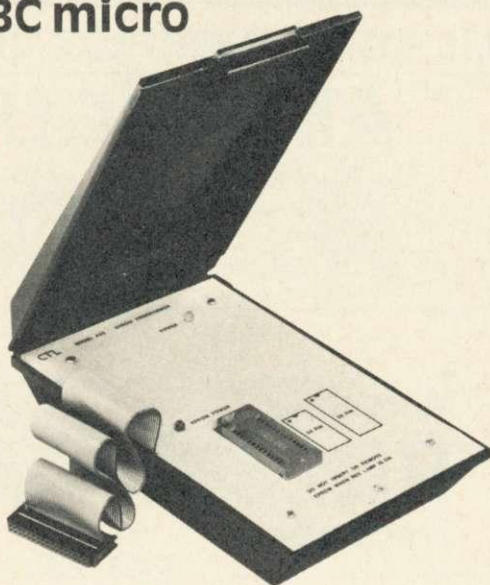

£95 (excl VAT, free P&P)

2 year guarantee. Detailed information on request



Control Telemetry of London
Unit 11, Burmarsh, Marsden St.,
London NW5 3JA Tel: 01-482 2177

BBC POOLS PREDICTOR

WITH 11,000 MATCH DATABASE

Now in its 3rd successful season, Mayday Software's Pools Predictor has been made even more powerful with a new and unique 11,000 match database. Seven separate forecasting techniques have been combined to give you the best forecasts yet. And, just as easy to use, is our new Racing Analyser. This uses the racecard from your daily paper to analyse any horse race—and it's yours for no extra charge!

..... Also available for the Spectrum.....

MAYDAY SOFTWARE

**181, PORTLAND CRESCENT
STANMORE, MIDDX HA7 1LR**

FREE RACING ANALYSER

**BOTH PROGRAMS
FOR ONLY**

£8.99

Second Byte

Mum: Turn that thing down.

Boy: But mum I can't.

Mum: Oh yes you can if you buy a Second Byte volume control.

Yes a volume control that fits neatly onto your BBC A or B. Easily fitted in five mins with no soldering or cutting required.

Just send £7 which includes VAT & P&P to.

Second Byte,

31, Sapphire Ridge, Waterlooville, Hants. PO7 8NY.

Please allow 14 days for delivery.

PROFESSIONAL MUSIC FROM THE BBC MODEL B

MUCH MORE THAN JUST A SYNTHESIZER...

32 Harmonically Programmable Oscillators
32 Programmable Envelopes
Five Octave Keyboard
Up to 4 Osc/Envs per note
Touch Sensitive Keyboard
Programmable Stereo Sound
Real-Time Polyphonic Sequencer

The New Digital CLEF CMS

Price £495
inc VAT & UK carriage

S.A.E. OR PHONE
FOR FURTHER
INFORMATION

CLEF PRODUCTS (ELECTRONIC) LIMITED

(Dept Au3) 44a Bramhall Lane South, Bramhall,
Stockport, Cheshire SK7 1AH. 061-439 3297

AT LAST!



THE ANSWER TO FINDING GOOD QUALITY SOFTWARE FOR YOUR BBC/ELECTRON

MEMBERS RECEIVE:

- ★ Discount prices on all Tapes & Discs
- ★ Information & Advisory Service
- ★ Regular Newsletter
- ★ Free Postage on 3 or more Titles
- ★ Rapid Delivery
- ★ No Obligation to Purchase

ALL FOR ONLY £3.00 PER YEAR!

Send large SAE for Catalogue & full details

THE BRAIN TRAIN CLUB
NORTHINGTON HOUSE
59 GRAY'S INN ROAD LONDON WC1X 8TL



PRINTERLAND

UK'S LOWEST PRINTER PRICES

ORDERED TODAY - DELIVERED TOMORROW

DOT MATRIX

	EX VAT	INC VAT
BROTHER HR5	£133.00	£152.95
SHINWA CPA80	£185.00	£212.75
EPSON RX80	£185.00	£212.75
EPSON RX80 F.T. +	£212.00	£244.80
EPSON RX100 F.T.	£347.00	£399.05
EPSON FX80	£314.00	£361.10
EPSON FX100	£425.00	£488.75

DOT MATRIX PLUS NEAR LETTER QUALITY

KAGA 810	£259.00	£297.85
CANON 1080A	(Special Price) £249.00	£286.35
KAGA 910	£349.00	£401.35
CANON 1156	£349.00	£401.35

DAISY WHEEL

QUENDATA 1120	£225.00	£258.75
JUKI 6100	£325.00	£373.75
DX 100	£356.00	£409.40

DISK DRIVES

5 1/4 100K S.S.S.D CASE AND CABLES	£80.00	£92.00
------------------------------------	--------	--------

ACCESSORIES

WORDWISE +	£43.00	£49.45
BOX 10 DISKS	£14.00	£16.10
BBC PRINTER CABLE	£10.95	£12.59

UTILITIES

COPY-ALL COPIES 99% OF PROTECTED DISKS	£10.25	£11.79
REPLICA II • THE TAPE TO DISK COPIER	£9.25	£10.63

Educational, G'ment plus O'seas Orders Welcome
Delivery Printers (Securicor) £10.00

Printerland, Unit 27, Estate Buildings, Railway St., Huddersfield HD1 1JP
Showroom open Mon - Fri 9 - 6 pm. Sat morn 9 - 1 pm.
Tel: Huddersfield (0484) 514105 or (0484) 687875.

Acorn User has been alerted to the abuse of the free ad service and, regrettably, can no longer accept entries selling or swapping software.

WANTED Acorn 0-9 or 0-98 DFS. Must bring to check. Also any users wanting to swap programs and ideas, etc. R Hurley, 21 Finch Avenue, Sandal, Wakefield, West Yorks. Tel: Wakefield 258596.



EXPANDABLE CONSOLE FOR BBC MICRO

As supplied to Universities, Colleges, Schools,
business & home users



FREE Security Bracket available to schools etc. on request.

A professional console to house disc drives/2nd processor/Torch dual drives/teletext, etc. All untidy wiring out of sight in the strong aluminium console in a matching textured colour. AVAILABLE NOW a bolt on extra module for extra expansions.

Also available a matching printer stand, yes stack your paper under the printer.

ALSO VDU STANDS AVAILABLE

Torch version available



ELECTRON CONSOLES

The console houses the electron and will safely support the expansion interfaces which plug into the rear of the micro, supports the VDU and tidies up all wiring, allows expansion to disc at a later date.

PRICES

Special Torch Version £46.99 + £4 p/p
BBC Console £44.99 + £4 p/p
Bolt on expansion £14.99 + £2 p/p
VDU/Printer Stand £14.99 + £2 p/p
Electron Console £34.99 + £4 p/p

Please add VAT @ 15% to all prices

For further information enclose sae or send cheque to,

Mail Order Only **Silent** 01-801 3014 27 Wycombe Rd London N17
Viewing by arrangement **COMPUTERS** 24 hour ansaphone
Please allow 28 days for delivery

IMPROVE YOUR BRIDGE PLAY

A program that presents hands similar to newspapers and mags. Each hand illustrates a point in play or defence. No bidding to worry about. At the end of each hand the computer tells you how many mistakes you have made and sums up the hand. You may see all four hands and the solution before starting play if you wish. All hands are predetermined. Go back to a hand at any time. No running backwards and forwards of cassette or disc. A grand slam with only 5 pts, or not making a trick with 33 pts. Interested?

Send cheque or p.o. to

V. Milburn, 61 Hainault Road, Chigwell, Essex IG7 5DH.

At present for BBC mod B only. Program 1 for intermediate players. Program 2 for not quite beginners. Cassette £7.95 P&P included. 5.25 disc £9.95 state 40/80 track.

Please state which program required.

Other micro owners please write, we would like to know if there is a demand.

CROSSWARE CROSS-ASSEMBLERS

FOR THE STAND-ALONE BBC MICRO

Available on disc for the following processors:
6800/6801/6802/6301, 6805/146805, 6809 Z80, 8080A/8085

And now the 68000

Phone or write for full details.

CROSSWARE PRODUCTS
Melbourn, Royston, Herts SG8 6BA
Tel: 0763 60838

ACORN USER ADVERTISEMENT PAGES - APRIL ISSUE

A J Vision	191	Mayday Soft	196
A&F Software	173	Meadow Computing	128
AB Designs	127	Mertec	138
AB Electronics	66	Microdis	137
Abacus Business Systems	128	Microfast	142
Acorn	152	Microman Computers	160
Akhter	62/63	Micronet	30-32
Altra Roms	148	Microresources	140
AMS	4/5	Microvitec	172
ARA	42	Microware	195
Aries Computers	137	Microworld	1
		Microwriter	64
Beebug	27	Micro-Media	42
Beebugsoft	88/89	Micro-Peripherals	72
Bel-Tech	150	Midwich	40
Bel-Tech	158	Mighty Micro	160
Bizzell Computers	122	Milburn	198
		Minic Business Services	128
Cambridge Micro Centre	81	MRH Systems & Software	198
Care Electronics	180	Musicsoft	68
Chase Data	124/125		
CJE Micros	146	Newark Video Centre	190
Clares	182/183	Northern Computers	58
Clef	196		
Comlex	42	Opus	114/116/118/120
Commercial Products	178		
Commotion	74		
Computer Concepts	174/175	Pace	147
Contex	130	Penman Products	145
Control Telemetry	196	Philips	16
Crossware Projects	198	Printerland	196
Cumana	171	Prosoft	130
C Tech Computers	132		
		Ramamp	145
Datapen	192	RSD Connections	160
Datastar Systems	8	Rubycrute	122
Datastore	191		
Diamondsoft	128	Second Byte	196
Dimensions Graphics	11	Shumwari	190
Discotechnology	10	Silent Computers	198
Disking	28/29	Smith Corona	71
		Softlife	130
Electronequip	193/194	Solidisk	22-26
Eltime	122	Synergy	162
Essex Engineering Soft	178	System	178
First Byte	196		
		TEC Media	149
GCC (Cambridge)	134	Technomatic	33-38
Gemini	166	Torch	12/13
Golem	191	Touchmaster	19
Griffen	178	Twillstar	44/45
Ground Control	156		
		Unisoft	192
HCR Electronics	168		
		Viglen	184-189
Interface	190	Vine Micros	168
Intergalactic Robot	82	Voltmace	14
Island Logic	76/77	Vulcan Electronics	154
LCL	68		
Leigh Computer Systems	156		
Limbic Systems	20/21	Watford	48-56
Logo Software	68	Wiltshire Computer Centre	122



Odd One Out: "Good program in a good series" - Primary Teaching & Micros.

for Infants

Programs devised by an experienced infant teacher and a computer specialist:

Infant Maths Series

1. **Ordering:** placing 2-8 objects in order of size.
2. **Odd One Out:** a visual perception exercise.
3. **Position:** teaches 'top, bottom, left and right'.
4. **Shapes:** copying pictures with choice of shape, size and position. Mistakes visible and easily rectified.

Reading and Language Development Series

1. **Beginning reading and writing:** flashcards, letter formation.
2. **Matching:** words and pictures, also colours.
3. **Sentences:** matching and completing sentences.
4. **Prepositions:** find Ida the Spider!

For the BBC Micro (1.2 o.s.) £8 each (cassette), £10 each (disk) or £25 each complete series (on cassette or disk) including p. and p. from:

MRH Systems and Software, 20 Highfield Road, Kidderminster, Worcs. DY10 2TL

WANTED BBC B disc drive, sideways RAM, etc. Exchange: Linhof Super Technica 2 1/2 x 3 1/2, grip lenses and shutters, Super Rollex, plate holders, sports case etc. Phone Gloucester (0452) 60093 evenings or weekend.

200 K(SS/SD) 80 trks drive with utility disc and cables. VGC. £100 ono. Original packaging and box. Call between 6.30pm and 7.30pm on 01-439 0192 Mon-Fri (Benny). Manual (DFS) also included.

6502 second processor for sale (Acorn) inc. ROMs, or trade for colour monitor or Teletext Adaptor or Grafpad & money. Offers? Tel: (0742) 454739.

GRAPHPAD digitising tablet with electronic pen and drawing software. Bargain at £105. Phone Roger on 061-799 9845 evenings. (Manchester).

DDFS Microware double density interface, with new 1.2 ROM, all chips and manual. Easy to install. £70. Tel: Swindon (0793) 37992.

AMERICAN personal/hobby computer magazines for sale or exchange. SAE list. Smith, 84 Edenfield Gardens, Worcester Park, Surrey KT4 7DY.

WANTED BBC B. Up to £225 paid. Also peripherals. Phone daytime 051-424 5558.

CUMANA disc drive for sale. Single sided, 40 track, with power supply. Little used, £99. Tel: St Albans (0727) 32214, evenings.

HELP required with advanced use of Juki 6100 and any suggestions for form filling programs. Telephone Nagy at 01-450 7811 ext 276 or evenings at 01-205 6213.

SEIKOSHA GP100A plus sheet feed attachment, spare ribbon and Watford Beebprinter ROM software. VGC, boxed, £140. Tel: Winsford (06065) 51461.

BBC model B computer with Acorn DFS and 100k disc drive - £600. Price includes £100 worth of books and software and ten floppy discs. Phone 01-348 6401 evenings. Microvitec RGB monitor, £180.

ACORN Teletext Adaptor with TFS ROM, under guarantee. Save £50 on list price, £175. Edinburgh. Tel: 031-445 3417.

£3000 TRS80 Model 4 64k twin discs, Seikosha GP550A printer, many discs, programs, books, manuals, programs model 3/4. Offers or exchange for BBC B with disc plus cash adjust. Ring am/pm with offer. 0473 85526.

GERMAN BBC user. Ideas on hardware and software wanted. Used modem, disc, printer. Number of friends are users in Germany and Belgium. Lars Steinsträber, Grüner Bogen 44, 2000 Oststeinbek, FRG. Hello World!

To hire a BBC computer of peripherals, ring Computer Hire Services on 01-607 0157. 294a Caledonian Road, London N1 1BA. We also hire out Spectrums, Commodore 64s and Amstrads.

Joysticks Now with 'Accutrak' analogue movements for games and CAD/CAM applications. Still best value at £12.95 per pair. Send now to: Peritron (Dept AU), 21 Woodhouse Road, London N12 9EN.

Speech-editor for Acorn speech system. Download PHROM/slice words/control parameters/ramdisk-type filing system. Cassette/instructions £8 (or details). Fylesoft, 15 Carmelite Crescent, Eccleston, St. Helens WA10 5LP.

How-To. An essential collection of S/W plus instructions for frustrated new disc owners. £5. Many satisfied users, R-Soft, 22 Marriotts Close, Felmersham, Beds MK43 7HD. 0234-781730.

Elite How to fully equip your ship and obtain as many credits as required, quickly, without leaving station. £2.25. Knight, 59 Market Street, Hindley, Lancs WN2 3AE.

RML to BBC. Transfer RML programs, data, text to BBC format. Supplied on disc, £12. Cheque/requisition: Foxsoft, 22 Canterbury Close, Doncaster DN5 8NR.

CAD For BBC B with 144 colours. £7.99-cass, £9.99-disc. State 40/80 trk. SAE for details or cheque/PO to G. Davey, Old Threel House, Albourne Place, Albourne, West Sussex.

Floppy-Disc head cleaner - don't risk corrupted discs and lost data. Memorex 10 disc kit, £8.95 + 75p p&p. Heath Micros, 162 Bardon Road, Coalville, Leics.

Learn to speak French, German, Spanish or Italian. See and Hear £7.95 (inc). Please state language BBC 32k. Electron. TBS, 29 Holloway Lane, Amersham, Bucks. 02403 21702.

'Nutcrackers': Tape 2 Tape + Tape 2 Disc + Disc 2 Disc + Disc 2 Tape: £5. Rompull + Tapedump: £5. Super disc menu: £5. ROM-filing system generator: £5. R-Soft, 22 Marriotts Close, Felmersham, Beds. MK43 7HD. 0234-781730.

LVL disc drive: dual 40 track drives + utilities disc and manual, £300. Tel: St Cross 247 after 6pm.

Music. Complete performances series offers superb J S Bach for 32k BBC B. Brandenburg Concertos no. 3 in G, no. 6 in Bb, Toccata & Fugue in Dmi at £5.75 each. DotSoft, PO Box 46, Hitchin, Herts, SG4 0XQ.

6502 assembly language training. Ten week course, evenings. Also beginner's Basic course. Tel: 041-332 9445. Joytek Micro Training, 205 Buchanan Street, Glasgow G1 2JZ.

Acorn AP100A printer. Two text modes, dot addressable graphics. Perfect condition. Manual, ribbons, leads, paper, free screen dump. £135 inclusive. Tel: 01-959 6075.

Listings BBC and Electron, from cassettes, 5p per 58 line. Minimum £1 inc. p&p. Send tapes and payment to Printa-prog, 149 Netherton Road, Wishaw ML2 0AR.

5 1/4" discs Inclusive prices per 10, Dyan SS/DD £20, DS/DD £28, SS/DD (96 tpi) £28, DS/DD (96tpi) £35. Rhone-Poulenc SS/DD £17. CWO. Squirrel's Byte, 7 Coniston Road, Melton Mowbray, Leics LE13 0NE. (0664) 63617.

We must remind advertisers that we cannot carry advertisements which incite readers to break the protection and therefore copyright of commercial software.

Modem or telephone DIY extension kit. Contains new style socket, 15 meters of cable & full instructions. Why pay BT £25 when you can do it for only £9? Cheques to P Adamson, 55 Heol-y-Frenhines, Bridgend, S Wales.

Card Games series offers Partner Whist for 32k BBC B. Realism to suit players of all levels, £6.75. Also Draughts £6.75, Darts £4.75. DotSoft, PO Box 46, Hitchin, Herts SG4 0XQ.

Spider Speller. New, exciting, educational game for the BBC (B). 155 word vocabulary, joystick option, two skill levels, high score. Cassette £5, mail order only. Viking Software, Dept A1, 58 Central Avenue, Syston, Leicester LE7 8EE.


Backups of your valuable protected disc software are essential for your peace of mind. TWIN will provide them for 40 or 80-track discs - never known to fail. £8. J. E. Connett, Dene Croft, Westcott Street, Westcott, Dorking, Surrey RH4 3NY.

Laser Attack. New BBC (B) game for 1 or 2 players, 5 skill levels, joystick option, target score for replay, table of merit, high score. Cassette £5. Viking Software, Dept A1, 58 Central Avenue, Syston, Leicester LE7 8EE.

View printer driver for Star Gemini 10X. Supports: underline, emphasised, double-strike, super/subscript, enlarged, italic, pica, elite, condensed, special and international character sets in any multiple combination allowed by Gemini 10X. Tape £4, disc £5. Enquiries SAE. C. Duckworth, 2 Orchard Terrace, Mill Hill, London NW7 4EA.

£10 SMALL AD SERVICE

Please include your cheque for £10 made payable to Redwood Publishing. This is the standard fee. Don't forget your name, address or phone number. Send cheque plus form to Acorn User Small Ads, 68 Long Acre, London WC2E 9JH.

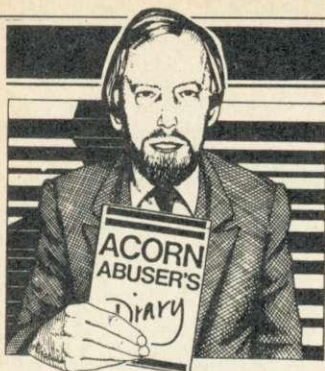

Guy Kewny provides this month's April Fool.

200

New Elite is hot stuff

Details are emerging from Acornsoft of *Elite II*, thought to be the best thing since the Paul Daniels magic cheese grater. Instead of being a 6502 second processor version, as reported in some less reputable rags, it is in fact a multi-user version for the Econet.

Codenamed 'Braben' while Acornsoft trademarks the name 'Elite', it enables up to 253 players to take to the universe in a variety of roles. Players may choose between piloting trading ships, police ships or Thargoid craft, while some of our lady readers may like to try their hand at being space-stations.

An early version of the game is said to have been responsible for the major fire at Betjeman House, Acornsoft's HQ, just after Christmas. Apparently, games guru Neil Thunder-Storm discovered a bug that enabled him to pilot a sun through hyperspace and into space stations all over several galaxies.

This created unexpected strain on several of the Econet stations, one of which overheated and caught fire. Acornsoft's Jeremy Fire-Engine reports: 'The bug was quickly corrected - it doesn't make any difference to the competition.'

Acornflakes

News is just coming in of a successful takeover of Acorn by the foods giant Kellogg's. R&D staff at Cherry Hinton are already developing products for the revised range.

These include the Acorn Breakfast Computer, which is rumoured to have dual 3.5in toasters, full 96-shreddie keyboard, cereal interface, digital alarm clock and optional Teasmaid

adaptor.

Cornflakes packets are to be introduced offering free Electrons with two tops (limited to 1000 per household), and for budding composers we can expect the Noises 500 add-on which allows a variety of bells, whistles, snaps, crackles and pops to be produced on 13 channels simultaneously.

Meanwhile, the BBC micro is to be discontinued and replaced with an upgraded version including 64k WAM (Weetabix Addressed Memory), high-fibre graphics and the ADFS (Advanced Dieters Filing System) which is reputed to lose overweight files automatically (stone me!).

Trike of truce

To prove that no animosity exists between Uncles Clive and Chris, Sir Clive very generously gave Chris a C5. Chris commented: 'I was very touched, I've a great passion for cars. I offered Clive a ride in it but he declined. Apparently he doesn't want to retire yet.'

Pandora's box

Readers of last month's issue will recall Rob Fenton's graphics program called Paintbox.

We have recently received a dainty letter from Quantel which suggests this article infringes their Paintbox trademark! On the other hand Quantel systems start

at £72,000, so we can hardly be endangering their business! (And we're not the only magazine with this problem, but PO Box 109 refuses to comment. How come Pandora didn't have this kind of trouble?)

Heavy scene

Acornsoft's latest game, Magic Mushrooms, has really shaken up the Cambridge hippy market because it allows you to design our own trips! For readers with no experience of the capital of 'Silicon Fen', recall the words of John Peel who described it as a city of 'pot plants and muesli'. Geddit?!!

Boot boy

Now for some news from behind enemy lines. Uncle Clive won't have this rag in the house, and there's no chance of him ever hearing my dynamite revelations from anyone else, so here goes.

He's been on top form since his pub brawl - hopping around shadow boxing and practising his head butts on anyone he meets. Most of the staff have taken to wearing motorcycle helmets and sticking plaster over the bridge of the nose.

It's quite a sight, I can tell you - like a convention of aspiring Securicor guards who failed the aptitude test. He's determined to grind 'Rhogan Josh', as he calls poor Mr Curry, into the dust.



Thankfully, his pugilistic endeavours have taken his mind off the rather mixed reception given to his marvellous car, or the 'surgical boot' as we insiders know it.

Despite opposition from feminist groups, plans are underway for a lady's high-heeled model. Also on the drawing board are an executive model, carpeted throughout with specially developed kingsize OdorEaters, and an off-the-road, three-wheel drive version using the most modern elastic band technology for its up-rated engine.

Getting the Bird

Silver Acorn winners at the recent Acorn Useless awards:

Best Fictional Serial - Jane Bird, 'I'll tell it my way.'

Jolly Roger Ideas award - Guy Qoony.

Unkel Kleiv Bathtub award for creative marketing - Nigel Searle.

Redwood 'Biggest must be best' award - Harold Fisher for his ABCs.

Tom Hillbilly award for best leak - CC for the 'C'.

Best-kept secret - David Johnson - Hyperspace for Elite.

Most effective hype - David Johnson - Judder.

END

SINCLAIR C5 HIRE

14 years and over.

Can hire.

Delivery and collection locally. Radius 20 to 40-mile range.

Tel. for details and rates 01-959 3389



ACORNSOFT'S

TOP 10 BESTSELLERS

for the BBC Microcomputer

- 1 *Elite*
- 2 *ISO-Pascal*
- 3 *Seventh Star*
- 4 *ViewSheet*
- 5 *Acheton*
- 6 *Labyrinth*
- 7 *Paul Daniel's Magic Show*
- 8 *VIEW*
- 9 *Workshop*
- 10 *Bouncer*

PUBLISHED BY ACORNSOFT

SPECIAL OFFER!
Deduct £1 per
cassette when
ordering 2
or more.

TEMPEST

ACORN
ELECTRON
BBC
MICRO

◆ AN ARCADE-GAME EXPERIENCE ◆



TEMPEST

£9.95 cassette/£11.95 disc

At last, a program for the BBC micro and Acorn Electron which faithfully recreates the arcade game of the same name. This is an official Atari-approved version of Tempest — the screen grids, the aliens, the colours and the style of play are all as close as possible to the arcade original. You are armed with a Blaster and a Super Zapper to defend yourself from the encroaching Flippers, Spikers, Flipper Tankers, Fuseballs and Pulsars which move along the grids of the stargate. There are 255 increasingly difficult levels of play, including invisible grids as you become more advanced. An excellent game, destined to become a 1985 top-seller, Tempest is available for the Acorn Electron on cassette, and for the BBC micro on cassette or disc.

OTHER TITLES AVAILABLE: £7.95 EACH ON CASSETTE

OVERDRIVE (BBC/ELECTRON)
SMASH AND GRAB (BBC/ELECTRON)
MR. WIZ (BBC/ELECTRON/C64)
SPACE PILOT (BBC)
BMX ON THE MOON (BBC)

STAR STRIKER (BBC)
JACK AND THE BEANSTALK (BBC)
COSMIC KIDNAP (BBC)
ALIEN DROPOUT (BBC/ELECTRON)
STRANDED (BBC/ELECTRON)

BATTLETANK (BBC)
HUNCHBACK (BBC)
SPITFIRE COMMAND (BBC)
WORLD GEOGRAPHY (ELECTRON/ 64)
ROAD RACER (BBC)

WE PAY UP TO 20% ROYALTIES FOR HIGH QUALITY BBC MICRO AND ELECTRON PROGRAMS.



SUPERIOR SOFTWARE LTD.

Dept. AU4, Regent House,
Skinner Lane, Leeds 7
Tel: 0532 459453



OUR GUARANTEE

- (1) All our software is available before we advertise.
- (2) All our software is despatched within 48 hours by first-class post.
- (3) In the unlikely event that any of our software fails to load, return your cassette to us and we will immediately send a replacement.

THE SCREEN PICTURES SHOW THE BBC COMPUTER VERSION OF TEMPEST.